



Madison Parks Division

210 Martin Luther King, Jr. Blvd., Room 104
Madison, WI 53703
608-266-4711 • cityofmadison.com/parks

play
**MADISON
PARKS**

January 25, 2019

NOTICE OF ADDENDUM ADDENDUM 1

CONTRACT NO. 8348

Revise and amend the contract document(s) for the above project as stated in this addendum, otherwise, the original document shall remain in effect.

SPECIAL PROVISIONS:

Remove & replace BID ITEM 90007. The revised BID ITEM 90007 is listed, below.

BID ITEM 90007 - PAVEMENT SEAL COAT - ACRYLIC

Work under this bid item shall include all costs associated with seal coating existing acrylic sport courts as specified in these special provisions.

SURFACE PREPARATION: All surfaces shall be power washed and cleaned prior to the application of acrylic resurfacer product. All surfaces to be coated shall be sound, smooth, and free from dust, lawn, dirt, and oily materials.

The Contractor shall note that water is not available at the site.

DEPRESSIONS: Prior to the application of surfacing materials, the entire surface shall be checked for minor depressions or irregularities. Contractor shall perform a flood test to identify and locate any depressions that hold more than a nickel's thickness of water. **Contractor shall contact Engineer a minimum of 24 hours prior to performing the flood test to coordinate a site inspection by the City.** After the court has been flooded and allowed to drain, any depressions meeting the depth requirements described above shall be corrected by applying a tack coat of diluted court patch binder. The binder shall be allowed to thoroughly dry prior to filling depression with court patch binder high strength acrylic latex bonding liquid.

FILLER COATINGS: To fill surface voids and provide a uniform surface texture, two (2) coats of mineral filled acrylic resurfacer shall be applied over the entire surface. Acrylic resurfacer shall contain only high grade, rounded silica sand, 40-70 mesh, at a rate of 12-16 lbs per gallon concentrate. Acrylic resurfacer shall be applied by rubber bladed squeegee. The first coat shall be allowed to dry thoroughly prior to applying second coat. The Contractor shall submit manufacturer submittals to the Engineer for approval prior to start of work.

FINISH COATINGS: A minimum of two (2) finish coats of Sportmaster®, Plexipave® or Laykold® textured acrylic color coating shall be applied over entire surface by rubber bladed

squeegee. Each application shall contain only high grade, rounded silica sand, 100 mesh, at a rate of 7 lbs. per gallon concentrated. Textured seal coat shall be dark green.

After color coating is complete, the Contractor shall install tennis court net tie downs and tennis court nets, both of which will be paid separately under Bid Item 90004.

Pavement Seal Coat - Acrylic as defined in this bid item shall be applied to the courts a total of two (2) times. The square yard quantity described in the bid tab reflects the quantity required to seal coat the 3,200 square yard area a total of two times.

The Contractor shall protect the court with barricades and/or construction fencing throughout the duration of the manufacturer's recommended drying time.

METHOD OF MEASUREMENT

Pavement Seal Coat – Acrylic shall be paid per square yard.

BASIS OF PAYMENT

Pavement Seal Coat – Acrylic shall be measured as described above and shall be paid for at the contract unit price which shall be full compensation for all work, materials, labor, tools, equipment, disposal, and incidentals required to complete the work as set forth in the description.

PROPOSAL:

Action	Bid Item	Description	Original Quantity	New Quantity
REPLACE	90007	PAVEMENT SEAL COAT - ACRYLIC	6400 SY	3200 SY

PLAN SET:

Remove & replace Sheet 1.4

CLARIFICATION:


The area to receive Pavement Seal Coat – Acrylic is 3200 SY; the description in the specification requires two (2) coats of both filler coating / acrylic resurfacer and finish coating/acrylic color coating.

Per Sheet 1.4, all gate posts shall be three inch (3”) outside diameter (O.D.)

Electronic version of these documents can be found on the Bid Express web site at:


<http://www.bidexpress.com>

If you are unable to download plan revisions associated with the addendum, please contact the Engineering office at 608-266-4751 receive the material by another route.

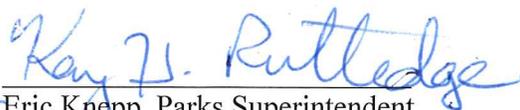for 
Eric Knepp, Parks Superintendent


NOTES

- 1.) FABRIC, FRAME WORK AND FITTINGS FOR CHAIN LINK FENCE PER DETAILS SHOWN ON THIS SHEET AND IN SPECIFICATION SECTIONS 90000-90002
- 2.) END / CORNER POSTS SHALL BE 3" O.D. SCHEDULE 40 WATER PIPE, GALVANIZED; LINE POSTS SHALL BE 3" O.D. SCHEDULE 40 WATER PIPE; RAILS SHALL BE 1 5/8" O.D. SCHEDULE 40 WATER PIPE, GALVANIZED; DRIVE ANCHORS SHALL BE 2' GALVANIZED SCHEDULE 40 PIPE; FABRIC SHALL BE 1 3/4", 11-GAUGE MESH, ALUMINIZED.

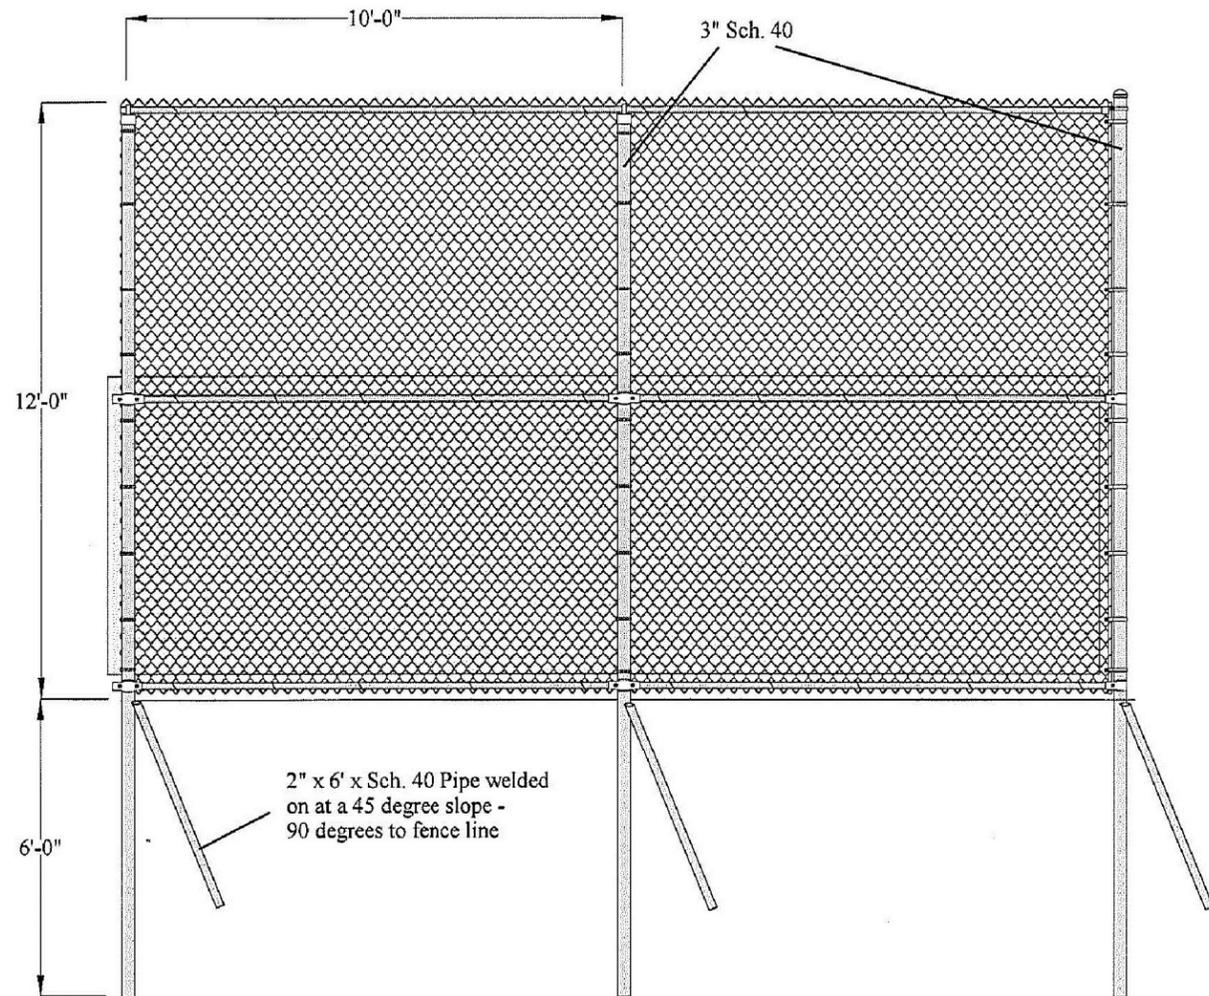


FABRIC	Height	Mesh	Gage	Selvage	Finish	TYPE
	12'	1 3/4"	11	KK	ALUM	
FRAMEWORK:	O.D.	WALL	WT PER FT	LENGTH		Schedule 40
END/CORNER POST:	3"	.203	5.79	18'		Schedule 40
LINE POST:	3"	.203	5.79	18'		Schedule 40
RAILS:	1 5/8"	.140	2.27	10' TYP.		Schedule 40

1 12' CHAIN LINK FENCE
NTS

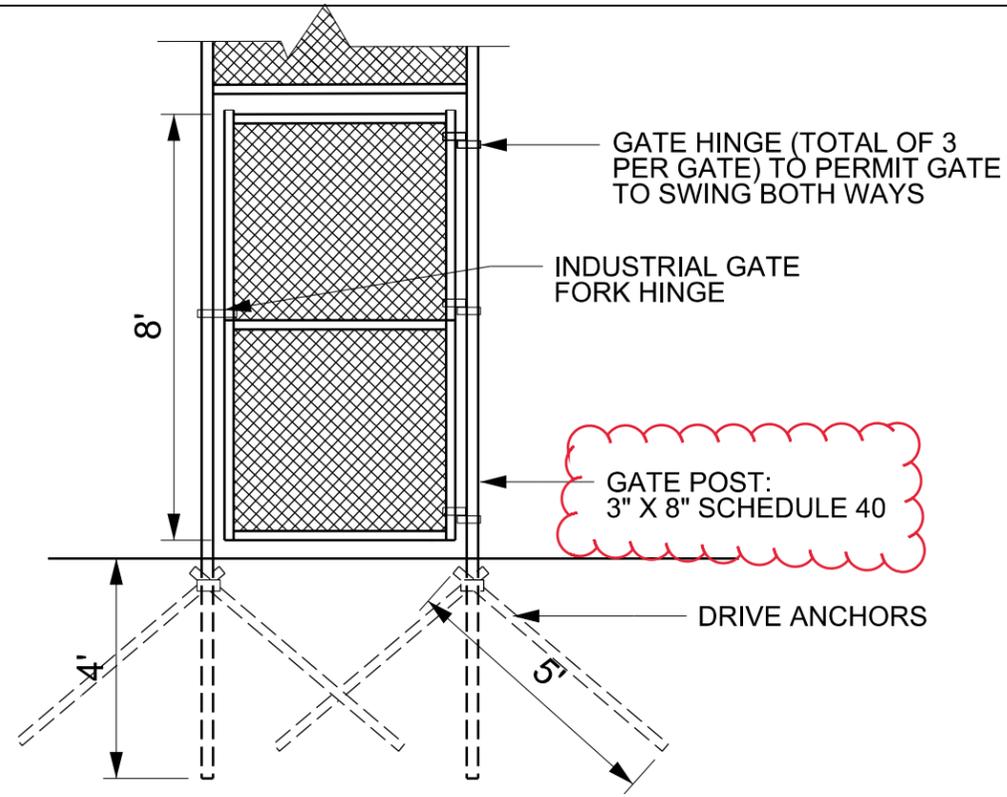

2 4' WIDTH FENCE GATE
NTS

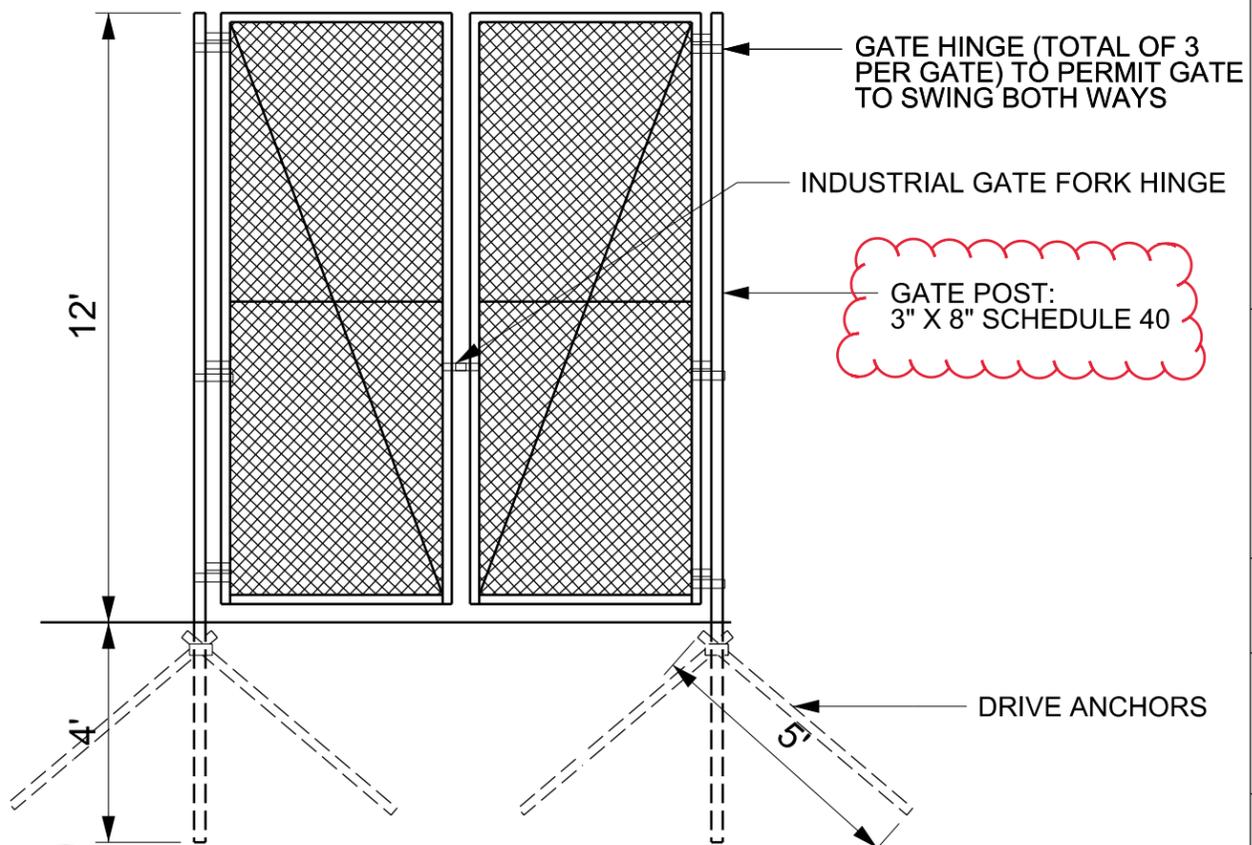

3 10' WIDTH FENCE GATE
NTS

PROJECT:
2019 DOOR
CREEK PARK
TENNIS COURTS
PHASE II

DOOR CREEK PARK
7035 LITTLEMORE DR
MADISON, WI 53718

Although every effort has been made in preparing these plans and checking them for accuracy, the contractor and subcontractors must check all details and dimensions of their trade and be responsible for the same.

ITEM	DATE
ADDENDUM 1	1-29-2019
Advertised for bid:	1-17-2019
Drawn by: KK	10-25-2018

PUBLIC WORKS PROJECT #:
8348

SHEET TITLE:
**FENCING AND NET
DETAILS**

SHEET NUMBER:
1.4