BID OF		
2012		
PROPOSAL, CONTRACT, BOND AND SPECIFICATIONS		
FOR		
UNIVERSITY AVENUE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVENUE/CAMPUS DRIVE/BREESE TERRACE INTERSECTION RECONSTRUCTION		
CONTRACT NO. 6815		
IN		
MADISON, DANE COUNTY, WISCONSIN		
AWARDED BY THE COMMON COUNCIL MADISON, WISCONSIN ON		
PLEASE RETURN PLANS AND SPECIFICATIONS TO:		

CITY ENGINEERING DIVISION 1600 EMIL STREET MADISON, WISCONSIN 53713

www.cityofmadison.com/business/pw

INDEX

SECTION A: ADVERTISEMENT FOR BIDS	A-1
SECTION B: INSTRUCTIONS TO BIDDERS	B-1
SECTION C: SBE	
SECTION D: SPECIAL PROVISIONS	D-1
SECTION E: PROPOSAL	E-1
SECTION F: BID BOND	F-:
SECTION G: AGREEMENT	G-1
SECTION H: PAYMENT AND PERFORMANCE BOND	H-1
SECTION I: PREVAILING WAGE RATE	I-1

This Proposal, and Agreement have been prepared by:

CITY ENGINEERING DIVISION
CITY OF MADISON
MADISON, DANE COUNTY, WISCONSIN

Robert F. Phillips, P.E., City Engineer

SECTION A: ADVERTISEMENT FOR BIDS

REQUEST FOR BID FOR PUBLIC WORKS CONSTRUCTION CITY OF MADISON, WISCONSIN

A BEST VALUE CONTRACTING MUNICIPALITY

CONTRACT NO.	PROJECT NAME:		
6815	UNIVERSITY AVENUE PARKING LOT REC	CONSTRUCTION - 20	12
	AND		
	UNIVERSITY AVENUE/CAMPUS INTERSECTION RECONSTRUCTION	DRIVE/BREESE	TERRACE
SBE GOAL	20%		

Plans and Specifications are available at 1600 Emil Street, Madison, WI 53713; 608-267-1197 or on our website at www.cityofmadison.com/business/pw/contracts/openforBid.cfm.

PREQUALIFICATIONS

Bidders who have not been prequalified by the City Engineer and Affirmative Action Director for the period of **February 1, 2012 to January 31, 2013** must submit their application on or before 1:00 p.m., APRIL 20, 2012, Room 115, City-County Building, Madison, WI 53703. Postmark is not applicable. Contractors be prequalified by the City Engineer including an affirmative action plan approved by the Affirmative Action Director prior to the bid opening or the bid will be rejected. Forms are available at the same location or on our website at www.cityofmadison.com/business/pw/forms.cfm.

PRE-BID MEETING

Representatives of the Affirmative Action Department will be present to discuss the Small Business Enterprise requirements on APRIL 13, 2012 at 1:00 PM at 1600 Emil Street, Madison Wisconsin.

OTHER REQUIREMENTS

Sealed bids must be accompanied with a Bid Bond equal to at least 5% of the bid or a Certificate of Annual/Biennial Bid Bond or certified check, payable to the City Treasurer.

Prevailing Wage Rates may be required and are attached in Section I of the contract. See Special Provisions to determine applicability.

Deadline for the Submittal of Bid is APRIL 20, 2012 by 1:00 PM, at 1600 Emil Street, Madison, WI 53713.

Bid Opening will be on APRIL 27, 2012 at 1:30 PM at 1600 Emil Street, Madison, WI 53713.

REQUEST FOR BIDS FOR PUBLIC WORKS CONSTRUCTION FOR THE CITY OF MADISON, WISCONSIN

A BEST VALUE CONTRACTING MUNICIPALITY

Plans and Specifications for Public Works Projects that are open for bid are available on the City of Madison website at http://www.cityofmadison.com/business/PW/contracts/openforBid.cfm or by calling City Engineering at 608-266-4751.

Sealed bids must be accompanied with a Bid Bond equal to at least 5% of the bid or a Certificate of Annual/Biennial Bid Bond or certified check, payable to the City Treasurer.

Prevailing Wage Rates may be required and are attached in Section I of the contract. See Special Provisions to determine applicability.

Bidders must be prequalified with the City Engineer and the Affirmative Action Director. Deadline date for submittal of application is noticed on our website. Forms are available on the web at http://www.cityofmadison.com/business/pw/forms.cfm or by contacting City Engineering at 608-266-4620

Publ. WSJ APRIL 6 & 13, 2012

SECTION B: INSTRUCTIONS TO BIDDERS

The City of Madison Standard Specifications for Public Works Construction - 2012 Edition, as supplemented and amended from time to time, forms a part of these contract documents as if attached hereto.

These standard specifications are available on the City of Madison Public Works website at www.cityofmadison.com/Business/PW/specs.cfm or by contacting City Engineering Division, Room 115, City-County Building, 210 Martin Luther King Jr. Blvd., Madison, WI 53703.

The Contractor shall review these Specifications prior to preparation of proposals for the work to be done under this contract, with specific attention to Article 102 "BIDDING REQUIREMENTS AND CONDITIONS" and Article 103 "AWARD AND EXECUTION OF THE CONTRACT." For the convenience of the bidder, below are highlights of three subsections of the specifications.

Section 102.1: Pre-Qualification of Bidders

In accordance with Wisconsin State Statutes 66.0901 (2) and (3), all bidders must submit to the Board of Public Works proof of responsibility on forms furnished by the City. The City requires that all bidders be qualified on a biennial basis.

Bidders must present satisfactory evidence that they have been regularly engaged in the type of work specified herein and they are fully prepared with necessary capital, materials, machinery and supervisory personnel to conduct the work to be contracted for to the satisfaction of the City. All bidders must be prequalified by the Board of Public Works for the type of construction on which they are bidding prior to the opening of the bid.

In accordance with Section 39.02(9)(a)l. of the Madison General Ordinances, all bidders shall submit in writing to the Affirmative Action Division Manager of the City of Madison, a Certificate of Compliance or an Affirmative Action Plan at the same time or prior to the submission of the proof of responsibility forms. The bidder shall be disqualified if the bidder fails to or refuses to, prior to opening of the bid, submit a Certificate of compliance, Affirmative Action Plan or Affirmative Action Data Update, as applicable, as defined by Section 39.02 of the Madison General Ordinances (entitled Affirmative Action) and as required by Section 102.11 of the Standard Specifications.

Section 102.4: Proposals

No bid will be accepted that does not contain an adequate or reasonable price for each and every item named in the Schedule of Unit Prices.

A lump sum bid for the work in accordance with the plans and specifications is required. The lump sum bid musts be the same as the total amounts bid for the various items and it shall be inserted in the space provided.

All papers bound with or attached to the proposal form are considered a part thereof and must not be detached or altered when the proposal is submitted. The plans, specifications and other documents designated in the proposal form will be considered a part of the proposal whether attached or not.

A proposal submitted by an individual shall be signed by the bidder or by a duly authorized agent. A proposal submitted by a partnership shall be signed by a member/partner or by a duly authorized agent thereof. A proposal submitted by a corporation shall be signed by an authorized officer or duly authorized registered agent of such corporation, and the proposal shall show the name of the State under the laws of

which such corporation was chartered. The required signatures shall in all cases appear in the space provided therefore on the proposal.

Each proposal shall be placed, together with the proposal guaranty, in a sealed envelope, so marked as to indicate name of project, the contract number or option to which it applies, and the name and address of the Contractor. Proposals will be received at the place and until the hour on the date designated in the advertisement. When sent by mail, the sealed proposal marked as indicated above shall be enclosed in an additional envelope. Proposals sent by mail, submitted in person or otherwise delivered must be in the hands of the official conducting the letting by the hour on the date designated in the advertisement. Proposals received after the date designated will be returned to the bidder unopened.

The Bidder shall execute form ERD-7777 (R.9/03), a part of these proposal pages and submit same with the bidder's proposal, if applicable. REFER TO PROPOSAL SECTION.

Section 102.5: Bid Deposit (Proposal Guaranty)

No proposal shall be considered unless either (i) it is accompanied by a bid deposit of the character and amount described in the Advertisement for Bids or (ii) a biennial bid bond in an amount and form acceptable to the City of Madison has been previously submitted.

Bid deposits of unsuccessful bidders shall be returned following the award of the contract by the Common Council. Bid deposit of the successful bidders shall be returned within forty-eight (48) hours following execution of the contract and bond as required.

Bidders for this Contract(s) must be Pre-Qualified for at least one of the following type(s) of construction denoted by an ⊠

<u>Buil</u>	ding	<u>Demolition</u>			
101		Asbestos Removal	110		Building Demolition
120		House Mover			-
Stre	et,	Utility and Site Construction			
201		Asphalt Paving	265		Retaining Walls, Precast Modular Units
205		Blasting	270		Retaining Walls, Reinforced concrete
210		Boring/Pipe Jacking	275		Sanitary, Storm Sewer & Water Main Const.
215		Concrete Paving	280		Sewer Lateral Drain Cleaning/Internal TV Insp.
220		Con. Sidewalk/Curb & Gutter/Misc. Concrete Work	285		Sewer Lining
221		Concrete Bases and Other Concrete Work	290		Sewer Pipe Bursting
225		Dredging	295		Soil Borings
230		Fencing	300		Soil Nailing
235		Fiber Optic Cable/Conduit Installation	305		Storm & Sanitary Sewer Laterals & Water Svc.
240		Grading and Earthwork	310	\boxtimes	Street Construction
242		Infrared Seamless Patching	315		Street Lighting
245		Landscaping, Maintenance	318		Tennis Court Resurfacing
250		Landscaping, Site and Street	330		Traffic Control During Construction
251		Parking Ramp Maintenance	320		Traffic Signals
255		Pavement Sealcoating and Crack Sealing	325		Traffic Signing & Marking
260		Petroleum Above/Below Ground Storage Tank	335		Trucking
		Removal/Installation	399		Other
Brid	lae (<u>Construction</u>			
501		Bridge Construction and/or Repair			
	_	Enage Constitution and Tropan			
Buil	dinc	Construction			
401		Floor Covering (including carpet, ceramic tile installation,	435		Masonry
	_	rubber, VCT	437		Metals
402		Building Automation Systems	440		Painting and Wallcovering
403		Concrete	445		Plumbing
404		Doors and Windows	450		Pump Repair
405		Electrical - Power, Lighting & Communications	455		Pump Systems
410		Elevator - Lifts	460		Roofing and Moisture Protection
412		Fire Suppression	461		Solar Photovoltaic/Hot Water Systems
413		Furnishings - Furniture and Window Treatments	465		Soil/Groundwater Remediation
415		General Building Construction, Equal or Less than \$250,000	466		Warning Sirens
420		General Building Construction, \$250,000 to \$1,500,000	470		Water Supply Elevated Tanks
425		General Building Construction, Over \$1,500,000	475		Water Supply Wells
		Glass and/or Glazing	480		Wood, Plastics & Composites-Structural &
428 429		Hazardous Material Removal	400	LJ	Architectural
			499		Other
430 433	_	Heating, Ventilating and Air Conditioning (HVAC) Insulation - Thermal	733	П	Othor
400	Ш	moulation - Indimat			

<u>Stat</u>	e of	Wisconsin Certifications
1		Class 5 Blaster - Blasting Operations and Activities 2500 feet and closer to inhabited buildings for quarries, open pits and road cuts.
2		Class 6 Blaster - Blasting Operations and Activities 2500 feet and closer to inhabited buildings for trenches, site excavations, basements, underwater demolition, underground excavations, or structures 15 feet or less in height.
3		Class 7 Blaster - Blasting Operations and Activities for structures greater than 15 ' in height, bridges, towers, and any of the objects or purposes listed as "Class 5 Blaster or Class 6 Blaster".
4		Petroleum Above/Below Ground Storage Tank Removal and Installation (Attach copies of State Certifications.)
5		Hazardous Material Removal (Contractor to be certified for asbestos and lead abatement per the Wisconsin Department of Health Services, Asbestos and Lead Section (A&LS).) See the following link for application: http://www.dhs.wisconsin.gov/Asbestos/Cert/Index.htm . State of Wisconsin Performance of Asbestos Abatement Certificate must be attached.
6	П	Other

4

SECTION C: SBE

Instructions to Bidders City of Madison SBE Program Information

2 Small Business Enterprise (SBE) Program Information

2.1 Policy and Goal

The City of Madison reaffirms its policy of nondiscrimination in the conduct of City business by maintaining a procurement process which remains open to all who have the potential and ability to sell goods and services to the City. It is the policy of the City of Madison to allow Small Business Enterprises (SBE) maximum feasible opportunity to participate in City of Madison contracting. The bidder acknowledges that its bid has been submitted in accordance with the SBE program and is for the public's protection and welfare.

Please refer to the "ADVERTISEMENT FOR BIDS" for the goal for the utilization of SBEs on this project. SBEs may participate as subcontractors, vendors and/or suppliers, which provide a commercially useful function. The dollar value for SBE suppliers or 'materials only' vendors shall be discounted to 60% for purposes of meeting SBE goals.

A bidder which achieves or exceeds the SBE goal will be in compliance with the SBE requirements of this project. In the event that the bidder is unable to achieve the SBE goal, the bidder must demonstrate that a good faith effort to do so was made. Failure to either achieve the goal or demonstrate a good faith effort to do so will be grounds for the bidder being deemed a non-responsible contractor ineligible for award of this contract.

A bidder may count towards its attainment of the SBE goal only those expenditures to SBEs that perform a commer—cially useful function. For purposes of evaluating a bidder's responsiveness to the attainment of the SBE goal, the contract participation by an SBE is based on the percentage of the total base bid proposed by the Contractor. The total base bid price is inclusive of all addenda.

Work performed by an SBE firm in a particular transaction can be counted toward the goal only if it involves a commercially useful function. That is, in light of industry practices and other relevant considerations, does the SBE firm have a necessary and useful role in the transaction, of a kind for which there is a market outside the context of the SBE Program, or is the firm's role a superfluous step added in an attempt to obtain credit towards goals? If, in the judgment of the Affirmative Action Division, the SBE firm will not perform a commercially useful function in the transaction, no credit towards goals will be awarded.

The question of whether a firm is performing a commercially useful function is completely separate from the question of whether the firm is an eligible SBE. A firm is eligible if it meets the definitional criteria and ownership and control requirements, as set forth in the City of Madison's SBE Program.

If the City of Madison determines that the SBE firm is performing a commercially useful function, then the City of Madison must then decide what that function is. If the commercially useful function is that of an SBE vendor / supplier that regularly transacts

business with the respective product, then the City of Madison will count 60% of the value of the product supplied toward SBE goals.

To be counted, the SBE vendor / supplier must be engaged in selling the product in question to the public. This is important in distinguishing an SBE vendor / supplier, which has a regular trade with a variety of customers, from a firm which performs supplier-like functions on an <u>ad hoc</u> basis or for only one or two contractors with whom it has a special relationship.

A supplier of bulk goods may qualify as an eligible SBE vendor / supplier if it either maintains an inventory or owns or operates distribution equipment. With respect to the distribution equipment; e.g., a fleet of trucks, the term "operates" is intended to cover a situation in which the supplier leases the equipment on a regular basis for its entire business. It is not intended to cover a situation in which the firm simply provides drivers for trucks owned or leased by another party; e.g., a prime contractor, or leases such a party's trucks on an ad hoc basis for a specific job.

If the commercially useful function being performed is not that of a qualified SBE vendor / supplier, but rather that of delivery of products, obtaining bonding or insurance, procurement of personnel, acting as a broker or manufacturer's representative in the procurement of supplies, facilities, or materials, etc., only the fees or commissions will apply towards the goal.

For example, a business that simply transfers title of a product from manufacturer to ultimate purchaser; e. g., a sales representative who re-invoices a steel product from the steel company to the Contractor, or a firm that puts a product into a container for delivery would not be considered a qualified SBE vendor / supplier. The Contractor would not receive credit based on a percentage of the cost of the product for working with such firms.

Concerning the use of services that help the Contractor obtain needed supplies, personnel, materials or equipment to perform a contract: only the fee received by the service provider will be counted toward the goal. For example, use of a SBE sales representative or distributor for a steel company, if performing a commercially useful function at all, would entitle the Contractor receiving the steel to count only the fee paid to the representative or distributor toward the goal. This provision would also govern fees for professional and other services obtained expressly and solely to perform work relating to a specific contract.

Concerning transportation or delivery services: if an SBE trucking company picks up a product from a manufacturer or a qualified vendor / supplier and delivers the product to the Contractor, the commercially useful function it is performing is not that of a supplier, but simply that of a transporter of goods. Unless the trucking company is itself the manufacturer or a qualified vendor / supplier in the product, credit cannot be given based on a percentage of the cost of the product. Rather, credit would be allowed for the cost of the transportation service.

The City is aware that the rule's language does not explicitly mention every kind of business that may contribute work on this project. In administering these programs, the City would, on a case-by-case basis, determine the appropriate counting formula to apply in a particular situation.

2.2 Contract Compliance

Questions concerning the SBE Program shall be directed to the Contract Compliance Officer of the City of Madison Department of Civil Rights, Affirmative Action Division, 210 Martin Luther King, Jr. Blvd., Room 523, Madison, WI 53703; telephone (608) 266-4910.

2.3 Certification of SBE by City of Madison

The Affirmative Action Division maintains a directory of SBEs which are currently certified as such by the City of Madison. Contact the Contract Compliance Officer as indicated in Section 2.2 to receive a copy of the SBE Directory or you may access the SBE Directory online at www.cityofmadison.com/dcr/aaTBDir.cfm.

All contractors, subcontractors, vendors and suppliers seeking SBE status must complete and submit the Targeted Business Certification Application to the City of Madison Affirmative Action Division by the time and date established for receipt of bids. A copy of the Targeted Business Certification Application is available by contacting the Contract Compliance Officer at the address and telephone indicated in Section 2.2 or you may Certification Application online access the Targeted Business Submittal of the Targeted Business www.cityofmadison.com/dcr/aaTBDir.cfm. Certification Application by the time specified does not guarantee that the applicant will be certified as a SBE eligible to be utilized towards meeting the SBE goal for this project.

2.4 Small Business Enterprise Compliance Report

2.4.1 Good Faith Efforts

Bidders shall take all necessary affirmative steps to assure that SBEs are utilized when possible and that the established SBE goal for this project is achieved. A contractor who self performs a portion of the work, and is pre-qualified to perform that category of work, may subcontract that portion of the work, but shall not be required to do so. When a bidder is unable to achieve the established SBE goal, the bidder must demonstrate that a good faith effort to do so was made. Such a good faith effort should include the following:

- 2.4.1.1 Attendance at the pre-bid meeting.
- 2.4.1.2 Using the City of Madison's directory of certified SBEs to identify SBEs from which to solicit bids.
- 2.4.1.3 Assuring that SBEs are solicited whenever they are potential sources.
- 2.4.1.4 Referring prospective SBEs to the City of Madison Affirmative Action Division for certification.
- 2.4.1.5 Dividing total project requirements into smaller tasks and/or quantities, where economically feasible, to permit maximum feasible SBE participation.
- 2.4.1.6 Establishing delivery schedules, where requirements permit, which will encourage participation by SBEs.
- 2.4.1.7 Providing SBEs with specific information regarding the work to be performed.
- 2.4.1.8 Contacting SBEs in advance of the deadline to allow such businesses sufficient time to prepare a bid.
- 2.4.1.9 Utilizing the bid of a qualified and competent SBE when the bid of such a business is deemed reasonable (i.e. 5% above the lowest bidder), although not necessarily low.

2.4.1.10 Contacting SBEs which submit a bid, to inquire about the details of the bid and confirm that the scope of the work was interpreted as intended.

2.4.2 Reporting SBE Utilization and Good Faith Efforts

The Small Business Enterprise Compliance Report is to be submitted by the bidder in a separate sealed envelope marked: "ENVELOPE 2 - SBE COMPLIANCE REPORT." This report is due by the specified bid closing time and date. Bids submitted without a completed SBE Compliance Report as outlined below shall be deemed non-responsible and the bidder ineligible for award of this contract.

- 2.4.2.1 If the Bidder <u>meets or exceeds</u> the goal established for SBE utilization, the Small Business Enterprise Compliance Report shall consist of the following:
 - 2.4.2.1.1 Cover Page, Page C-7; and
 - 2.4.2.1.2 **Summary Sheet,** C-8.
- 2.4.2.2 If the bidder <u>does not meet</u> the goal established for SBE utilization, the Small Business Enterprise Compliance Report shall consist of the following:
 - 2.4.2.2.1 **Cover Page, Page C-7**;
 - 2.4.2.2.2 **Summary Sheet,** C-8; and
 - 2.4.2.2.3 **SBE Contact Report,** C-9 and C-10. (A <u>separate</u> Contact Report must be completed for <u>each applicable</u> SBE which is <u>not</u> utilized.)

2.5 Appeal Procedure

A bidder which does not achieve the established goal and is deemed <u>non-responsible</u> for failure to demonstrate a good faith effort to achieve such goal and subsequently denied eligibility for award of contract may, within 72 hours of receiving such notification, appeal that decision to a special appeals committee composed of three (3) members of the Affirmative Action Commission, three (3) members of the Board of Public Works and a seventh member appointed by the Mayor. All appeals must be made in writing to the City Engineer and <u>received</u> within 72 hours of City of Madison's notice. Postmark not applicable.

2.6 SBE Requirements After Award of the Contract

The successful bidder shall identify SBE subcontractors, suppliers and vendors on the subcontractor list in accordance with the specifications. The Contractor shall submit a detailed explanation of any variances between the listing of SBE subcontractors, vendors and/or suppliers on the subcontractor list and the Contractor's SBE Compliance Report for SBE participation.

No change in SBE subcontractors, vendors and/or suppliers from those SBEs indicated in the SBE Compliance Report will be allowed without prior approval from the Engineer and the Affirmative Action Division. The contractor shall submit in writing to the City of Madison Affirmative Action Division a request to change any SBE citing specific reasons which necessitate such a change. The Affirmative Action Division will use a general test

of reasonableness in approving or rejecting the contractor's request for change. If the request is approved, the Contractor will make every effort to utilize another SBE if available.

The City will monitor the project to ensure that the actual percentage commitment to SBE firms is carried out.

2.7 SBE Definition and Eligibility Guidelines

A Small Business Enterprise is a business concern awarded certification by the City of Madison. For the purposes of this program a Small Business Enterprise is defined as:

- A. An independent business operated under a single management. The business may not be a subsidiary of any other business and the stock or ownership may not be held by any individual or any business operating in the same or a similar field. In determining whether an entity qualifies as a SBE, the City shall consider all factors relevant to being an independent business including, but not limited to, the date the business was established, adequacy of its resources for the work in which it proposes to involve itself, the degree to which financial, equipment leasing and other relationships exist with other ineligible firms in the same or similar lines of work. SBE owner(s) shall enjoy the customary incidents of ownership and shall share in the risks and profits commensurate with their enjoyment interests, as demonstrated by an examination of the substance rather than form or arrangements that may be reflected in its ownership documents.
- B. A business with annual gross receipts of less than \$750,000 when averaged over the past three year period;

Firm and/or individuals that submit fraudulent documents/testimony may be barred from doing business with the City and/or forfeit existing contracts.

SBE certification is valid for one (1) year unless revoked.

Small Business Enterprise Compliance Report

Cover Sheet

This information MUST be submitted in a separate sealed envelope marked "ENVELOPE NO. 2 - SBE COMPLIANCE REPORT."

Prime Bidder Information:	
Company:	
Address:	
Telephone Number:	Fax Number:
Contact Person/Title:	
Prime Bidder Certification:	
I,	,of
Name	Title
	certify that the information
Company	
contained in this SBE Compliance Report is true and co	rrect to the best of my knowledge and belief.
Witness' Signature	Bidder's Signature
Date	

Small Business Enterprise Compliance Report

Summary Sheet

This information MUST be submitted in a separate sealed envelope marked "ENVELOPE NO. 2 - SBE COMPLIANCE REPORT."

SBE SUBCONTRACTORS WHO ARE NOT SUPPLIERS

Name(s) of SBEs Utilized	Type of Work	% of Total Bid Amount
Subtotal SBE who are not suppliers:		%
SBE SUBCONTRACTORS WHO ARE S	SUPPLIERS	
Name(s) of SBEs Utilized	Type of Work	% of Total Bid Amount
Subtotal Contractors who are suppliers:	% x 0.6 =	% (discounted to 60%)
Total Percentage of SBE Utilization:	<u>%</u> .	

Small Business Enterprise Compliance Report

SBE Contact Report

This information MUST be submitted in a separate sealed envelope marked "ENVELOPE NO. 2 - SBE COMPLIANCE REPORT."

Submit <u>separate</u> copy of this form for <u>each</u> SBE which you are not able to utilize towards meeting the SBE goal for this project. Attach separate sheets if necessary.

<u>SBE</u>	Information:
Com	pany:
Addr	ess:
Telep	phone Number:
Conta	act Person/Title:
1.	Outline below all efforts to solicit a bid from the above SBE. Include date, means of contact, who from your company made this contact and the result.
2.	Describe the information provided to the aforementioned SBE regarding the scope of work for which he/she was to provide a bid.
	Is this the same scope of work on which the subcontractor you intend to utilize based his/her bid?
	☐ Yes ☐ No
3.	Did this SBE submit a bid?
4	Is the General Contractor pre-qualified to self-perform this category of work?

		es No
5.		a responded "Yes" to Question 3, please check the items below which apply and provide the ested detail. If you responded "No" to Question 3, please skip ahead to item 6 below.
		The SBE listed above is unavailable for work on this project for the following reasons. Provide specific detail for this conclusion.
		The SBE listed above is unqualified for work on this project. Provide specific details for this conclusion.
		The SBE listed above provided a price that was unreasonable (i.e. more than 5% above the lowest bidder). Provide specific detail for this conclusion including the SBE's price and the price of the subcontractor you intend to utilize.
		A contract with the SBE listed above may constitute a breach of the bidder's collective bargaining agreements. Provide specific detail for this conclusion including, but not limited to, correspondence from the SBE indicating it will not sign a project labor agreement and/or correspondence from the applicable trade union indicating a project labor agreement will not be allowed at the time of project bidding.
		Other; please specify reason(s) other than listed above which made it impossible for you to utilize this SBE on this project.
6.	Descr	ribe any other good faith efforts:

SECTION D: SPECIAL PROVISIONS

UNIVERSITY AVENUE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVENUE/CAMPUS DRIVE/BREESE TERRACE INTERSECTION RECONSTRUCTION CONTRACT NO. 6815

It is the intent of these Special Provisions to set forth the final contractual intent as to the matter involved and shall prevail over the Standard Specifications and plans whenever in conflict therewith. In order that comparisons between the Special Provisions can be readily made, the numbering system for the Special Provisions is equivalent to that of the Specifications.

Whenever in these Specifications the term "Standard Specifications" appears, it shall be taken to refer to the City of Madison Standard Specifications for Public Works Construction and Supplements thereto.

SECTION 102.10: MINIMUM RATE OF WAGE SCALE

For this project, payment of prevailing wages (white sheet) is not required if either: a single trade accounts for 85% or more of the total labor costs of the project and the bid is less than \$48,000; or no single trade accounts for 85% or more of the total labor costs of the project and the bid is less than \$100,000. For bids not meeting either of these conditions, prevailing wages shall be required.

If required, the wages and benefits paid on the contract shall not be less than those specified in the Prevailing Wage Determination included with these contract documents for the following types of work:

Building and Heavy Construction
Sewer, Water, and Tunnel Construction
Local Street and Miscellaneous Paving Operations
Residential and Agricultural Construction

All bidders are notified that all labor employed on City contracts must be paid in accordance with the minimum rate of wage scale included in the Contract Documents.

For the information of the employees working on the project, a copy of the wage scale included in the contract documents and the provisions of Section 66.0903(8) of the Wisconsin Statutes shall be kept posted by the employer and in at least one conspicuous and easily accessible place at the site of the project.

The Contractor shall keep weekly payroll records setting forth the name, address, telephone number, classification, wage rate and fringe benefit package of each employee who worked on such City project and all other projects the employee worked in the same period, and the Contractor must keep records of the individual time each employee worked on the project and for each day of the project. Such records shall also set forth the total number of hours of overtime credited to each such employee for each day and week and the amount of overtime pay received in that week. Such records shall, in addition, set forth the full weekly wages earned by each such employee and the actual hourly wage paid to that employee. The Contractor shall submit payroll records to the Engineer every week for those periods when work is being done on the project. Said submittal shall be within twenty-one (21) calendar days of the end of the Contractor's weekly pay period.

The Contractor shall ensure that employees shall be paid unconditionally and shall receive the full amounts accrued at the time of payment, computed at rates not less than those stated in the City of

Madison "Minimum Rate of Wage Scale" and that each employee's rate shall be determined by the work that is done within the trade or occupation classification which should be properly assigned to such employee. Questions regarding an employee's classification or rate of pay within that classification, shall be resolved by the practice that predominates in the industry and on which the trade or occupation rate/classification is based. Therefore, rate of pay, classification and work jurisdiction disputes shall be resolved by relying upon practices established by collective bargaining agreements and guidelines used in such determinations by appropriate recognized trade unions operating within the City of Madison.

The Contractor shall agree that the normal rate of wage paid to the Contractor's employees on other projects shall not be reduced or otherwise diminished as a result of the requirement to pay no less than the minimum rate of wage scale on a City project. Mulcting of employees on City projects by contractors, such as by kickbacks or other such devices, is prohibited.

These contract provisions shall apply to all work performed on the contract by the Contractor with its own organization and with assistance of laborers under its immediate superintendency and to all work performed by piecework or by subcontract. No laborer, worker, or mechanic shall be employed directly upon the site of the work except on a wage basis, but this shall not be construed to prohibit the rental of equipment from individuals.

In the event of a refusal by the Contractor to submit payroll records as required by the contract, the City of Madison shall have the option to cancel this contract and request the Surety to perform or to relet the balance of the work for bids, and in that event, to charge the Contractor for any loss which the City may incur thereby.

SECTION 102.12: BEST VALUE CONTRACTING

This Contract shall be considered a Best Value Contract if the Contractor's bid is equal to or greater than \$51,500 for a single trade contract; or equal to or greater than \$251,000 for a multi-trade contract pursuant to MGO 33.07(7).

ARTICLE 103 - AWARD AND EXECUTION OF THE CONTRACT

The Contractor shall execute signing of this contract completely prior to <u>MAY 21, 2012</u>. No exceptions or extensions to the above date will be permitted.

ARTICLE 104 - SCOPE OF WORK

The project limits for the work to be done include the University Avenue parking lot located in the 2500 block of University Avenue and two areas on University Avenue which require the installation of the final surface layer of pavement. The two areas of University Avenue which require final surface pavement are: 1) approximately 530 lineal feet in the 2500 block of University Avenue and Stage 2) approximately 430 lineal feet in the 1500 block of University Avenue. The project is approximately 800 feet in length.

For purposes of this Contract the work shall divided in two stages for construction. Stage 1 work includes the work associated with the reconstruction of the University Avenue parking lot and the placement of the final surface pavement layer on University Avenue in the 2500 block of University Avenue. Stage 2 work includes the work associated with milling and overlaying the final surface pavement layer at the University Avenue, Campus Drive and Breese Terrace intersection.

The Contractor shall coordinate their work with the two ongoing private development projects located within the project limits. See Section 105.12 - Cooperation By The Contractor.

The work under this contract shall include but not be limited to installation of storm sewer, street lighting, curb and gutter, drive aprons, base preparation, asphalt pavement, topsoil placement and seeding and sidewalk repair.

The Contractor shall view the site prior to bidding to become familiar with the existing conditions. It will be the responsibility of the Contractor to work with the utilities located in the right of way to resolve conflicts during the construction process.

SECTION 104.6 <u>DECREASED AND DELETED ITEMS</u>

The electrical quantities include estimates for work that may or may not be required. If actual quantities are less than estimated, or if items are deleted from the contractor's work, the decreased quantities or deleted items shall not constitute the basis for a claim for damages for anticipated profits for the work dispensed with.

SECTION 105.1: AUTHORITY OF THE ENGINEER

The Engineer shall resolve all questions which arise as to the quality and acceptability of materials furnished, work performed, manner of performance, rate of progress of the work, interpretation of the plans and Specifications, acceptable fulfillment of the contract, compensation, and disputes and mutual rights between Contractors under the Specifications. The Engineer shall determine the amount and quantity of work performed and materials furnished.

All decisions of the Engineer shall, when so requested, be rendered in writing. They shall be final and conclusive in all matters unless within ten (10) days after such decision the Contractor applies in writing to the Board of Public Works for a review of such decision.

Any change proposed by a Contractor in SBE subcontractors, vendors or suppliers from those SBEs indicated on the SBE Compliance Report must be approved by the Engineer and the City's Manager of the Affirmative Action Division (hereafter, AAD). When requested, such decision shall be rendered in writing. Such decisions shall be final and conclusive in all matters unless within ten (10) days after such decision the Contractor or the affected SBE applies in writing to the Board of Public Works for a review of such decision.

In the event the Engineer and the AAD disagree over the proper decision to be made regarding an SBE, the Mayor shall appoint a third person to resolve the disagreement, within 30 days of appointment. The decision thus rendered may be reviewed by the Board of Public Works upon request of the Contractor or the affected SBE as set forth in Sections 105.1 and 105.2 of the City's standard specifications.

SECTION 105.12 <u>COOPERATION BY THE CONTRACTOR</u>

The City of Madison has been given to understand that work will be undertaken by others in approximately the same time frame and the same area as the proposed project. It shall be the Contractor's responsibility to verify this information and any subsequent changes in the scheduling of the work by others and to make corrections in his/her construction timetable as required.

The Contractor shall coordinate all Stage 1 work in the 2500 block of University Avenue with ongoing work by others for the private Development of the property at 2550 University Avenue. The Developer's contact for coordination purposes is Jay Mullins, (608-285-8090 office) and (608-212-5965 cell).

The Contractor shall coordinate all Stage 2 work in the 1500 block of University Avenue with ongoing work by others for the private Development of the property at 1552 University Avenue. The Developer's contact for coordination purposes is Brad King of Mortenson Construction, at (262) 853-6458.

The Contractor shall use care around existing trees, plantings, fences, walls, steps and driveways that are indicated on the plans to remain. Damage to these items during construction shall be repaired or replaced at the Contractor's expense. No trees shall be cut without the approval of the Engineer and the City Forester; the abutting property owners shall be notified in accordance with the City's Administrative Procedure Memorandum No. 6-2.

SECTION 107.7 MAINTENANCE OF TRAFFIC

The Contractor shall submit an acceptable Traffic Control Plan, including all necessary phases, to the office of the City Traffic Engineer, at 215 Martin Luther King, Jr. Blvd, Suite 100, Madison, WI 53703, a minimum of five (5) working days prior to the pre-construction meeting. The Traffic Control Plan shall address all requirements of this section of the Special Provisions. The successful bidder shall work with the City Traffic Engineering Division to develop an approved Traffic Control Plan. The Contractor shall not start work on this project until the Traffic Engineering Division has approved a traffic control plan and traffic control devices have been installed, in accordance with the approved plan. Failure of the Contractor to obtain approval of a Traffic Control Plan, as specified above, may prevent the Contractor from starting work and shall be considered a delay of the project, caused by the Contractor.

The Contractor shall be responsible for installing and maintaining traffic control in accordance with the approved Traffic Control Plan and as directed by the City Traffic Engineer. The traffic control plan may need to be altered as conditions change in the field or as unexpected conditions occur. This may include relocating existing traffic control or providing additional traffic control. The Contractor shall install and maintain any necessary modifications or additions to the traffic control, as directed by the City Traffic Engineer, at no cost to the City.

All signing and barricading shall conform to the Federal Highways Administrations "Manual on Uniform Traffic Control Devices" (MUTCD).

One lane of traffic shall be maintained in each direction at all times on University Avenue. Minimum traffic lane width is 10 feet to edge of pavement and 12 feet from face of curb.

All traffic lanes shall be open during peak traffic times (7:00am-8:30am and 4:00-5:30pm).

Left turns from westbound University Avenue to southbound Breese Terrace shall be maintained at all times with a minimum turning radius that can accommodate Madison Metro buses.

Right turns from northbound Breese Terrace to eastbound University Avenue shall be maintained at all times with a minimum turning radius that can accommodate Madison Metro buses.

Type A warning lights shall be installed on all barricades used in the project per State of Wisconsin S.D.D. 15C2-4B. Contractor shall also place Type C warning lights on any barrels used to taper traffic or lane closures.

Maintain pedestrian movements crossing the construction zone at all intersections at all times. Pedestrian crossings of intersections shall meet requirements of the Americans with Disabilities Act Accessibility Guidelines (ADAAG) and shall consist of temporary asphaltic surface, any grade of concrete, skid resistant steel plating, or alternative material as approved by the Construction Engineer. Gravel or base course material is not acceptable. Maintain ADA accessible pedestrian walkways that are free from mud,

sand, and construction debris. Any closures of sidewalk shall be approved by the Construction Engineer and shall conform to City of Madison standard detail drawing 6.36 in addition to any signing shown on the traffic control plan.

No construction equipment or materials shall be stored in the roadway or street right-of-way that is open to traffic during non-working hours. Construction equipment and materials are not to be stored within the street right-of-way that is outside the project limits as shown on the approved plan.

The Contractor shall not remove or cover any traffic signs. For removal, replacement, or covering of traffic and parking signs, contact the City of Madison Traffic Engineering Field Operations, 1120 Sayle Street, 266-4767, 8:00 a.m. to 4:00 p.m., a minimum of 2 working days in advance of when any existing signs need to be removed or covered. This service is free of charge. If the Contractor removes or covers the signs, the Contractor will be billed for the reinstallation or repair of, and any damage to, the signing equipment.

Contact Thomas Mohr, Traffic Engineering Division, 267-8725, with any questions concerning these traffic control specifications.

SECTION 107.8 NOTIFICATION WHEN CLOSING STREET

The Contractor shall not remove traffic signs. For removal or replacement of traffic and parking signs, contact the City of Madison Traffic Engineering Field Operations, 1120 Sayle Street, 266-4767, 8:00 a.m. to 4:00 p.m., a minimum of twenty-four (24) hours in advance of when any existing signs need to be removed. This service is provided free of charge. If the Contractor removes the signs, the Contractor will be billed for the reinstallation of, and any damage to, the signing equipment.

SECTION 108.2 PERMITS

A WI DNR Water Resources Application for Projects Permits (WRAPP) for construction site erosion control is not required for this project as the disturbed area is less than one (1) acre. A City of Madison Erosion Control permit is required and weekly inspections shall be completed by City Staff.

The Contractor shall meet the conditions of the City permit by properly installing and maintaining the erosion control measures as shown on the plans, specified in these Special Provisions, or as directed by the Construction Engineer or his designees. This work will be paid for under the appropriate contract bid items.

SECTION 109.2 PROSECUTION OF WORK

The Contractor shall begin work on or before MAY 31, 2012. The total time of completion of the contract shall be FOURTY (44) calendar days.

Stage 1 Work included within the 2500 block of University Avenue shall be limited to beginning on or before MAY 31, 2012. The date of completion for work within the 2500 block of University Avenue shall be JUNE 29, 2012.

Stage 2 Work at the intersection of University Avenue, Campus Drive and Breese Terrace shall be limited to beginning only after the widening of University Avenue has been completed by others along the north curb line of the property at 1552 University Avenue. The Developer estimates that the work in University Avenue will be able to commence by August, 2012. Work at the intersection of University Avenue, Campus Drive and Breese Terrace shall be limited to **FOURTEEN (14) CONSECUTIVE CALENDAR DAYS.** No work in this intersection shall be done on home UW football Saturdays (9/1/12, 9/15/12). Final paving of the Stage 2 Work shall be accomplished on a Saturday to limit exposure of paving operations to heavy weekday Metro Transit bus routes.

Work shall begin only after the start work letter is received. The Contractor shall limit workdays to 7:00 a.m. to 7:00 p.m. unless approved by the Engineer in writing.

BID ITEM 20321 - CONCRETE PAVEMENT REMOVAL

An estimated quantity of concrete pavement removal has been included in the proposal for the anticipated removal of concrete pavement utility trench patches at the intersection of University Avenue and Breese terrace.

ARTICLE 401 CRUSHED AGGREGATE BASE COURSE

The clear stone base course and the crushed stone base course shall be placed on the same day as the existing stone base is removed.

The Contractor shall maintain a minimum of six (6") inches of stone base course (existing or new) on all portions of the roadway open to vehicle access. No additional compensation will be given for stone used to maintain the six (6") required for access.

Crushed stone base course shall be used for bringing temporary ramps to grade. This material shall be reused after ramp is removed.

The material commonly known as crusher run or breaker run shall be used in undercut areas as designated by the Engineer.

SECTION 500 SEWERS AND SEWER STRUCTURES

STORM SEWER GENERAL

The storm sewer designer for this project is Sally Swenson: (608) 266-4862, sswenson@cityofmadison.com

Reconnection of existing pipes at new structures, or new pipes at new structures shall be considered to be part of the work required to construct the new structure or to construct the new sewer pipe and shall not be rewarded with additional compensation. However, if the structure being removed is larger than the

new structure, thus requiring additional pipe, the new pipe shall be paid under the appropriate bid item and the connection of the old pipe shall be accomplished with a concrete collar.

Where a new structure is to be constructed at an existing pipe, it is expected that the Contractor shall saw cut the existing pipe in the required location to accommodate the placement of the new structure. This shall be considered incidental to the structure. If the Contractor, of his or her convenience, deems it more suitable to remove the existing pipe to a full joint, the additional pipe and concrete collar required to reconnect the new structure shall be the responsibility of the Contractor and shall not be compensated.

SECTION 602.4(b) ELECTRICAL CONDUIT

Item 60241, Gopher Raceway, shall include any and all work associated with determining locations of existing utilities, such as underground locates. Item 60241 shall include raceways created by pushing, gophering or boring. The measured quantity will only include distances installed directly underneath curb and gutter, roadway, and sidewalk sections that are not removed or constructed with this project, or designated borings past trees. Minor alterations in conduit location may be made by the City Traffic Engineering Electrical Inspector to avoid gopher installation. Conduit depth within five feet of entering or leaving any handhole shall be 40 inches.

BID ITEM 90001 - MECHANICALLY STABILIZED EARTH MODULAR BLOCK WALL

DESCRIPTION

The work under this item shall consist of designing, furnishing materials and erecting a Permanent Earth Retention System in accordance with the lines, dimension, elevations and details as shown on the plans and provided in the contract. The quantity of BID ITEM 90001 - MECHANICALLY STABILIZED EARTH MODULAR BLOCK WALL includes 910 S.F. for the retaining wall as shown in the plan. The design life of the wall and all wall components shall be 75 years. Within this Special Provision, "WisDOT" refers to the Wisconsin Department of Transportation and "WisDOT Special Provisions" refers to the State of Wisconsin Standard Specifications for Highway and Structure Construction, 20012 Edition.

PROPRIETARY MODULAR BLOCK WALL SYSTEMS

Proprietary wall systems may be used for this work, but must conform to the requirements of this specification. The Mechanically Stabilized Earth Modular Block Wall shall be one of the following preapproved proprietary wall systems hereinafter specified:

- (1) Keystone Retaining Wall Systems
 Supplied By: Best Block Company
 W140 N5870 Lilly Road
 Menomonee Falls, WI 53051
 1-414-781-7200
- (2) Rockwood Retaining Wall Systems
 Supplied By: Rockwood Retaining Walls
 W6558 Hwy. 33
 Juneau, WI 53039
 1-800-248-7456

- (3) Rockwood Retaining Wall Systems
 Supplied By: Rockwood Retaining Walls
 7200 N. Hwy. 63
 Rochester, MN 55906
 1-800-535-2375
- (4) Versa-Lok Supplied By: Willow Creek Concrete Products 12626 County Road 150 Kimball, MN. 55353 1-800-770-4525

DESIGN REQUIREMENTS

It is the responsibility of the Contractor to supply a design and supporting documentation as required by this special provision for review by the City of Madison to show the proposed design for each wall is in compliance with the design specifications.

The Design/Shop plans shall be prepared on reproducible sheets 11 inch x 17 inch, including borders. Each sheet shall have a title block in the lower right corner. The title block shall include the project identification number and structure number. Design calculations and notes shall be on $8\ 1/2$ inch x 11 inch sheets, and shall contain the project identification number, name or designation of the wall, date of preparation, initials of designer and checker, and page number at the top of the page. All plans and calculations shall be signed, sealed and dated by a professional Engineer licensed in the State of Wisconsin.

The design of the Mechanically Stabilized Earth Modular Block Wall shall consider the internal stability of the wall mass, including the reinforcement pullout resistance. The design shall be in compliance with the current AASHTO Standard Specifications for Highway Bridges including interim specifications, the Wisconsin Standard Specifications for Highway and Structure Construction and standard engineering design procedures as determined by WisDOT. The walls shall be designed for the heights shown on the plans and 100% of the soil reinforcement shall be connected to the wall facing.

The embedment to the top of the leveling pad shall be 1 foot 6 inches or as specified in the plan whichever is greater. Potential depth of frost penetration at the wall location shall not be considered in designing the wall for depth of leveling pad. Vertical earth pressure shall be determined using Meyerhof distribution. A connection factor of safety of 1.5 at 0.75 inch deformation is required. A geosynthetic waterproof membrane is not required to cover the reinforced mass.

The minimum length of soil reinforcement measured from the back face of the wall shall be equal to 0.7 the wall height or as shown on the plan. In no case shall this length be less than 6 feet. The soil reinforcement shall extend 3 feet beyond the theoretical failure plane in all cases. The maximum vertical spacing of soil reinforcement layers shall be two times the block depth (front face to back face) or 32 inches, whichever is less. The first (bottom) layer of reinforcement shall be placed no further than 12 inches (average) above the top of the leveling pad but at least one block height above the leveling pad. The last (top) layer of soil reinforcement shall be no further than 24 inches (average) below the top of the wall.

The Contractor shall submit four copies of the following to the Engineer for review: complete design calculations, explanatory notes, specifications, detailed plans and shop drawings for the proposed wall system. They shall be submitted no later than 21 days prior to beginning construction of the wall. The detailed plans and shop drawings shall include all details, dimensions, quantities and cross-sections necessary

to construct the walls. The design calculations and notes shall clearly indicate the factors of safety against pullout and the design soil pressure beneath the wall footing and retained earth mass.

MATERIALS

Materials furnished under this contract shall conform to the following requirements.

Leveling Pad: The wall leveling pad shall consist of poured concrete masonry, 6 inches deep by 12 inch (minimum) wide Grade A as provided in section 501 of the WisDOT standard specifications. The wall-leveling pad shall be as wide as the proposed blocks or 12 inches (minimum) whichever is greater. The bottom of the bottom row of blocks shall be flat and 100% of the block surface shall bear on the leveling pad. The leveling pad shall step to follow the general slope of the ground line. The leveling pads steps shall keep the bottom of the wall within one block thickness of the minimum embedment, i.e., a minimum embedment plus an additional embedment of up to one block's thickness. Additional embedment may be detailed, but will not be measured for payment.

Wall Facing: Wall facing units shall consist of precast modular concrete blocks. All units shall incorporate a mechanism or devices, which will develop a mechanical connection between vertical block layers. A single block type and style shall be used throughout each wall. The color of the block shall be as given on the plan or chosen by the Engineer. Modular block facing units, which are chipped, cracked or unsightly, shall not be used.

The top course of facing units shall be a solid precast concrete unit designed to be compatible with the remainder of the wall. The finishing course shall be bonded to the underlying facing units with a durable, high strength, flexible adhesive compound compatible with the block material. A formed cast-in-place concrete cap may also be used to finish the wall. A cap of this type shall be designed to have texture, color, and appearance, which complement the remainder of the wall. The vertical dimension of the cap shall not be less than 3 1/2 inches. Expansion joints shall be placed in the cap to correspond with each 24-inch change in vertical wall height or at a maximum spacing of 10 feet. Concrete for all cast-in-place caps shall be Grade A and shall conform to the requirements of Subsection 501.4 of the WisDOT Standard Specifications.

Block dimensions may vary no more than \pm 1/8 inch from the standard values published by the manufacturer. Blocks must have a minimum depth (front face to back face) of 8 inches. The minimum front face thickness of blocks shall be 4 inches measured perpendicular from the front face to inside voids greater than 4 square inches. Also the minimum allowed thickness of any other portions of the block is 2 inches. The front face of the blocks shall conform to plan requirements for color, texture, or patterns.

Cementitious materials and aggregates for modular blocks shall conform to the requirements of ASTM C1372 Section 4.1 and 4.2. Modular blocks shall meet the following requirements.

Test	Method	Requirement
Compressive Strength (psi)	ASTM C140	5000 min.
Water Absorption (%)	ASTM C140	6 max.
Freeze-Thaw Loss (%)	ASTM C1262 (1)	
40 cycles, 5 of 5 samples		1.0 max. (2)
50 cycles, 4 of 5 samples		1.5 max. ⁽²⁾

⁽¹⁾ Test shall be run using a 3% saline solution.

⁽²⁾ Test results that meet either of the listed requirements for Freeze-Thaw Loss are acceptable.

All blocks shall be certified as to strength, absorption, and freeze-thaw requirements. At the time of delivery of certified blocks, furnish the Engineer a certified test report from an independent testing laboratory for each lot of modular blocks. The certified test report shall clearly identify the firm conducting the sampling and testing, the type of block, the date sampled, name of the person who conducted the sampling, the represented lot, the number of blocks in the lot, and the specific test results for each of the stated requirements of this specification. A lot shall not exceed 5000 blocks. The certified test results will represent all blocks within the lot. Each pallet of blocks delivered shall bear lot identification information. Block lots that do not meet the requirements of this specification or blocks without supporting certified test reports will be rejected and shall be removed from the project at no expense to the department.

Geogrids: Geogrid supplied as reinforcing members shall be manufactured from long chain polymers limited to polypropylene, high-density polyethylene, polyaramid, and polyester.

Geogrids shall form a uniform rectangular grid of bonded, formed, or fused polymer tensile strands crossing with a nominal right angle orientation. The minimum grid aperture shall be 0.5 inch. The geogrid shall maintain dimension stability during handling, placing, and installation. The geogrid shall be insect, rodent, mildew, and rot resistant.

The geogrid shall be furnished in a protective wrapping, which shall prevent exposure to ultraviolet radiation and damage from shipping or handling. The geogrid shall be kept dry until installed. Each roll shall be clearly marked to identify the material contained.

The wall supplier shall supply the allowable Tension Reinforcement Load (T_A) used in the design for each reinforcement layer. The following shall apply to walls over 5 ft. tall on average as measured from the top of the leveling pad to the top of the wall. The wall system composed of geogrid and modular blocks wall shall be from a preapproved supplier corresponding with their preapproved geogrid and modular blocks. The current list of preapproved geogrids and their corresponding modular blocks is maintained by the WisDOT Structures Development Section and may be obtained by calling 608-266-8494. Only geogrid and modular blocks preapproved before contract letting will be allowed in the construction of the wall.

The value of T_A for a specific geogrid shall be the lowest value as determined by the following two methods for each layer used.

1. The Ultimate Tensile Strength (T_{ult}) divided by the factors RF_{ID}, RF_{CR}, RF_D and FS.

Hence,

$$T_A = \frac{T_{ult}}{RF_{ID}x RF_{CR} x RF_D x FS}$$

where:

 T_{ult} = is the ultimate tensile strength of the reinforcement determined from wide width tensile tests (ASTM D4595) for geogrids, or rib tensile test (GRI:GG1), but at a strain rate of 10% per minute.

 RF_{ID} = strength reduction factor to account for installation damage to the reinforcement. In no case shall RF_{ID} be less than 1.1.

 RF_{CR} = strength reduction factor to prevent long-term creep rupture of the reinforcement. In no case shall RF_{CR} be less than 1.2.

 RF_D = strength reduction factor to prevent rupture of the reinforcement due to chemical and biological degradation. In no case shall RF_D be less than 1.1.

FS = a global safety factor which accounts for uncertainties in structure geometry, fill properties, externally applied loads, overstress due to load nonuniformities, and uncertainties in long-term reinforcement strength shall be 1.5.

Values for RF_{ID}, RF_{CR}, and RF_D shall be determined from product specific test results.

Guidelines for how to determine RF_{ID}, RF_{CR}, and RF_D from product specific data are provided in FHWA Publication No. FHWA SA-96-071 "Mechanically Stabilized Earth Walls and Reinforced Soil Slopes Design and Construction Guidelines" Appendix B, and in FHWA Publication No. FHWA SA-96-072 "Corrosion/Degradation of Soil Reinforcements for Mechanically Stabilized Earth Walls and Reinforced Soil Slopes".

2. The geogrid connection load (T_B) divided by the factor FS = 1.5. Hence,

$$T_A = \frac{T_B}{FS}$$

The Geogrid Connection Load (T_B) is defined as the maximum tension load which may be developed in a geogrid reinforcement layers which will result in no more than 0.75 inches of deformation. This value shall be determined from tests conducted on the same facing blocks and grids as proposed for the wall and shall cover a range of overburden pressures comparable to those anticipated in the proposed wall. The value of T_B for any specific layer shall be determined for the overburden pressure applied to that specific layer. The test shall be conducted on grid samples at least 8 inches wide and at a rate of elongation not exceeding 0.05 inches per minute. The geogrid shall remain normal to the block face during loading. The Contractor shall provide to the Engineer all load test data used to determine the value of T_B .

The Contractor shall submit the following items for the review and acceptance of the Engineer.

- 1. The Allowable Reinforcement Tension Load (T_A) for the geogrid to be supplied.
- 2. The values of T_{ult} , RF_{ID} , RF_{CR} , RF_D and T_B used to determine T_A .

Work on the wall shall not begin until the Engineer accepts these submittals.

Galvanized Metal Reinforcement: In lieu of polymeric geogrid earth reinforcement, galvanized metal reinforcement may be used. Design and materials shall be in accordance with Section 5.8.6.1.1 of the current AASHTO Specifications.

Connectors: Pins, rods, clips, or other devices used to develop mechanical interlock between facing unit block layers shall be manufactured from corrosion resistant materials. The Contractor shall furnish documentation which establishes and substantiates the design life of such devices.

Backfill Materials: Wall Backfill, Type A, shall comply with the requirements for Coarse Aggregate No. 1 as given in 501.2.5.4.4 of the WisDOT Standard Specifications. All backfill placed within a zone from the base of the leveling pad to the top of the final layer of wall facing units and within 1 foot behind the back face

of the wall shall be Wall Backfill, Type A. This includes all material used to fill openings in the wall facing units.

Wall Backfill, Type B, shall comply with the requirements for Grade 1 Granular Backfill as contained in 209.2.2 of the WisDOT Standard Specifications. All backfill placed in a zone extending horizontally from 1 foot behind the back face of the wall to 1 foot beyond the end of the reinforcement and extending vertically from the base of the leveling pad to the top of the final layer of all facing units shall be Wall Backfill, Type B.

All backfill used within the reinforced zone shall have a pH of 4.5 to 10 as determined by AASHTO Procedure T-289. In addition to the above, backfill used on walls with metallic reinforcement shall have a chloride content of less than 100 parts per million as determined by AASHTO Procedure T-291, sulfates of less than 200 parts per million as determined by AASHTO Procedure T-290, and an electrical resistivity greater than 3000 ohms per centimeter as determined by AASHTO Procedure T-288. Prior to placement of the backfill, the Contractor shall obtain and furnish to the Engineer certified test results that the backfill material complies with the requirements of this specification. An independent certified laboratory shall perform all testing.

All other backfill materials required to finish the wall and restore the ground surface may be selected material available on the project, which meets the Engineer's approval.

CONSTRUCTION METHODS

After completion of excavation, the Engineer will inspect the site and determine if the foundation is adequate for the intended loads. The Engineer shall be allowed two working days to perform the inspection.

The wall facing units shall be placed in accordance with the manufacturer's instructions to the lines, elevations, batter, and tolerances as shown on the plans. The initial layer of facing units shall be centered on the leveling pad, leveled and brought to proper alignment. Formed voids or openings in the facing units shall be filled with Wall Backfill, Type A. Each layer of facing units shall be swept clean of all debris before the next layer of facing units is placed.

All pins, rods, clips, or other devices used to develop mechanical interlock between facing unit layers shall be installed in accordance with the manufacturer's directions. Wall units, which are cracked, chipped, or unsightly, will be rejected by the Engineer.

All excavation for the Mechanically Stabilized Earth Modular Block Wall shall conform to Section 206 of the WisDOT Standard Specifications. At the end of each working day, the Contractor shall provide good temporary drainage such that the backfill shall not become contaminated with run-off soil or water if it should rain. No materials or large equipment shall be stockpiled or stored within 10 feet of the front face of the wall.

Backfill: Materials shall be placed in the areas as indicated on the plans and as detailed in this specification. Backfill lifts shall be no more than 8-inches in depth. Backfilling shall closely follow erection of each course of wall facing units. Compaction of Wall Backfill Type A shall be accomplished by at least three passes of lightweight manually operated compaction equipment acceptable to the Engineer.

Wall Backfill Type B shall be compacted as specified in Subsection 207.3.6 of the WisDOT Standard Specifications. For walls with a maximum height of any portion greater than 5 feet, Wall Backfill Type B shall be compacted to 95% of maximum density as determined by AASHTO T-99, Method C. Compaction testing shall be performed by the Contractor. Testing shall be conducted at a minimum frequency of 1 test per 2-foot layer per 200 feet of wall, or major portion thereof. Documentation of the results of all compaction

testing shall be delivered to the Engineer at the time of testing. The City Of Madison may perform quality control compaction tests on walls less than 5 ft. tall to ensure compliance with Subsection 207.3.6 of the WisDOT Standard Specifications.

Backfilling operations shall be conducted in such a manner as to prevent damage or misalignment of the wall facing units, soil reinforcement, or other wall components. Any such damage or misalignment shall be corrected at the Contractor's expense as directed by the Engineer. A field representative of the wall supplier shall be available during wall construction to provide technical assistance to the Contractor and the Engineer.

No tracked or wheeled equipment may operate on the backfill within 3 feet from the back face of modular blocks. The Engineer may order the removal of any large or heavy equipment, which may cause damage, or misalignment of the wall facing units.

Soil Reinforcement: Soil reinforcement shall be placed at the positions and to the lengths as indicated on the accepted shop drawings. Backfill materials below the reinforcement layer shall be compacted and leveled prior to reinforcement placement. Backfill placement over the positioned soil reinforcement elements shall not cause damage or misalignment of these elements. Any such damage or misalignment shall be corrected as directed by the Engineer. No wheeled or tracked equipment shall be allowed to operate directly on the soil reinforcement. A minimum cover of 6 inches is required before such operation is allowed.

Geogrid Layers: Geogrid material shall be placed and anchored between wall unit layers in the same manner as used to determine the Geogrid Connection Load (T_B). The grid material shall be placed so that the machine direction of the grid is perpendicular to the wall face. Each grid layer shall be continuous throughout the lengths indicated on the plans. Grid strips shall be joined with straps, rings, hooks or other mechanical devices to prevent movement during backfilling operations. Prior to placing backfill on the grid, the grids shall be pulled taunt and held in position with pins, stakes or other methods approved by the Engineer.

Steel layers: Steel reinforcement shall be placed full width in one piece as shown on the plans. No splicing will be allowed. Elements shall be maintained in position during backfilling.

METHOD OF MEASUREMENT

Mechanically Stabilized Earth Modular Block Wall shall be measured by the square foot of face on a vertical plane between the top of the leveling pad and a line indicating the top of wall including wall cap or copings as required and shown on the plans. Unless ordered by the Engineer, wall area constructed above or below these limits will not be measured for payment. The total quantity will be the sum of the quantities for each wall.

BASIS OF PAYMENT

Mechanically Stabilized Earth Modular Block Wall, measured as provided above, will be paid for at the contract unit price per square foot, which shall be full compensation for supplying a design and shop drawings, site preparation, including all necessary excavation and disposal of surplus materials, supplying all necessary wall components to produce a functional system, construction of the retaining system, backfill, backfilling, compaction testing, and for furnishing all tools, labor, and equipment necessary to complete the work. Parapets, railings, and other items above the wall cap or coping will be paid for separately. Any required topsoil, fertilizer, seeding or sodding and mulch will be paid for separately.

BID ITEM 90002 - REPAIR EXISTING CONCRETE RETAINING WALL

DESCRIPTION

This special provision describes completion of the work necessary to repair the existing concrete retaining wall along the north edge of the University Avenue parking lot as described here and shown in the plans. Work required to repair the concrete retaining wall includes excavation, sawcutting, forming, supplying and placement of reinforcing steel and concrete necessary to repair the existing retaining wall. All work required to repair the existing concrete retaining wall shall be in accordance with Part III of the Standard Specifications, and the plans, details, and as hereinafter provided.

METHOD OF MEASUREMENT

Repair Concrete Retaining Wall shall be measured by the square foot of face on a vertical plane between the top of the footing and a line indicating the top of wall. Unless ordered by the Engineer, wall area constructed above or below these limits will not be measured for payment.

BASIS OF PAYMENT

Repair Concrete Retaining Wall, measured as provided above, will be paid for at the contract unit price per square foot, which shall be full compensation for site preparation, including all necessary excavation and disposal of surplus materials, supplying all necessary materials and equipment to produce a functional repair to the existing wall, backfill, backfilling, compaction testing, and for furnishing all tools, labor, and equipment necessary to complete the work. Any required topsoil, seeding and mulching will be paid for separately.

BID ITEM 90003 – TEXTURED AND COLORED CONCRETE SIDEWALK 5"

DESCRIPTION

This special provision describes furnishing and installing Textured and Colored 5-Inch Concrete Sidewalk, complete and accepted in place, including base materials, sealer and samples in accordance with Article 303 of the Standard Specifications, and the plans, details, and as hereinafter provided.

MATERIALS – GENERAL

At least fifteen working days prior to the start of textured and colored concrete installation, supply one 4 foot x 4-foot panel sample of the textured and colored concrete. Obtain approval from the Engineer for the final color and stamp pattern prior to placing any colored imprinted concrete in the field.

The sample shall become the property of the City of Madison upon completion of this project.

WATER EVAPORATIVE REDUCER (CON FILM)

Use a water evaporative reducer to hold in the bleed water for the dry shake color hardener application. The water evaporative reducer shall be Dayton Superior Sure Film (J-74), Master Builders Confilm, or equal as approved by the Engineer. It is recommended that the Contractor confirm the type of water evaporative reducer to be used with the manufacturer of color hardener.

DRY SHAKE COLOR HARDENER

Use Brickform Rafco Products color #700, Terra Cotta, dry shake color hardener.

RELEASE AGENT

Use Brickform Rafco Products color #300, Nutmeg powder release agent.

CURING COMPOUND

The curing compound shall meet the specifications of ASTM C 1315 Type I Class A clear non-yellowing curing compound.

IMPRINTING PATTERN

Use a 6" x 6" cobblestone pattern matching previous segments of East Washington Avenue.

CONSTRUCTION

An experienced Contractor who has installed a minimum of 30,000 square feet of colored and imprinted concrete shall install Textured and Colored 5-Inch Concrete Sidewalk. The Contactor shall submit written documentation of imprinted concrete work to the Engineer prior to the start of construction. Apply water evaporative reducer per manufacturer's recommendations. Protect all adjoining areas of concrete. Finish concrete and apply dry shake color hardener in accordance to the manufacturer's recommendations. Hand-broadcast the color hardener uniformly across the concrete in two separate broadcasting operations (shakes). Apply two-thirds of the material in the first shake and without one-third for the second shake and final touch-up, as necessary. Apply the two shakes at 90 degrees to each other. The necessary moisture for wetting the color hardener must come from the concrete substrate. Adding water to the concrete surface to work in the dry shake color hardener is not permitted. Use a wood float for applying the dry shake color hardener unless the use of a wood float is in conflict with the manufacturer's recommendation.

Apply release agent in accordance to the manufacturer's recommendations.

Stamping method shall be in accordance to the manufacturer's specified methods. Check all depths of imprints by tool-to-tool surface leveling.

Perform tooling as stamping tools are removed after imprinting. Eliminate all squeeze joints between stamping tools, if any, with hand tools prior to concrete settings.

Remove excess release agent from the concrete seventy two (72) hours after placement using a stiff brush and a mild murataic acid solution (approximately 4 oz per 2.5 gallons water) to achieve desired color. Rinse and let dry. Apply curing compound at 350 SF/gal coverage rate or in accordance to manufacturer's recommendations to seal the concrete immediately after drying.

Joint the concrete in accordance with the standard specifications amended as follows: Saw joints such that the saw joint follows the concrete recess.

Textured and Colored 5-Inch Concrete Sidewalk shall match the visual appearance of the approved reference sample. Replace Textured and Colored 5-Inch Concrete Sidewalk not conforming to the reference sample at a Contractor expense.

METHOD OF MEASUREMENT

Textured and Colored 5-Inch Concrete Sidewalk shall be measured by the square feet of Textured and Colored 5-Inch Concrete Sidewalk installed and accepted.

BID ITEM 90030 - CONSTRUCTION SITE TRACKING CONTROL

DESCRIPTION

Work performed under this bid item shall include all labor, materials, and incidentals necessary to control sediment tracking off the construction site. Specific requirements will be determined by the Construction Engineer. Site requirements may include as necessary: a small, clear stone tracking pad (approximately 20'x10'), street sweeping, and application of polymer stabilization, or any combination of these. The purpose of this bid item is to provide the Contractor and the Construction Engineer the means to mitigate and control off-site tracking of sediment from this small construction site. Any clear stone required to meet the directives of the Construction Engineer shall be considered incidental to this bid item.

METHOD OF MEASUREMENT

Construction Site Tracking Control shall be measured as a lump sum.

BASIS OF PAYMENT

Construction Site Tracking Control shall be measured as described above, which shall be considered full compensation for all work, materials, and incidentals to complete the work as described above.

BID ITEM 90031 - BIORETENTION BASIN

DESCRIPTION

Work under this item shall include: all work (including but not limited to: excavation, removal, and disposal of existing material, provision and placement of engineered material) and materials (including but not limited to 3-inch clear stone, filter fabric, engineered fill, light riprap and mulch), labor, and incidentals required to construct the bioretention system meeting the sizes, locations, specifications, and detail drawings contained in this document and in the plan set.

The Contractor shall review the detail drawings for each system in detail. The size of the bioretention basin is specific as is the means of providing stormwater to the system. This item does not include planting of the bioretention systems. Planting will be completed by others during the summer of 2012.

Specifically included are the following:

- 1) Excavation, removal and disposal off site, at a location provided by the Contractor, of existing material to the bottom of bio-retention system grade shown on the detail drawings.
- Standard excavation shall begin at the outer polygon shown on the detail drawings and shall be on a continuous slope from the existing elevation to the finish horizontal location and elevation as depicted by the inner polygon. This inner polygon represents the bottom (or effective infiltration area of the bioretention system). Excavation below finish grade and replacement of existing material with engineered fill and clear stone is required only below the inner polygon. Excavation below finish grade inside the inner polygon shall consist of five (5) feet of excavation below the finish grade shown on the detail drawings. This volume shall then be filled with two (2) feet of 3-inch clear stone, followed by three (3) feet of engineered fill (meeting the specifications below) to

- the finish grade noted on the detail. Three inches of wood mulch shall be added above the finish elevations noted on the details.
- All ULO's needed to construct each bioretention; there are utilities (gas, sanitary & water) near this feature. All work necessary to locate and work around these utilities is included in the price for these items. If any utility is located within the excavation depths of the clear stone or engineered fill, the Contractor shall excavate with caution and use proper construction methods. The Contractor shall install Rock Shield around the existing utility to provide protection which shall be incidental to this item.
- 4) Provision and proper placement of all required 3-inch clear stone, which shall be the foundation for the bioretention basin.
- Provision and placement of Type HR filter fabric. The fabric shall be placed between the clear stone and engineered fill, and between the clear stone and native soil, as shown on the detail drawing. Filter fabric shall be placed according to manufacturer's instructions, including overlap instructions.
- 6) Provision and placement of engineered fill as called out on the detail drawing. Fill materials shall meet the specifications below.
- 7) All finishing work required to provide a finished engineered soil layer prior to placement of mulch.
- Provision and placement of wood mulch cover. Mulch shall be placed on top of engineered fill and above the finish grade noted in the plan set and shall be placed immediately after finish grading is complete. Wood mulch available at the City of Madison brush processing facility is acceptable material. The Contractor shall coordinate the purchase and supply of this mulch.
- 9) Construction of the bioretention basin outlet structure and flume shall be paid for under separate bid items.

ENGINEERED SOIL SHALL MEET THE FOLLOWING:

1) The planting mixture shall consist of a mixture of sand, compost and topsoil. The mix shall be designed to approximate the following percentages, by volume.

Engineered Soil Component	% Composition by Volume
Sand	45-55%
Topsoil	10-15%
Compost	30%-50%

- 2) The sand component shall at a minimum meet the following criteria:
 - a. Crushed & screened sandstone
 - b. 100% passing a #4 sieve
 - c. Maximum of 5% passing a #200 sieve
- The topsoil component shall be a USDA classified sandy loam, loamy sand or loam texture. The topsoil component textural class shall be verified by a laboratory analysis or a professional acceptable to the jurisdiction having authority. The topsoil shall be pulverized prior to mixing with the other materials. No soil particle size over 1" diameter shall be accepted and will require removal of all material from the site and a new mix being provided.
- 4) The compost component shall meet the requirements listed below:
 - a. Particle Size -98% of the compost shall pass through a 0.75-inch screen.
 - b. Physical Contaminants Less than 1% combined glass, metal and plastic.

- c. Organic Matter/Ash Content At least 40% organic matter; less than 60% ash content.
- d. Carbon to Nitrogen Ratio 10-20:1 C:N ratio.
- e. Ph Between 6 and 8.
- f. Soluble Salts Electrical conductivity below 10 Ds m-1 (mmhos cm -1)
- g. Moisture Content Between 35% and 50% by weight.
- h. Maturity The compost shall be resistant to further decomposition and free of compounds, such as ammonia and organic acids, in concentrations toxic to plant growth.
- i. Residual Seeds & Pathogens Pathogens and noxious seeds shall be minimized.
- j. Pathogens The compost shall meet the Class A requirements for pathogens as specified in s. NR 204.07(6)(a), Wis. Adm. Code.
- k. Other Chemical Contaminants The compost shall meet the high quality pollutant concentrations as specified in s. NR 204.07(5)I, Wis. Adm. Code.
- The engineered soil mix shall be free of rocks, stumps, roots, brush or **other material over**1 inch in diameter. No other materials shall be mixed with the planting soil that may be harmful to plant growth or prove a hindrance to planting or maintenance.

METHOD OF MEASUREMENT

Bioretention Basin shall be measured as a lump sum for all work described above.

BASIS OF PAYMENT

Bioretention System shall be measured as described above which shall be full compensation for all work, materials and incidentals to complete the work as described above.

BID ITEM 90032 – CONCRETE FLUME

DESCRIPTION

Work performed under this bid item shall include all labor, materials, and incidentals necessary to construct a concrete flume as depicted on the plan set. The Contractor shall construct a curbed flume that ties into the curb and gutter of the parking lot, per the detail drawing. Any rebar or clear stone subgrade material required for construction of the flume shall be considered incidental to this bid item.

METHOD OF MEASUREMENT

Concrete Flume shall be measured as each flume completed in the field.

BASIS OF PAYMENT

Concrete Flume shall be measured as described above, which shall be considered full compensation for all work, materials, and incidentals to complete the work as described above.

BID ITEM 90033 - REMOVE ACCESS STRUCTURE CASTING

DESCRIPTION


Work performed under this bid item shall include all labor, materials, and incidental required to remove the existing access structure casting, as noted on the plan set. The void in the access structure shall be covered with a 1" steel plate of adequate size so that there is a minimum of 6 inches of overlap on all sides of the void. The plate shall be bolted in place with galvanized steel bolts a minimum of 1/2-inch in diameter and adequate length.

METHOD OF MEASUREMENT

Remove Access Structure Casting shall be measured as each for all work described above.

BASIS OF PAYMENT

Remove Access Structure Casting shall be measured as described above, which shall be considered full compensation for all work, materials, and incidentals to complete the work as described above.

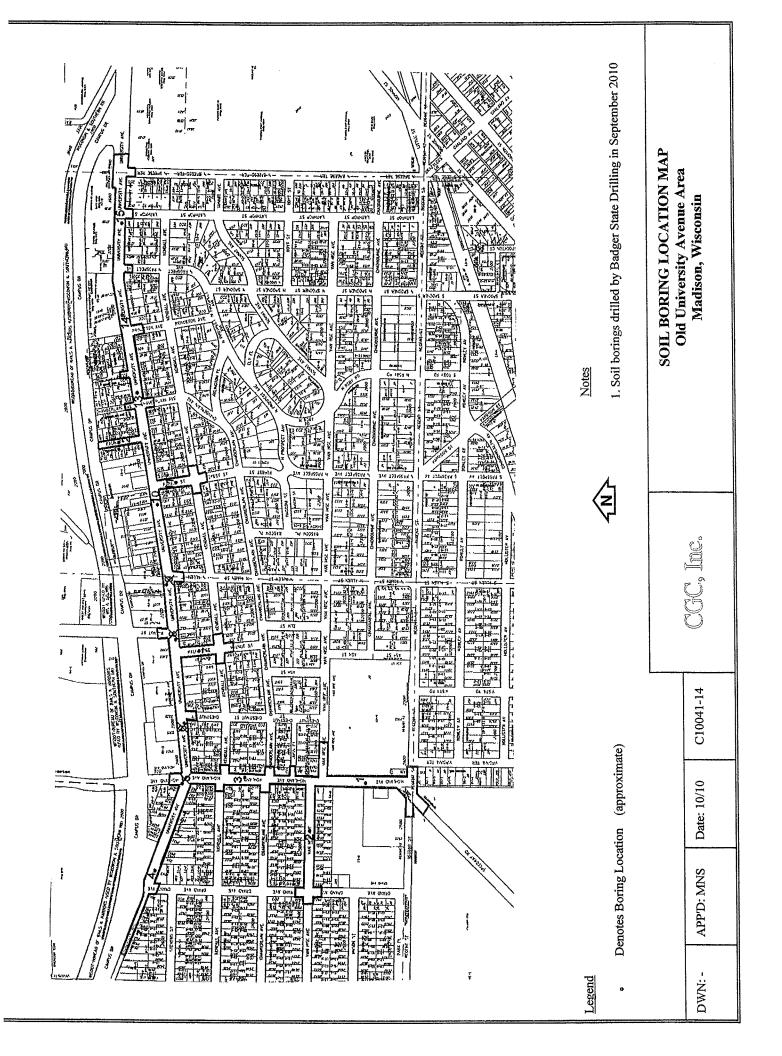


()(_)()	lnc
	INC.)

LOG OF TEST BORING

Project Old University Avenue Area
University: 150'E of Grand, 3'N of Centerline
Location Madison, Wisconsin

Boring No. 4
Surface Elevation (ft) 96.0*
Job No. C10041-14
Sheet 1 of 1

Ĺ				_ 2921	Perr	y Street, Madison, WI 53713 (608) 288-4100, FA	AX (608)	288-7887-				
SAMPLE			VISUAL CLASSIFICATION		SOIL	PRC	PEF	RTIE	S			
No.	T Rec P (in.	Moist	N	Depth (ft)		and Remarks		qu (qa) (tsf)	W	ГГ	PL	ΓΙ
4		3.6	50/011	- - -	X	6" Asphalt Pavement/8" Concrete Pavement/8" Base Course						
1	4	M	50/2"	<u>├</u> <u> </u>		Boulder at 2 ft						
						FILL: Brown Clay, Sand and Gravel with						
2	16	M	4			Occasional Cobbles/Boulders						
3	12	M	10	⊢ ∐- I		Stiff, Brown Mottled Lean CLAY (CL)		····				
				_			-	(1.5)	<u> </u>			
4	16	M	19	 - -		Greenish-Brown Silty Fine SAND (SM) (Residence)	lual					
				10-								
5	16	M	29		ligi Gir Ligi		-					
				13 		End Boring at 15 ft						
		-		-		Borehole backfilled with bentonite chips						
				- - - - - 20-		*Elevation determined using an assumed datum 100.0 ft referencing the top nut of a hydrant situated along Grand at the southeast corner of intersection with University.						
				- - -								
				 								Taylor and the same of the sam
			W	- — 25— NTFR		VEL OBSERVATIONS	ح	ENER/	N	TF		
Time Dept Dept	le Drill After th to W	Drillir ater ive in	<u>∇</u> N	<u>W</u>	J	Jpon Completion of Drilling NW Start Drille Logg	9/28 er Bad ger R	7/10 End ger Chie	9/29 f J	8/10 R I		ME-55
so	il type	s and	the ti	cansiti	on ma	ent the approximate boundary between when be gradual.						

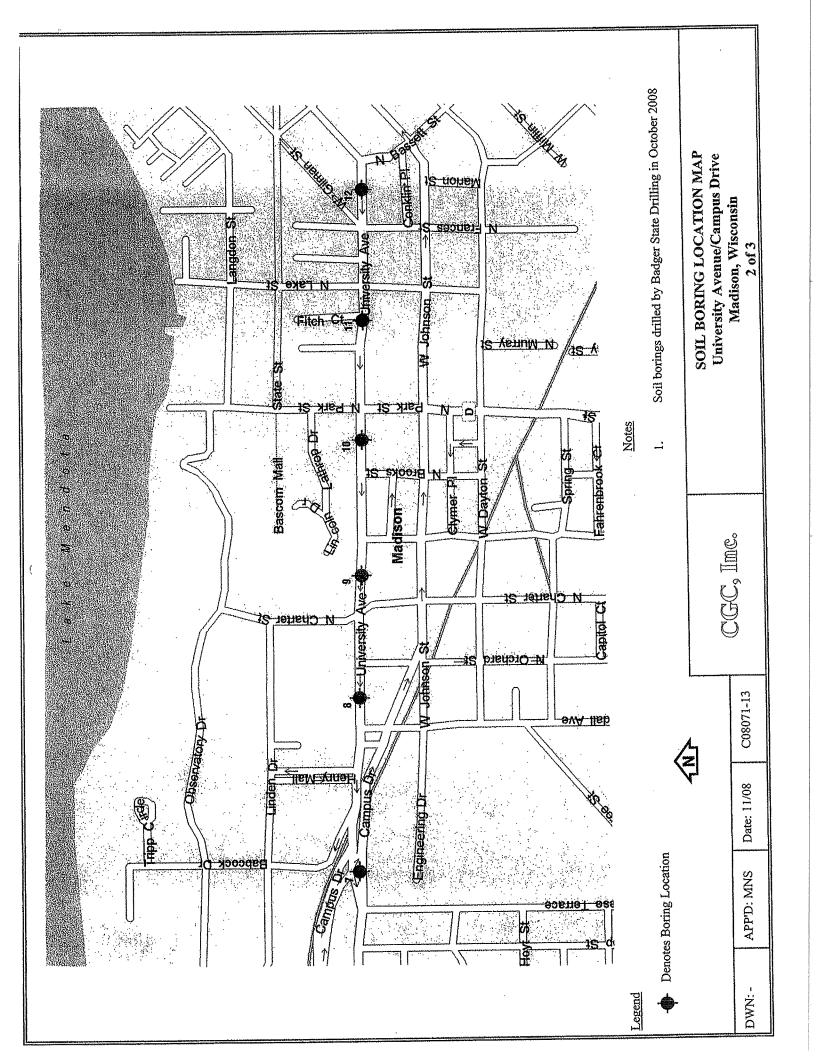

_	-			
7			س ا	1
(ام			1C. J
/				

Depth to Cave in

The stratification lines represent the approximate boundary between

LOG OF TEST BORING

Boring No. 7 Surface Elev. (ft) Project University Avenue/Campus Drive Job No. **C08071-13** 150' E of Breese Terrace, at Centerline Sheet 1 of 1 Location Madison, Wisconsin

2921 Perry Street, Madison, WI 53713 (608) 288-4100, FAX (608) 288-7887 -**SOIL PROPERTIES** SAMPLE VISUAL CLASSIFICATION Depth and Remarks Rec (qa) Moist No. (in.) (ft) (tsf) 6.5 in. Asphalt Pavement FILL: Brown Clay & Silty Sand M Stiff, Brown Lean CLAY (CL) 2X 18 M (1.0-1.5)2 Becoming Soft to Medium Stiff, Dark Brown and Sandy at 5 ft 3 18 W/M Soft, Brown Sandy Lean Clay (CL) (0.5)Occasional Seams (2-4 in.) of Fine Sand and/or Silt 18 M/W 22 4X Becoming Very Soft to Soft at 9 ft (0.25-0.5)Very Stiff to Hard Brown Mottled Lean CLAY (CL) 5 18 M 41 (4.0)End Boring at 15 ft Borehole backfilled with bentonite chips **GENERAL NOTES** WATER LEVEL OBSERVATIONS 10/20/08 End 10/20/08 <u>∑</u> 6.0¹ Start Upon Completion of Drilling While Drilling Driller Badger Chief RM Rig CME-5
Logger GFP Editor ESF
Drill Method 2 1/4 in. HSA Time After Drilling Depth to Water

SECTION E: PROPOSAL

UNIVERSITY AVENUE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVENUE/CAMPUS DRIVE/BREESE TERRACE INTERSECTION RECONSTRUCTION CONTRACT NO. 6815

Bidder must state a Unit Price and Total Bid for each item. The Total Bid for each item must be the product of quantity, by Unit Price. The Grand Total must be the sum of the Total Bids for the various items. In case of multiplication errors or addition errors, the Grand Total with corrected multiplication and/or addition shall determine the Grand Total bid for each contract. The Unit Price and Total Bid must be entered numerically in the spaces provided. All words and numbers shall be written in ink.

1.	The undersigned having familiarized himself/herself with the Contract documents, including Advertisement for Bids, Instructions to Bidders, Form of Proposal, City of Madison Standard Specifications for Public Works Construction - 2012 Edition thereto, Form of Agreement, Form of Bond, and Addenda issued and attached to the plans and specifications on file in the office of the City Engineer, hereby proposes to provide and furnish all the labor, materials, tools, and expendable equipment necessary to perform and complete in a workmanlike manner the specified construction on this project for the City of Madison; all in accordance with the plans and specifications as prepared by the City Engineer, including Addenda to the Contract Nos.
2.	through issued thereto, at the prices for said work as contained in this proposal. If awarded the Contract, we will initiate action within seven (7) days after notification or in accordance with the date specified in the contract to begin work and will proceed with diligence to bring the project to full completion within the number of work days allowed in the Contract or by the calendar date stated in the Contract.
3.	The undersigned Bidder or Contractor certifies that he/she is not a party to any contract, combination in form of trust or otherwise, or conspiracy in restraint of trade or commerce or any other violation of the anti-trust laws of the State of Wisconsin or of the United States, with respect to this bid or contract or otherwise.
4.	Accompanying this Proposal is Bid Bond or Certified Check in the amount of Dollars (\$
5.	I hereby certify that all statements herein are made on behalf of
SIGNAT	URE
TITLE, I	FANY
Sworn	and subscribed to before me this day of, 20
Му Сс	y Public or other officer authorized to administer oaths) ommission Expires

04/09/12-6815).doc E-1

UNIVERSITY AVENUE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVENUE/CAMPUS DRIVE/BREESE TERRACE INTERSECTION RECONSTRUCTION

CONTRACT NO. 6815

State of Wisconsin
Department of Workforce Development
Equal Rights Division
Labor Standards Bureau

Disclosure of Ownership

Notice required under Section 15.04(1)(m), Wisconsin Statutes. The statutory authority for the use of this form is prescribed in Sections 66.0903(12)(d) and 103.49(7)(d), Wisconsin Statutes. The use of this form is mandatory. The penalty for failing to complete this form is prescribed in Section 103.005(12), Wisconsin Statutes. Personal information you provide may be used for secondary purposes.

- (1) On the date a contractor submits a bid to or completes negotiations with a state agency or local governmental unit, on a project subject to Section 66.0903 or 103.49, Wisconsin Statutes, the contractor shall disclose to such state agency or local governmental unit the name of any "other construction business", which the contractor, or a shareholder, officer or partner of the contractor, owns or has owned within the preceding three (3) years.
- (2) The term "other construction business" means any business engaged in the erection, construction, remodeling, repairing, demolition, altering or painting and decorating of buildings, structures or facilities. It also means any business engaged in supplying mineral aggregate, or hauling excavated material or spoil as provided by Sections 66.0903(3), 103.49(2) and 103.50(2), Wisconsin Statutes.
- (3) This form must ONLY be filed, with the state agency or local governmental unit that will be awarding the contract, if **both (A) and (B) are met**.
 - (A) The contractor, or a shareholder, officer or partner of the contractor:
 - (1) Owns at least a 25% interest in the "other construction business", indicated below, on the date the contractor submits a bid or completes negotiations.
 - (2) Or has owned at least a 25% interest in the "other construction business" at any time within the preceding three (3) years.
 - (B) The Wisconsin Department of Workforce Development (DWD) has determined that the "other construction business" has failed to pay the prevailing wage rate or time and one-half the required hourly basic rate of pay, for hours worked in excess of the prevailing hours of labor, to any employee at any time within the preceding three (3) years.

Other Cons	truction Busi	ness		
Name of Business				
Street Address or P O Box		City	State	Zip Code
Name of Business	A	J	_1	
Street Address or P O Box		City	State	Zip Code
Name of Business				<u> </u>
Street Address or P O Box		City	State	Zip Code
I hereby state under penalty of perjury that the info according to my knowledge and belief.	rmation, cont	tained in this document, is	true and	d accurate
Print the Name of Authorized Officer				
Signature of Authorized Officer	Date Signed			100000000000000000000000000000000000000
Name of Corporation, Partnership or Sole Proprietorship	1			
Street Address or P O Box		City	State	Zip Code

If you have any questions call (608) 266-0028

ERD-7777-E (R. 09/2003)

UNIVERSITY AVENUE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVENUE/CAMPUS DRIVE/BREESE TERRACE INTERSECTION RECONSTRUCTION CONTRACT NO. 6815

Best Value Contracting

1.	The Co	ontractor shall indicate the non-apprenticeable trades used on this contract.
	-	
2.		Contractors are exempt due to the size of the work force. Apprenticeable trades are those considered apprenticeable by the State of Wisconsin.
		Check Here if the Contractor has a total skilled work force of four or less individuals in all apprenticeable trades combined. This contractor is exempt from Best Value Contracting.
3.	Contrac	ontractor shall indicate on page E-4 which apprenticeable trades are to be used on this ct and shall indicate by checking the appropriate box for the trades used, how the stor will comply with Madison General Ordinance 33.07(7).
		Legend
Numbe Journe W-AT	yworkers	The Contractor shall indicated for trades to be used on this Contract only, the number of journeyworkers that the Contractor has employed company wide. The Contractor is an active trade trainer in the State of Wisconsin for the trade indicated.
US-AT	T	The Contractor is an active trade trainer in an apprenticeship program approved by the U.S. Department of Labor or another state apprenticeship agency in the trade
SB-AT	Т	indicated. The Contractor shall become an active trade trainer prior to beginning work on the Contract in the trade indicated.
	The Co	ontractor has reviewed the list on page E-4 and shall not use any apprenticeable trades on bject.
		ontractor has reviewed this list on E-4 and has checked the appropriate box by each ticeable trade to be used on the project.

04/09/12-6815).doc E-3

UNIVERSITY AVENUE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVENUE/CAMPUS DRIVE/BREESE TERRACE INTERSECTION RECONSTRUCTION CONTRACT NO. 6815

Apprenticeable Trades

Check the box in the column "Trade Used on This Project" for each apprenticeable trades used on this project. For those trades used on the project indicated the number of journeyworkers that are employed company wide and check a box to the right of the trade as to how the Contractor will comply MGO 33.07(7). Refer to the legend on page E-3 for the meaning associated with each heading. The Contractor must check one of the boxes on the right for each apprenticeable trade used and checked on the left.

Trade Used on		Number of			
Contract	Apprenticeable Trades	Journeyworkers	W-ATT	US-ATT	SB-ATT
	Bricklayer				
	Carpenter				
	Cement Mason / Concrete Finisher				
	Cement Mason (Heavy Highway)				
	Construction Craft Laborer				
	Data Communication Installer				
	Electrician				
	Environmental Systems Technician / HVAC Service Tech/HVAC Install / Service				
	Glazier				
	Heavy Equipment Operator / Operating Engineer				
	Insulation Worker (Heat & Frost)				
	Iron Worker				
	Iron Worker (Assembler, Metal Bldgs)				
	Painter & Decorator				
	Plasterer				
	Plumber				
	Residential Electrician				
	Roofer & Waterproofer				
	Sheet Metal Worker				
	Sprinklerfitter				
	Steamfitter				
	Steamfitter (Refrigeration)				
	Steamfitter (Service)				
	Taper & Finisher				
	Telecommunications (Voice, Data & Video) Installer-Technician				
	Tile Setter				

04/09/12-6815).doc E-4

NAME OF BIDDER

PROPOSAL

UNIVERSITY AVE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVE/CAMPUS DR/BREESE TERRACE INTERSECTION RECONSTRUCTION

CONTRACT NO. 6815

ITEM	TYPE OF WORK	ESTIMATED QUANTITES		UNIT PRICE BID	TOTAL BID				
STREE	STREET ACCOUNT NO. CS53-58201-810737-00-53W1351								
10701	TRAFFIC CONTROL	1.00	LS		\$				
10911	MOBILIZATION	1.00	LS		\$				
20101	EXCAVATION CUT	485.00	CY		\$				
20140	GEOTEXTILE FABRIC TYPE SAS (NON-WOVEN)	100.00	SY		\$				
20219	BREAKER RUN	330.00	TON		\$				
20221	TOPSOIL	920.00	SY		\$				
20303	SAWCUT BITUMINOUS PAVEMENT, FULL DEPTH	50.00	LF		\$				
20322	REMOVE CONCRETE CURB & GUTTER	92.00	LF		\$				
20323	REMOVE CONCRETE SIDEWALK & DRIVE	750.00	SF		\$				
20401	CLEARING	20.00	I.D.		\$				
20403	GRUBBING	20.00	I.D.		\$				
20701	TERRACE SEEDING	920.00	SY		\$				
30201	TYPE 'A' CONCRETE CURB & GUTTER	32.00	LF		\$				
30204	TYPE 'D' CONCRETE CURB & GUTTER	205.00	LF		\$				
30206	TYPE 'G' CONCRETE CURB & GUTTER	55.00	LF		\$				
30301	5" CONCRETE SIDEWALK	750.00	SF		\$				
30302	7" CONCRETE SIDEWALK AND DRIVE	400.00	SF		\$				

UNIVERSITY AVE PARKING LOT RECONSTRUCTION - 2012 AND

UNIVERSITY AVE/CAMPUS DR/BREESE TERRACE INTERSECTION RECONSTRUCTION

CONTRACT NO. 6815

ITEM	TYPE OF WORK	ESTIMATED QUANTITES		UNIT PRICE BID	TOTAL BID
40102	CRUSHED AGGREGATE BASE COURSE, GRADATION 2	260.00	TON		\$
40202	HMA PAVEMENT TYPE E-1	135.00	TON		\$
40211	BITUMINOUS TACK COAT	40.00	GAL		\$
60821	PAVEMENT MARKING EPOXY, PARKING STALL, 4" YELLOW	325.00	LF		\$
90001	MECHANICALLY STABILIZED EARTH BLOCK WALL	910.00	SF		\$
90002	REPAIR CONCRETE RETAINING WALL	50.00	SF		\$
90100	PAVEMENT MARKING EPOXY, DISABLED PARKING SYMBOL, YELLOW	1.00	EACH		\$

STREET ACCOUNT NO. CS53-58260-810358-00-53W1351

F		T	1	
10701	TRAFFIC CONTROL	1.00	LS	\$
10911	MOBILIZATION	1.00	LS	\$
20101	EXCAVATION CUT	175.00	CY	\$
20303	SAWCUT BITUMINOUS PAVEMENT, FULL DEPTH	500.00	LF	\$
20321	REMOVE CONCRETE PAVEMENT	100.00	SY	\$
20322	REMOVE CONCRETE CURB & GUTTER	170.00	LF	\$
20323	REMOVE CONCRETE SIDEWALK & DRIVE	90.00	SF	\$
21046	INLET PROTECTION TYPE D MODIFIED-PROVIDE & INSTALL	1.00	EACH	\$
21047	INLET PROTECTION TYPE D MODIFIED-MAINTAIN	1.00	EACH	\$
21048	INLET PROTECTION TYPE D MODIFIED-REMOVE	1.00	EACH	\$
30207	TYPE "H" CONCRETE CURB & GUTTER	405.00	LF	\$

UNIVERSITY AVE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVE/CAMPUS DR/BREESE TERRACE INTERSECTION RECONSTRUCTION

CONTRACT NO. 6815

ITEM	TYPE OF WORK	ESTIMATED	QUANTITES	UNIT PRICE BID	TOTAL BID
30301	5" CONCRETE SIDEWALK	100.00	SF		 \$
30301	7" CONCRETE SIDEWALK AND	100.00			
30302	DRIVE	100.00	SF		\$
	MOUNTABLE CONCRETE MEDIAN				
30311	ISLAND NOSE	220.00	SF		\$
	CURB RAMP DETECTABLE		ar.		d.
30340	WARNING FIELD	24.00	SF		\$
40102	CRUSHED AGGREGATE BASE COURSE, GRADATION 2	200.00	TON		\$
40102	COURSE, GRADATION 2	200.00	TON		Ψ
40203	HMA PAVEMENT TYPE E-3	480.00	TON		\$
40211	BITUMINOUS TACK COAT	150.00	GAL		\$
	ASPHALT MATERIAL FOR CURB				
40251	FRONT FILL	50.00	LF	AND THE STREET	\$
40301	FULL WIDTH GRINDING	1,400.00	SY		\$
,,,,,,	BASE PATCH GRINDING, METHOD				
40331	1 (UNDISTRIBUTED)	50.00	SY		\$
	BASE PATCH GRINDING, METHOD				
40333	3 (UNDISTRIBUTED)	50.00	SY		\$
	PAVEMENT MARKING EPOXY,				
60800	LINE, 4-INCH	400.00	LF	////	\$
60001	PAVEMENT MARKING EPOXY,	950.00	1		\$
60801	DOUBLE LINE, 4-INCH	850.00	LF		J .
60802	PAVEMENT MARKING EPOXY, LINE, 6-INCH	250.00	LF		\$
00802	PAVEMENT MARKING EPOXY,	230.00	1/1		
60803	LINE, 8-INCH	300.00	LF		\$
	PAVEMENT MARKING EPOXY,				
60812	CROSSWALK, 6-INCH	380.00	LF		\$
	PAVEMENT MARKING EPOXY,				
60818	STOPLINE, 24-INCH	140.00	LF		\$
	PAVEMENT MARKING EPOXY,		_,		Φ.
60822	SYMBOL, BIKE SHARROW	1.00	EACH		\$
60000	PAVEMENT MARKING EPOXY,	4.00	EACH		\$
60823	SYMBOL, BIKE LANE	4.00	EACH		φ
	PAVEMENT MARKING EPOXY, SYMBOL, BIKE LANE & STRAIGHT				
60826	ARROW	1.00	EACH		\$
	Ŧ				

UNIVERSITY AVE PARKING LOT RECONSTRUCTION - 2012 AND

UNIVERSITY AVE/CAMPUS DR/BREESE TERRACE INTERSECTION RECONSTRUCTION

CONTRACT NO. 6815

ITEM	TYPE OF WORK	ESTIMATED QUANTITES		UNIT PRICE BID	TOTAL BID
60829	PAVEMENT MARKING EPOXY, SYMBOL, LEFT ARROW	1.00	EACH		\$
60834	PAVEMENT MARKING EPOXY, WORD, ONLY	1.00	EACH		\$
60881	PAVEMENT MARKING REMOVAL, 6-INCH	60.00	LF		\$
60882	PAVEMENT MARKING REMOVAL, 8-INCH	20.00	LF		\$
90003	TEXTURED & COLORED CONCRETE SIDEWALK 5"	230.00	SF		\$

STREET ACCOUNT NO. CS53-58270-810737-00-53W1351

20501	ADJUST STORM SAS	1.00	EACH	\$
21021	SILT FENCE COMPLETE	200.00	LF	\$
21024	SILT SOCK (UNDISTRIBUTED)	300.00	LF	\$
21046	INLET PROTECTION TYPE D MODIFIED-PROVIDE & INSTALL	2.00	EACH	\$
21047	INLET PROTECTION TYPE D MODIFIED-MAINTAIN	2.00	EACH	\$
	INLET PROTECTION TYPE D		EACH	\$
21048	MODIFIED-REMOVE	2.00		
50211	SELECT BACKFILL FOR STORM	15.00	TF	\$
50401	12 INCH STORM SEWER PIPE	15.00	LF	\$
50723	3'X3' STORM SAS	1.00	EACH	\$
50741	TYPE H INLET	1.00	EACH	\$
50801	UTILITY LINE OPENING	2.00	EACH	\$
90030	CONSTRUCTION SITE TRACKING CONTROL	1.00	LS	\$
90031	BIORETENTION BASIN	1.00	LS	\$
90032	CONCRETE FLUME	1.00	EACH	\$
90033	REMOVE ACCESS STRUCTURE CASTING	1.00	EACH	\$

UNIVERSITY AVE PARKING LOT RECONSTRUCTION - 2012 AND VERSITY AVE/CAMPUS DE/PRESS TERRACE INTERSECTION RECONSTRUCTION.

UNIVERSITY AVE/CAMPUS DR/BREESE TERRACE INTERSECTION RECONSTRUCTION

CONTRACT NO. 6815

ITEM	TYPE OF WORK	ESTIMATED	QUANTITES	UNIT PRICE BID	TOTAL BID		
STRE	STREET LIGHTING ACCOUNT NO. CS53-58545-810358-00-53W1351						
	FURNISH & INSTALL 3 INCH PVC						
60222	(SCHEDULE 80) CONDUIT	40.00	L.F.		\$		
	FURNISH & INSTALL 3 INCH PVC						
60224	(SCHEDULE 40) CONDUIT	200.00	L.F.		\$		
	FURNISH & INSTALL 2 INCH PVC						
60230	(SCHEDULE 80) CONDUIT	40.00	L.F.		\$		
	FURNISH & INSTALL 2 INCH PVC						
60232	(SCHEDULE 40) CONDUIT	220.00	L.F.		\$		
	GOPHER RACEWAY FOR						
	ELECTRICAL CONDUIT OR CABLE-						
60241	IN-DUCT	150.00	L.F.		\$		
60403	CONSTRUCT LB-3 BASE	1.00	EACH		\$		
60401	DEMOVE STREET LIGHT DAGE	1.00	EACH		dr.		
60421	REMOVE STREET LIGHT BASE	1.00	EACH		\$		
60261	ELECTRICAL TRENCH	200.00	L.F.		\$		
	CONSTRUCT ELECTRICAL			***************************************			
60702	HANDHOLE TYPE I	1.00	EACH		\$		
TRAF	FIC SIGNAL ACCOUNT NO. CS53-	58545-81035	8-00-53W135	51			
	FURNISH & INSTALL 3 INCH PVC						
60224	(SCHEDULE 40) CONDUIT	10.00	L.F.		\$		
60411	CONSTRUCT TYPE "G' BASE	1.00	EACH		\$		
	CONSTRUCT ELECTRICAL				***************************************		
60702	HANDHOLE TYPE I	1.00	EACH		\$		

GRAND TOTAL			

SECTION F: BID BOND

KNOW ALL MEN BY THESE PI	RESENT, THAT	
(a corporation of the State of	(individual), (partne	ership), hereinafter referred to as
the "Principal") and	, a corporation of the State of	(hereinafter referred
to as the "Surety") and licensed to	do business in the State of Wisconsin	, are held and firmly bound unto
the City of Madison, (hereinafter	referred to as the "Obligee"), in the s	sum of five per cent (5%) of the
amount of the total bid or bids of t	he Principal herein accepted by the O	bligee, for the payment of which
the Principal and the Surety bin	d themselves, their heirs, executors,	administrators, successors and
assigns, jointly and severally, firml	y by these presents.	

The conditions of this obligation are such that, whereas the Principal has submitted, to the City of Madison a certain bid, including the related alternate, and substitute bids attached hereto and hereby made a part hereof, to enter into a contract in writing for the construction of:

UNIVERSITY AVENUE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVENUE/CAMPUS DRIVE/BREESE TERRACE INTERSECTION RECONSTRUCTION CONTRACT NO. 6815

- 1. If said bid is rejected by the Obligee, then this obligation shall be void.
- 2. If said bid is accepted by the Obligee and the Principal shall execute and deliver a contract in the form specified by the Obligee (properly completed in accordance with said bid) and shall furnish a bond for his/her faithful performance of said contract, and for the payment of all persons performing labor or furnishing materials in connection therewith, and shall in all other respects perform the agreement created by the acceptance of said bid, then this obligation shall be void.

If said bid is accepted by the Obligee and the Principal shall fail to execute and deliver the contract and the performance and payment bond noted in 2. above executed by this Surety, or other Surety approved by the City of Madison, all within the time specified or any extension thereof, the Principal and Surety agree jointly and severally to forfeit to the Obligee as liquidated damages the sum mentioned above, it being understood that the liability of the Surety for any and all claims hereunder shall in no event exceed the sum of this obligation as stated, and it is further understood that the Principal and Surety reserve the right to recover from the Obligee that portion of the forfeited sum which exceed the actual liquidated damages incurred by the Obligee.

The Surety, for value received, hereby stipulates and agrees that the obligations of said Surety and its bond shall be in no way impaired or affected by an extension of the time within which the Obligee may accept such bid, and said Surety does hereby waive notice of any such extension.

04/06/12-6815).doc F-1

IN WITNESS WHEREOF, the Principal and the Surety have hereunto set their hands and seals, and such of them as are corporations have caused their corporate seals to be hereto affixed and these presents to be signed by their proper officers, on the day and year set forth below.

Seal			
	Principal	A CONTRACTOR OF THE CONTRACTOR	Date
By:			
	Name of Surety		
By:			
			Date
	been revoked.	•	ed to above, which power of attorney
Date		Agent	
		Address	
		City, State and Zip Code	
		Telephone Number	

NOTE TO SURETY & PRINCIPAL

The bid submitted which this bond guarantees may be rejected if the following instrument is not attached to this bond:

Power of Attorney showing that the agent of Surety is currently authorized to execute bonds on behalf of the Surety, and in the amounts referenced above.

Certificate of Biennial Bid Bond

TIME PERIOD - VALID (FROM/TO)	
NAME OF SURETY	
NAME OF CONTRACTOR	
CERTIFICATE HOLDER	
	City of Madison, Wisconsin
This is to certify that a biennial bid City of Madison.	bond issued by the above-named Surety is currently on file with the
This certificate is issued as a matter does not amend, extend or alter the co	of information and conveys no rights upon the certificate holder and overage of the biennial bid bond.
Cancellation: Should the above police thirty (30) days written notice to the	y be cancelled before the expiration date, the issuing Surety will give certificate holder indicated above.
	Signature of Authorized Contractor Representative
	Date

F-3

04/06/12-6815).doc

SECTION G: AGREEMENT

THIS Twelve Madiso	AGREEMENT made this day of in the year Two Thousand and the between hereinafter called the Contractor, and the City of on, Wisconsin, hereinafter called the City.
adopte	REAS, the Common Council of the said City of Madison under the provisions of a resolution d, and by virtue of authority vested in the said Council, has ed to the Contractor the work of performing certain construction.
NOW, follows	THEREFORE, the Contractor and the City, for the consideration hereinafter named, agree as s:
1.	Scope of Work. The Contractor shall, perform the construction, execution and completion of the following listed complete work or improvement in full compliance with the Plans, Specifications, Standard Specifications, Supplemental Specifications, Special Provisions and contract; perform all items of work covered or stipulated in the proposal; perform all altered or extra work; and shall furnish, unless otherwise provided in the contract, all materials, implements, machinery, equipment, tools, supplies, transportation, and labor necessary to the prosecution and completion of the work or improvements:
UI	UNIVERSITY AVENUE PARKING LOT RECONSTRUCTION - 2012 AND NIVERSITY AVENUE/CAMPUS DRIVE/BREESE TERRACE INTERSECTION RECONSTRUCTION CONTRACT NO. 6815
2.	Completion Date/Contract Time. Construction work must begin within seven (7) calendar days after the date appearing on mailed written notice to do so shall have been sent to the Contractor and shall be carried on at a rate so as to secure full completion <u>SEE SPECIAL PROVISIONS</u> , the rate of progress and the time of completion being essential conditions of this Agreement.
3.	Contract Price. The City shall pay to the Contractor at the times, in the manner and on the conditions set forth in said specifications, the sum of(\$) Dollars being the amount bid by such Contractor and which was awarded to him/her as provided by law.
4.	Wage Rates for Employees of Public Works Contractors
	General and Authorization. The Contractor shall compensate its employees at the prevailing wage rate in accordance with section 66.0903, Wis. Stats., DWD 290 of the Wisconsin Administrative Code and as hereinafter provided.
	"Public Works" shall include building or work involving the erection, construction, remodeling, repairing or demolition of buildings, parking lots, highways, streets, bridges, sidewalks, street lighting, traffic signals, sanitary sewers, water mains and appurtenances, storm sewers, and the grading and landscaping of public lands.
	"Building or work" includes construction activity as distinguished from manufacturing, furnishing of materials, or servicing and maintenance work, except for the delivery of mineral aggregate such as sand, gravel, bituminous asphaltic concrete or stone which is incorporated into

04/06/12-6815).doc G-1

the work under contract with the City by depositing the material directly in final place from transporting vehicle.

"Erection, construction, remodeling, repairing" means all types of work done on a particular building or work at the site thereof in the construction or development of the project, including without limitation, erecting, construction, remodeling, repairing, altering, painting, and decorating, the transporting of materials and supplies to or from the building or work done by the employees of the Contractor, Subcontractor, or Agent thereof, and the manufacturing or furnishing of materials, articles, supplies or equipment on the site of the building or work, by persons employed by the Contractor, Subcontractor, or Agent thereof.

"Employees working on the project" means laborers, workers, and mechanics employed directly upon the site of work.

"Laborers, Workers, and Mechanics" include preapprentices, helpers, trainees, learners and properly registered and indentured apprentices but exclude clerical, supervisory, and other personnel not performing manual labor.

Establishment of Wage Rates. The Department of Public Works shall periodically obtain a current schedule of prevailing wage rates from DWD. The schedule shall be used to establish the City of Madison Prevailing Wage Rate Schedule for Public Works Construction (prevailing wage rate). The Department of Public Works may include known increases to the prevailing wage rate which can be documented and are to occur on a future specific date. The prevailing wage rate shall be included in public works contracts subsequently negotiated or solicited by the City. Except for known increases contained within the schedule, the prevailing wage rate shall not change during the contract. The approved wage rate is attached hereto.

Workforce Profile. The Contractor shall, at the time of signature of the contract, notify the City Engineer in writing of the names and classifications of all the employees of the Contractor, Subcontractors, and Agents proposed for the work. In the alternative, the Contractor shall submit in writing the classifications of all the employees of the Contractor, Subcontractors and Agents and the total number of hours estimated in each classification for the work. This workforce profile(s) shall be reviewed by the City Engineer who may, within ten (10) days, object to the workforce profile(s) as not being reflective of that which would be required for the work. The Contractor may request that the workforce profile, or a portion of the workforce profile, be submitted after the signature of the contract but at least ten (10) days prior to the work commencing. Any costs or time loss resulting from modifications to the workforce profile as a result of the City Engineer's objections shall be the responsibility of the Contractor.

Payrolls and Records. The Contractor shall keep weekly payroll records setting forth the name, address, telephone number, classification, wage rate and fringe benefit package of all the employees who work on the contract, including the employees of the Contractor's subcontractors and agents. Such weekly payroll records must include the required information for all City contracts and all other contracts on which the employee worked during the week in which the employee worked on the contract. The Contractor shall also keep records of the individual time each employee worked on the project and for each day of the project. Such records shall also set forth the total number of hours of overtime credited to each such employee for each day and week and the amount of overtime pay received in that week. The records shall set forth the full weekly wages earned by each employee and the actual hourly wage paid to the employee.

The Contractor shall submit the weekly payroll records, including the records of the Contractor's subcontractors and agents, to the City Engineer for every week that work is being done on the

04/06/12-6815).doc G-2

contract. The submittal shall be within twenty-one (21) calendar days of the end of the Contractor's weekly pay period.

Employees shall receive the full amounts accrued at the time of the payment, computed at rates not less than those stated in the prevailing wage rate and each employee's rate shall be determined by the work that is done within the trade or occupation classification which should be properly assigned to the employee.

An employee's classification shall not be changed to a classification of a lesser rate during the contract. If, during the term of the contract, an employee works in a higher pay classification than the one which was previously properly assigned to the employee, then that employee shall be considered to be in the higher pay classification for the balance of the contract, receive the appropriate higher rate of pay, and she/he shall not receive a lesser rate during the balance of the contract. For purposes of clarification, it is noted that there is a distinct difference between working in a different classification with higher pay and doing work within a classification that has varying rates of pay which are determined by the type of work that is done within the classification. For example, the classification "Operating Engineer" provides for different rates of pay for various classes of work and the Employer shall compensate an employee classified as an "Operating Engineer" based on the highest class of work that is done in one day. Therefore, an "Operating Engineer's" rate may vary on a day to day basis depending on the type of work that is done, but it will never be less than the base rate of an "Operating Engineer". Also, as a matter of clarification, it is recognized that an employee may work in a higher paying classification merely by chance and without prior intention, calculation or design. If such is the case and the performance of the work is truly incidental and the occurrence is infrequent, inconsequential and does not serve to undermine the single classification principle herein, then it may not be required that the employee be considered to be in the higher pay classification and receive the higher rate of pay for the duration of the contract. However, the Contractor is not precluded or prevented from paying the higher rate for the limited time that an employee performs work that is outside of the employee's proper classification.

Questions regarding an employee's classification, rate of pay or rate of pay within a classification, shall be resolved by reference to the established practice that predominates in the industry and on which the trade or occupation rate/classification is based. Rate of pay and classification disputes shall be resolved by relying upon practices established by collective bargaining agreements and guidelines used in such determination by appropriate recognized trade unions operating within the City of Madison.

The Contractor, its Subcontractors and Agents shall submit to interrogation regarding compliance with the provisions of this ordinance.

Mulcting of the employees by the Contractor, Subcontractor, and Agents on Public Works contracts, such as by kickbacks or other devices, is prohibited. The normal rate of wage of the employees of the Contractor, Subcontractor, and Agents shall not be reduced or otherwise diminished as a result of payment of the prevailing wage rate on a public works contract.

Hourly contributions. Hourly contributions shall be determined in accordance with the prevailing wage rate and with DWD. 290.01(10), Wis. Admin. Code.

Apprentices and Subjourneypersons. Apprentices and subjourneypersons performing work on the project shall be compensated in accordance with the prevailing wage rate and with DWD 290.02, and 290.025, respectively, Wis. Admin. Code.

04/06/12-6815),doc G-3

Straight Time Wages. The Contractor may pay straight time wages as determined by the prevailing wage rate and DWD 290.04, Wis. Admin. Code.

Overtime Wages. The Contractor shall pay overtime wages as required by the prevailing wage rate and DWD 290.05, Wis. Admin. Code.

Posting of Wage Rates and Hours. A clearly legible copy of the prevailing wage rate, together with the provisions of Sec. 66.0903(10)(a) and (11)(a), Wis. Stats., shall be kept posted in at least one conspicuous and easily accessible place at the project site by the Contractor and such notice shall remain posted during the full time any laborers, workers or mechanics are employed on the contract.

Evidence of Compliance by Contractor. Upon completion of the contract, the Contractor shall file with the Department of Public Works an affidavit stating:

- a. That the Contractor has complied fully with the provisions and requirements of Sec. 66.0903(3), Wis. Stats., and Chapter DWD 290, Wis. Admin. Code; the Contractor has received evidence of compliance from each of the agents and subcontractors; and the names and addresses of all of the subcontractors and agents who worked on the contract.
- b. That full and accurate records have been kept, which clearly indicate the name and trade or occupation of every laborer, worker or mechanic employed by the Contractor in connection with work on the project. The records shall show the number of hours worked by each employee and the actual wages paid therefor; where these records will be kept and the name, address and telephone number of the person who will be responsible for keeping them. The records shall be retained and made available for a period of at least three (3) years following the completion of the project of public works and shall not be removed without prior notification to the municipality.

Evidence of Compliance by Agent and Subcontractor. Each agent and subcontractor shall file with the Contractor, upon completion of their portion of the work on the contract an affidavit stating that all the provisions of Sec. 66.0903(3), Wis. Stats., have been fully complied with and that full and accurate records have been kept, which clearly indicate the name and trade or occupation of every laborer, worker or mechanic employed by the Contractor in connection with work on the project. The records shall show the number of hours worked by each employee and the actual wages paid therefor; where these records shall be kept and the name, address and telephone number of the person who shall be responsible for keeping them. The records shall be retained and made available for a period of at least three (3) years following the completion of the project of public works and shall not be removed without prior notification to the municipality.

Failure to Comply with the Prevailing Wage Rate. If the Contractor fails to comply with the prevailing wage rate, she/he shall be in default on the contract.

5. **Affirmative Action.** In the performance of the services under this Agreement the Contractor agrees not to discriminate against any employee or applicant because of race, religion, marital status, age, color, sex, disability, national origin or ancestry, income level or source of income, arrest record or conviction record, less than honorable discharge, physical appearance, sexual orientation, political beliefs, or student status. The Contractor further agrees not to discriminate against any subcontractor or person who offers to subcontract on this contract because of race, religion, color, age, disability, sex or national origin.

04/06/12-6815).doc G-4

The Contractor agrees that within thirty (30) days after the effective date of this agreement, the Contractor will provide to the City Affirmative Action Division certain workforce utilization statistics, using a form to be furnished by the City.

If the contract is still in effect, or if the City enters into a new agreement with the Contractor, within one year after the date on which the form was required to be provided, the Contractor will provide updated workforce information using a second form, also to be furnished by the City. The second form will be submitted to the City Affirmative Action Division no later than one year after the date on which the first form was required to be provided.

The Contractor further agrees that, for at least twelve (12) months after the effective date of this contract, it will notify the City Affirmative Action Division of each of its job openings at facilities in Dane County for which applicants not already employees of the Contractor are to be considered. The notice will include a job description, classification, qualifications and application procedures and deadlines. The Contractor agrees to interview and consider candidates referred by the Affirmative Action Division if the candidate meets the minimum qualification standards established by the Contractor, and if the referral is timely. A referral is timely if it is received by the Contractor on or before the date started in the notice.

Articles of Agreement Article I

The Contractor shall take affirmative action in accordance with the provisions of this contract to insure that applicants are employed, and that employees are treated during employment without regard to race, religion, color, age, marital status, disability, sex or national original and that the employer shall provide harassment free work environment for the realization of the potential of each employee. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer, recruitment or recruitment advertising, layoff or termination, rates of pay or other forms of compensation and selection for training including apprenticeship insofar as it is within the control of the Contractor. The Contractor agrees to post in conspicuous places available to employees and applicants notices to be provided by the City setting out the provisions of the nondiscrimination clauses in this contract.

Article II

The Contractor shall in all solicitations or advertisements for employees placed by or on behalf of the Contractors state that all qualified or qualifiable applicants will be employed without regard to race, religion, color, age, marital status, disability, sex or national origin.

Article III

The Contractor shall send to each labor union or representative of workers with which it has a collective bargaining agreement or other contract or understanding a notice to be provided by the City advising the labor union or worker's representative of the Contractor's equal employment opportunity and affirmative action commitments. Such notices shall be posted in conspicuous places available to employees and applicants for employment.

Article V

The Contractor agrees that it will comply with all provisions of the Affirmative Action Ordinance of the City of Madison, including the contract compliance requirements. The Contractor agrees to

04/06/12-6815),doc G-5

submit the model affirmative action plan for public works contractors in a form approved by the Director of Affirmative Action.

Article VI

The Contractor will maintain records as required by Section 39.02(9)(f) of the Madison General Ordinances and will provide the City Affirmative Action Division with access to such records and to persons who have relevant and necessary information, as provided in Section 39.02(9)(f). The City agrees to keep all such records confidential, except to the extent that public inspection is required by law.

Article VII

In the event of the Contractor's or subcontractor's failure to comply with the Equal Employment Opportunity and Affirmative Action Provisions of this contract or Section 39.03 and 39.02 of the Madison General Ordinances, it is agreed that the City at its option may do any or all of the following:

- 1. Cancel, terminate or suspend this Contract in whole or in part.
- 2. Declare the Contractor ineligible for further City contracts until the Affirmative Action requirements are met.
- 3. Recover on behalf of the City from the prime Contractor 0.5 percent of the contract award price for each week that such party fails or refuses to comply, in the nature of liquidated damages, but not to exceed a total of five percent (5%) of the contract price, or five thousand dollars (\$5,000), whichever is less. Under public works contracts, if a subcontractor is in noncompliance, the City may recover liquidated damages from the prime Contractor in the manner described above. The preceding sentence shall not be construed to prohibit a prime Contractor from recovering the amount of such damage from the non-complying subcontractor.

Article VIII

The Contractor shall include the above provisions of this contract in every subcontract so that such provisions will be binding upon each subcontractor. The Contractor shall take such action with respect to any subcontractor as necessary to enforce such provisions, including sanctions provided for noncompliance.

Article IX

G-6

The Contractor shall allow the maximum feasible opportunity to small business enterprises to compete for any subcontracts entered into pursuant to this contract.

UNIVERSITY AVENUE PARKING LOT RECONSTRUCTION - 2012 AND UNIVERSITY AVENUE/CAMPUS DRIVE/BREESE TERRACE INTERSECTION RECONSTRUCTION CONTRACT NO. 6815

IN WITNESS WHEREOF, the Contractor has hereunto set his/her hand and seal and the City has caused these presents to be sealed with its corporate seal and to be subscribed by its Mayor and City Clerk the day and year first above written.

Witness Date Witness Date CITY OF MADISON, WISCONSIN Provisions have been made to pay the liability that will accrue under this contract. Finance Director Signed this day of				
		Company Name		
Witness	Date	President		Date
Witness	Date	Secretary		Date
CITY OF MADISON, WISCON	ISIN			
		Approved as to form:		
Finance Director	<u> </u>	City Attorney		
Signed this	day of		, 20	
Witness		Mayor		Date
Witness		City Clerk		Date

SECTION H: PAYMENT AND PERFORMANCE BOND

KNOW ALL MEN BY THESE PRESENTS, that we _	
as principal, andas some states of which sum to the C.	water are held and firmly having vinto the City of
Company ofas si	(\$) Dollars lawful money of the
United States, for the payment of which sum to the C	ity of Madison, we hereby hind ourselves and our
respective executors and administrators firmly by these	
respective executors and administrators in my by these	presents.
The condition of this Bond is such that if the above perform all of the terms of the Contract entered into be construction of:	
UNIVERSITY AVENUE PARKING L AND	
UNIVERSITY AVENUE/CAMPUS DRIVE/	
RECONSTR	UCTION
CONTRACT	NO. 6815
in Madison, Wisconsin, and shall pay all claims for prosecution of said work, and save the City harmless f in the prosecution of said work, and shall save harmle (under Chapter 102, Wisconsin Statutes) of employees to be void, otherwise of full force, virtue and effect.	From all claims for damages because of negligence ess the said City from all claims for compensation
Signed and sealed thisday of	·
Countersigned:	
Countersigned.	Company Name (Principal)
	Company Name (Finespar)
Witness	President Seal
2	
Secretary	
Approved as to form:	
ipproved as to form.	Surety Seal
	Salary Employee Commission
	Ву
City Attorney	Attorney-in-Fact
	Continue de la continue de la William de la continue de la continu
This certifies that I have been duly licensed as an ag	
License No for the year 20_ authority to execute this payment and performance bond	, and appointed as attorney-in-fact with
admortly to execute this payment and performance bond	a which power of attorney has not been revoked.
Date	Agent

04/06/12-6815).doc H-1

MINIMUM WAGE SCALE

FOR

PUBLIC WORKS IMPROVEMENTS

APPROVED BY: BOARD OF PUBLIC WORKS

MADISON, WISCONSIN

February 7, 2012

The attached "Prevailing Wage Rate Determination: (Pages 1 through 30), issued February 7, 2012, is hereby approved as the Minimum Wage Scale of the City of Madison.

State of Wisconsin Department of Workforce Development Equal Rights Division

DEPARTMENTAL ORDER

ISSUE DATE: 1/13/2012

PROJECT:

ALL PUBLIC WORKS PROJECTS UNDER SEC 66.0903, STATS - CITY OF MADISON MADISON CITY, DANE COUNTY, WI Determination No. 201200105

PROJECT OWNER:	REQUESTER:
ROBERT F. PHILLIPS, CITY ENGINEER CITY OF MADISON-ENGINEERING 210 MARTIN L KING JR BLVD, RM 115 MADISON, WI 53703	ROBERT F. PHILLIPS, CITY ENGINEER CITY OF MADISON-ENGINEERING 210 MARTIN L KING JR BLVD, RM 115 MADISON, WI 53703
ADDITIONAL CONTACT:	
NORMAN DAVIS, CONTRACT COMPLIANCE CITY OF MADISON-DEPT OF CIVIL RTS-AA DIV 210 MARTIN L KING JR BLVD, RM 523 MADISON, WI 537033342	·

The department received an application for prevailing wage rate determination for the above-captioned project. The department conducted a survey to determine the prevailing wage rate for the trade(s) or occupation(s) needed to complete the project. The survey's findings appear in the attached project determination.

If you believe that the wage rate for any trade or occupation does not accurately reflect the prevailing wage rate in the city, village or town where the project is located, you may ask the department to conduct an administrative review of such wage rate. You must submit this request in writing within 30 days from the date indicated above. Additionally, your request must include wage rate information from at least three similar projects in the city, village or town where the proposed project is located and on which some work has been performed by the contested trade(s) during the current survey period and was previously considered by the department in issuing the attached determination. See DWD 290.10 of the Wisconsin Administrative Code and either s. 66.0903(3)(br), s. 66.0904(4)(e), or s. 103.49(3)(c), Stats., for a complete explanation of the administrative review process.

Enclosures

It is hereby ordered that the prevailing wage rates set forth in the attached project determination shall only be applicable to the above referenced project. This order is a **FINAL ORDER** of the department unless a timely request for an administrative review is filed with the department.

ISSUED BY:

Equal Rights Division
Labor Standards Bureau
Construction Wage Standards Section
PO Box 8928 Madison, WI 53708-8928
(608)266-6861

Web Site: http://dwd.wisconsin.gov/er/

PREVAILING WAGE RATE DETERMINATION
Issued by the State of Wisconsin
Department of Workforce Development
Pursuant to s. 66.0903, Wis. Stats.
Issued On: 1/13/2012

DETERMINATION NU	MBER: 201200105
EXPIRATION DATE:	Prime Contracts MUST Be Awarded or Negotiated On Or Before 12/31/2012. If NOT, You MUST Reapply.
PROJECT NAME:	ALL PUBLIC WORKS PROJECTS UNDER SEC 66.0903, STATSCITY OF MADISON
PROJECT LOCATION	: MADISON CITY, DANE COUNTY, WI
CONTRACTING AGE	NCY: CITY OF MADISON-ENGINEERING
CLASSIFICATION:	Contractors are responsible for correctly classifying their workers. Either call the Department of Workforce Development (DWD) with trade or classification questions or consult DWD's Dictionary of Occupational Classifications & Work Descriptions on the DWD website at: dwd.wisconsin.gov/er/prevailing_wage_rate/Dictionary/dictionary_main.htm.
OVERTIME:	Time and one-half must be paid for all hours worked: over 10 hours per day on prevailing wage projects over 40 hours per calendar week Saturday and Sunday on all of the following holidays: January 1; the last Monday in May; July 4; the 1st Monday in September; the 4th Thursday in November; December 25; The day before if January 1, July 4 or December 25 falls on a Saturday; The day following if January 1, July 4 or December 25 falls on a Sunday. Apply the time and one-half overtime calculation to whichever is higher between the Hourly Basic Rate listed on this project determination or the employee's regular hourly rate of pay. Add any applicable Premium or DOT Premium to the Hourly Basic Rate before calculating overtime. A DOT Premium (discussed below) may supersede this time and one-half requirement.
FUTURE INCREASE:	When a specific trade or occupation requires a future increase, you MUST add the full hourly increase to the "TOTAL" on the effective date(s) indicated for the specific trade or occupation.
PREMIUM PAY:	If indicated for a specific trade or occupation, the full amount of such pay MUST be added to the "HOURLY BASIC RATE OF PAY" indicated for such trade or occupation, whevenever such pay is applicable.
DOT PREMIUM:	This premium only applies to highway and bridge projects owned by the Wisconsin Department of Transportation and to the project type heading "Airport Pavement or State Highway Construction." DO NOT apply the premium calculation under any other project type on this determination.
APPRENTICES:	Pay apprentices a percentage of the applicable journeyperson's hourly basic rate of pay and hourly fringe benefit contributions specified in this determination. Obtain the appropriate percentage from each apprentice's contract or indenture.
SUBJOURNEY:	Subjourney wage rates may be available for some of the trades or occupations indicated below with the exception of laborers, truck drivers and heavy equipment operators. Any employer interested in using a subjourney classification on this project MUST complete Form ERD-10880 and request the applicable wage rate from the Department of Workforce Development PRIOR to using the subjourney worker on this project.

This document MUST BE POSTED by the CONTRACTING AGENCY in at least one conspicuous and easily accessible place on the site of the project. A local governmental unit may post this document at the place normally used to post public notices if there is no common site on the project. This document MUST remain posted during the entire time any worker is employed on the project and MUST be physically incorporated into the specifications and all contracts and subcontracts. If you have any questions, please write to the Equal Rights Division, Labor Standards Bureau, P.O. Box 8928, Madison, Wisconsin 53708 or call (608) 266-6861.

The following statutory provisions apply to local governmental unit projects of public works and are set forth below pursuant to the requirements of s. 66.0903(8), Stats.

- s. 66.0903 (1) (f) & s. 103.49 (1) (c) "PREVAILING HOURS OF LABOR" for any trade or occupation in any area means 10 hours per day and 40 hours per week and may not include any hours worked on a Saturday or Sunday or on any of the following holidays:
 - 1. January 1.
 - 2. The last Monday in May.
 - 3. July 4.
 - 4. The first Monday in September.
 - 5. The 4th Thursday in November.
 - 6. December 25.
 - 7. The day before if January 1, July 4 or December 25 falls on a Saturday.
 - 8. The day following if January 1, July 4 or December 25 fails on a Sunday.

s. 66.0903 (10) RECORDS; INSPECTION; ENFORCEMENT.

(a) Each contractor, subcontractor, or contractor's or subcontractor's agent performing work on a project of public works that is subject to this section shall keep full and accurate records clearly indicating the name and trade or occupation of every person performing the work described in sub. (4) and an accurate record of the number of hours worked by each of those persons and the actual wages paid for the hours worked.

s. 66.0903 (11) LIABILITY AND PENALTIES.

- (a) 1. Any contractor, subcontractor, or contractor's or subcontractor's agent who fails to pay the prevailing wage rate determined by the department under sub. (3) or who pays less than 1.5 times the hourly basic rate of pay for all hours worked in excess of the prevailing hours of labor is liable to any affected employee in the amount of his or her unpaid wages or his or her unpaid overtime compensation and in an additional amount as liquidated damages as provided under subd. 2., 3., whichever is applicable.
- 2. If the department determines upon inspection under sub. (10) (b) or (c) that a contractor, subcontractor, or contractor's or subcontractor's agent has failed to pay the prevailing wage rate determined by the department under sub. (3) or has paid less than 1.5 times the hourly basic rate of pay for all hours worked in excess of the prevailing hours of labor, the department shall order the contractor to pay to any affected employee the amount of his or her unpaid wages or his or her unpaid overtime compensation and an additional amount equal to 100 percent of the amount of those unpaid wages or that unpaid overtime compensation as liquidated damages within a period specified by the department in the order.
- 3. In addition to or in lieu of recovering the liability specified in subd. 1. as provided in subd. 2., any employee for and in behalf of that employee and other employees similarly situated may commence an action to recover that liability in any court of competent jurisdiction. If the court finds that a contractor, subcontractor, or contractor's or subcontractor's agent has failed to pay the prevailing wage rate determined by the department under sub. (3) or has paid less than 1.5 times the hourly basic rate of pay for all hours worked in excess of the prevailing hours of labor, the court shall order the contractor, subcontractor, or agent to pay to any affected employee the amount of his or her unpaid wages or his or her unpaid overtime compensation and an additional amount equal to 100 percent of the amount of those unpaid wages or that unpaid overtime compensation as liquidated damages. 5. No employee may be a party plaintiff to an action under subd. 3. unless the employee consents in writing to become a party
- 5. No employee may be a party plaintiff to an action under subd. 3. unless the employee consents in writing to become a party and the consent is filed in the court in which the action is brought. Notwithstanding s. 814.04 (1), the court shall, in addition to any judgment awarded to the plaintiff, allow reasonable attorney fees and costs to be paid by the defendant.

BUILDING OR HEAVY CONSTRUCTION

Includes sheltered enclosures with walk-in access for the purpose of housing persons, employees, machinery, equipment or supplies and non-sheltered work such as canals, dams, dikes, reservoirs, storage tanks, etc. A sheltered enclosure need not be "habitable" in order to be considered a building. The installation of machinery and/or equipment, both above and below grade level, does not change a project's character as a building. On-site grading, utility work and landscaping are included within this definition. Residential buildings of four (4) stories or less, agricultural buildings, parking lots and driveways are NOT included within this definition.

	SKILLED TRADES				
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL	
101	Acoustic Ceiling Tile Installer	29.06	15.16	44.22	
102	Boilermaker	31.09	23.75	54.84	
103	Bricklayer, Blocklayer or Stonemason Future Increase(s): Add \$.50/hr on 6/1/2012; Add \$.80 on 6/1/2013 Premium Increase(s): DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.	32.26	16.60	48.86	
104	Cabinet Installer	29.06	15.16	44.22	
105	Carpenter	29.06	15.16	44.22	
106	Carpet Layer or Soft Floor Coverer	29.06	15.16	44.22	
107	Cement Finisher	32.03	15.13	47.16	
108	Drywall Taper or Finisher	26.10	13.65	39.75	
109	Electrician Future Increase(s): Add \$.50/hr on 6/1/2012. Premium Increase(s): DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.	32.55	18.68	51.23	
110	Elevator Constructor	43.79	25.48	69.27	
111	Fence Erector	25.50	0.26	25.76	
112	Fire Sprinkler Fitter	36.39	16.75	53.14	
113	Glazier	36.23	11.22	47.45	
114	Heat or Frost Insulator	33,28	22.51	55.79	
115	Insulator (Batt or Blown)	23.62	11.55	35.17	
116	Ironworker	30.90	19.11	50.01	
117·	Lather	29.06	15.16	44.22	

CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL
118	Line Constructor (Electrical)	35.97	18.08	54.05
119	Marble Finisher	31.16	16.27	47.43
120	Marble Mason	32.66	16.20	48.86
121	Metal Building Erector	22.00	4.11	26.11
122	Millwright	30.66	15.21	45.87
123	Overhead Door Installer	18.00	4.86	22.86
124	Painter	25.65	14.11	39.76
125	Pavement Marking Operator	26.00	0.00	26.00
126	Piledriver	29.56	15.16	44.72
127	Pipeline Fuser or Welder (Gas or Utility)	29.54	18.84	48.38
129	Plasterer	29.03	15.16	44.19
130	Plumber	36.20	15.02	51.22
132	Refrigeration Mechanic Future Increase(s): Add \$.85/hr on 12/1/11; Add \$.90/hr on 6/1/12; Add \$.85/hr on 12/1/12.	40.35	16.21	56.56
133	Roofer or Waterproofer	28.06	0.00	28.06
134	Sheet Metal Worker	34.23	20,19	54.42
135	Steamfitter Future Increase(s): Add \$.85/hr on 12/1/11; Add \$.90/hr on 6/1/12; Add \$.85/hr on 12/1/12.	40,35	16.21	56.56
137	Teledata Technician or Installer	21.26	6.99	28.25
138	Temperature Control Installer	32.55	18.68	51.23
139	Terrazzo Finisher	18.00	5.35	23.35
140	Terrazzo Mechanic	31.16	16.27	47.43
141	Tile Finisher Future Increase(s): Add \$.50/hr on 6/1/2012; Add \$.80/hr on 6/1/2013.	23.77	16.00	39.77
142	Tile Setter Future Increase(s): Add \$.50/hr on 6/1/2012; Add \$.80/hr on 6/1/2013.	29.71	16.00	45.71
143	Tuckpointer, Caulker or Cleaner	22.00	9.75	31.75
144	Underwater Diver (Except on Great Lakes)	36.20	18.81	55.01
146	Well Driller or Pump Installer	25.32	15.30	40.62

Page	5	of	30

Determination	No	201	120	Λ1	N5
Determination	140.	ZU	20	U I	vv

	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked	HOURLY	HOURLY	
CODE	TRADE OR OCCUPATION	BASIC RATE OF PAY \$	FRINGE BENEFITS \$	TOTAL \$
147	Siding Installer	16.74	2.58	19.32
150	Heavy Equipment Operator - ELECTRICAL LINE CONSTRUCTION ONLY	32.37	16.48	48.85
151	Light Equipment Operator -ELECTRICAL LINE CONSTRUCTION ONLY	28.78	15.16	43.94
152	Heavy Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	17.80	9.00	26.80
153	Light Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	23.38	12.48	35.86
154	Groundman - ELECTRICAL LINE CONSTRUCTION ONLY	21.30	10.97	32.27
	TRUCK DRIVERS			
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS	TOTAL \$
201	Single Axle or Two Axle	18.00	6.98	24.98
203	Three or More Axle Future Increase(s): Add \$1.57/hr on 6/1/2012.	18.00	13.83	31.83
204	Articulated, Euclid, Dumptor, Off Road Material Hauler Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.	31.89	17.98	49.87
205	Pavement Marking Vehicle	19.25	10.84	30.09
207	Truck Mechanic	18.00	13.68	31.68
	LABORERS			
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
	General Laborer Future Increase(s): Add \$.50/hr. on 06/04/2012; Add \$.75/hr. on 06/03/2013 Premium Increase(s): Add \$1.00/hr for certified welder; Add \$.25/hr for mason tender	24.14	13.45	37.59
02	Asbestos Abatement Worker	23.96	12.88	36.84
03	Landscaper	17.00	6.36	23;36
10	Gas or Utility Pipeline Laborer (Other Than Sewer and Water)	20.39	12.20	32.59
11	Fiber Optic Laborer (Outside, Other Than Concrete Encased)	16.51	0.00	16.51
14	Railroad Track Laborer	14.00	4.77	18.77

HEAVY EQUIPMENT OPERATORS SITE PREPARATION, UTILITY OR LANDSCAPING WORK ONLY

				•
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
501	Air Track, Rotary or Percussion Drilling Machine &/or Hammers, Blaster; Asphalt Milling Machine; Boring Machine (Directional, Horizontal or Vertical); Backhoe (Track Type) Having a Mfgr's Rated Capacity of 130,000 Lbs. or Over; Backhoe (Track Type) Having a Mfgr's Rated Capacity of Under 130,000 Lbs., Backhoe (Mini, 15,000 Lbs. & Under); Bulldozer or Endloader (Over 40 hp); Compactor (Self-Propelled 85 Ft Total Drum Width & Over, or Tractor Mounted, Towed & Light Equipment); Concrete Batch Plant, Batch Hopper; Concrete Breaker (Large, Auto, Vibratory/Sonic, Manual or Remote); Crane, Shovel, Dragline, Clamshells; Forklift (Machinery Moving or Steel Erection, 25 Ft & Over); Gradall (Cruz-Aire Type); Grader or Motor Patrol; Master Mechanic; Mechanic or Welder; Robotic Tool Carrier (With or Without Attachments); Scraper (Self Propelled or Tractor Drawn) 5 cu yds or More Capacity; Tractor or Truck Mounted Hydraulic Backhoe; Tractor or Truck Mounted Hydraulic Crane (10 Tons or Under); Tractor (Scraper, Dozer, Pusher, Loader); Trencher (Wheel Type or Chain Type Having Over 8 Inch Bucket). Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.	32,42	17.98	50.40
502	Backfiller; Broom or Sweeper; Bulldozer or Endloader (Under 40 hp); Environmental Burner; Forestry Equipment, Timbco, Tree Shear, Tub Grinder, Processor; Jeep Digger; Screed (Milling Machine); Skid Rig; Straddle Carrier or Travel Lift; Stump Chipper; Trencher (Wheel Type or Chain Type Having 8 Inch Bucket & Under).	31,89	14.44	46.33
503	Air Compressor (&/or 400 CFM or Over); Augers (Vertical & Horizontal); Compactor (Self-Propelled 84 Ft Total Drum Width & Under, or Tractor Mounted, Towed & Light Equipment); Crusher, Screening or Wash Plant; Farm or Industrial Type Tractor; Forklift; Generator (&/or 150 KW or Over); Greaser; High Pressure Utility Locating Machine (Daylighting Machine); Mulcher; Oiler; Post Hole Digger or Driver; Pump (3 Inch or Over) or Well Points; Refrigeration Plant or Freeze Machine; Rock, Stone Breaker; Skid Steer Loader (With or Without Attachments); Vibratory Hammer or Extractor, Power Pack. Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.	31,89	17.98	49,87
504	Work Performed on the Great Lakes Including Diver; Wet Tender or Hydraulic Dredge Engineer.	36.20	18.81	55.01
505	Work Performed on the Great Lakes Including Crane or Backhoe Operator; Assistant Hydraulic Dredge Engineer; Hydraulic Dredge Leverman or Diver's Tender; Mechanic or Welder; 70 Ton & Over Tug Operator. Premium Increase(s):	37.45	19.45	56.90

Premium Increase(s):
Add \$.50/hr for friction crane, lattice boom or crane certification (CCO).

	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked	HOURLY	HOURLY	
CODE	TRADE OR OCCUPATION	BASIC RATE OF PAY \$	FRINGE BENEFITS \$	<u>TOTAL</u> \$
506	Work Performed on the Great Lakes Including Deck Equipment Operator or Machineryman (Maintains Cranes Over 50 Tons or Backhoes 115,000 Lbs. or More); Tug, Launch or Loader, Dozer or Like Equipment When Operated on a Barge, Breakwater Wall, Slip, Dock or Scow, Deck Machinery.	26.80	18.52	45.32
507	Work Performed on the Great Lakes Including Deck Equipment Operator, Machineryman or Fireman (Operates 4 Units or More or Maintains Cranes 50 Tons or Under or Backhoes 115,000 Lbs. or Under); Deck Hand, Deck Engineer or Assistant Tug Operator; Off Road Trucks - Great Lakes ONLY.	27.75	19.15	46.90
	HEAVY EQUIPMENT OPERATORS EXCLUDING SITE PREPARATION, UTILITY, PAVING LA	ANDSCAPING W	/ORK	
	Fringe Benefits Must Be Paid On All Hours Worked	HOURLY	HOURLY	
CODE	TRADE OR OCCUPATION	BASIC RATE OF PAY \$	FRINGE <u>BENEFITS</u> \$	TOTAL \$
508	Boring Machine (Directional); Crane, Tower Crane, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of Over 100 Tons, Self-Erecting Tower Crane With a Lifting Capacity of Over 4,000 Lbs., Crane With Boom Dollies; Crane, Tower Crane, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 176 Ft or Over; Master Mechanic. Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013. Premium Increase(s): Add \$.50/hr at 200 ton: Add \$1.00/hr, at 300 ton; Add \$1.50/hr at 400 ton; Add \$2.00/hr at 500 ton.	34.62	17.98	52.60
509	Backhoe (Track Type) Having a Mfgr's Rated Capacity of 130,000 Lbs. or Over; Boring Machine (Horizontal or Vertical); Caisson Rig; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of 100 Tons or Under, Self-Erecting Tower Crane With A Lifting Capacity Of 4,000 Lbs. & Under; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 175 Ft or Under; Pile Driver; Versi Lifts, Tri-Lifts & Gantrys (20,000 Lbs. & Over). Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013. Premium Increase(s): Add \$.25/hr for cranes with lifting capacity of 45 ton or over.	33.62	17.98	51.60
510	Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of Under 130,000 Lbs., Backhoe (Mini, 15,000 Lbs. & Under); Concrete Bump Cutter, Grinder, Planing or Grooving Machine; Concrete Laser/Screed; Concrete Paver (Slipform); Concrete Pump (Over 46 Meter), Concrete Conveyor (Rotec or Bidwell Type); Concrete Slipform Placer Curb & Gutter Machine; Concrete Spreader & Distributor; Dredge (NOT Performing Work on the Great Lakes); Forklift (Machinery Moving or Steel Erection, 25 Ft & Over); Gradall (Cruz-Aire Type); Hydro-Blaster (10,000 PSI or Over); Milling Machine; Skid Rig; Traveling Crane (Bridge Type). Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.	32.42	17.98	50.40

	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked	HOURLY BASIC RATE	HOURLY FRINGE	
CODE	TRADE OR OCCUPATION	OF PAY \$	BENEFITS \$	TOTAL \$
511	Air, Track, Rotary or Percussion Drilling Machine &/or Hammers, Blaster; Bulldozer or Endloader (Over 40 hp); Compactor (Self-Propelled 85 Ft Total Drum Width & Over, or Tractor Mounted, Towed & Light Equipment); Concrete Pump (46 Meter & Under), Concrete Conveyor (Rotec or Bidwell Type); Crane (Carry Deck, Mini) or Truck Mounted Hydraulic Crane (10 Tons or Under); Environmental Burner; Gantrys (Under 20,000 Lbs.); Grader or Motor Patrol; High Pressure Utility Locating Machine (Daylighting Machine); Manhoist; Material or Stack Hoist; Mechanic or Welder; Railroad Track Rail Leveling Machine, Tie Placer, Extractor, Tamper, Stone Leveler or Rehabilitation Equipment; Roller (Over 5 Ton); Scraper (Self Propelled or Tractor Drawn) 5 cu yd or More Capacity; Screed (Milling Machine); Sideboom; Straddle Carrier or Travel Lift; Tining or Curing Machine; Tractor (Scraper, Dozer, Pusher, Loader); Tractor or Truck Mounted Hydraulic Backhoe; Tractor or Truck Mounted Hydraulic Crane (10 Tons or Under); Trencher (Wheel Type or Chain Type Having Over 8-Inch Bucket). Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.		17.98	49.87
512	Backfiller; Broom or Sweeper; Bulldozer or Endloader (Under 40 hp); Compactor (Self-Propelled 84 Ft Total Drum Width & Under, or Tractor Mounted, Towed & Light Equipment); Concrete Batch Plant, Batch Hopper; Concrete Breaker (Large, Auto, Vibratory/Sonic, Manual or Remote); Concrete Conveyor System; Concrete Finishing Machine (Road Type); Fireman (Pile Driver & Derrick NOT Performing Work on the Great Lakes); Grout Pump; Hoist (Tugger, Automatic); Industrial Locomotives; Jeep Digger; Lift Slab Machine; Mulcher; Robotic Tool Carrier (With or Without Attachments); Roller (Rubber Tire, 5 Ton or Under); Screw or Gypsum Pumps; Stabilizing or Concrete Mixer (Self-Propelled or 14S or Over); Stump Chipper; Trencher (Wheel Type or Chain Type Having 8-Inch Bucket & Under); Winches & A-Frames.	35,59	19.10	54.69
513	Air Compressor (&/or 400 CFM or Over); Air, Electric or Hydraulic Jacking System; Augers (Vertical & Horizontal); Boatmen (NOT Performing Work on the Great Lakes); Boller (Temporary Heat); Crusher, Screening or Wash Plant; Elevator; Farm or Industrial Type Tractor; Fireman (Asphalt Plant NOT Performing Work on the Great Lakes); Forklift; Generator (&/or 150 KW or Over); Greaser; Heaters (Mechanical); Loading Machine (Conveyor); Oiler; Post Hole Digger or Driver; Prestress Machine; Pump (3 Inch or Over) or Well Points; Refrigeration Plant or Freeze Machine; Rock, Stone Breaker; Skid Steer Loader (With or Without Attachments); Vibratory Hammer or Extractor, Power Pack. Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.	29.19	17.98	47.17
514	Gas or Utility Pipeline, Except Sewer & Water (Primary Equipment). Future Increase(s): Add \$2/hr. on 1/1/2013.	34.89	19.68	54.57
515	Gas or Utility Pipeline, Except Sewer & Water (Secondary Equipment).	30.32	17.40	47.72
516	Fiber Optic Cable Equipment	22.00	7.27	29.27
	-			

SEWER, WATER OR TUNNEL CONSTRUCTION

Includes those projects that primarily involve public sewer or water distribution, transmission or collection systems and related tunnel work (excluding buildings).

	SKILLED TRADES				
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE <u>OF PAY</u> \$	HOURLY FRINGE BENEFITS \$	TOTAL \$	
103	Bricklayer, Blocklayer or Stonemason	32.66	16.20	48.86	
105	Carpenter Premium Increase(s): DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.	33,43	19.31	52.74	
107	Cement Finisher Future Increase(s): Add \$1.86 on 6/1/12; Add \$1.87 on 6/1/13; Add \$1.87 on 6/1/14; Add \$1.87 on 6/1/15; Add \$1.75 on 6/1/16. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.40/hr when the Wisconsin Department of Transportation or responsible governing agency requires that work be performed at night under artificial illumination with traffic control and the work is completed after sunset and before sunrise.	30.68	15.68	46.36	
109	Electrician Future Increase(s): Add \$1.40/hr on 6/1/2012. Add \$1.60/hr on 6/1/2013. Premium Increase(s): DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.	31.54	20.95	52.49	
111	Fence Erector	25.50	0.26	25.76	
116	Ironworker Premium Increase(s): DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.	31.31	22.22	53.53	
118	Line Constructor (Electrical)	35.97	18.08	54.05	
125	Pavement Marking Operator	26.00	0.00	26.00	
126	Piledriver	29.56	15.16	44.72	
130	Plumber	36.20	15.02	51.22	
135	Steamfitter	39.90	15.76	55.66	
137	Teledata Technician or Installer	21.26	6.99	28.25	

CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
143	Tuckpointer, Caulker or Cleaner	22.00	9.75	31.75
144	Underwater Diver (Except on Great Lakes)	36.20	18.81	55.01
146	Well Driller or Pump Installer	24.22	14.80	39.02
150	Heavy Equipment Operator - ELECTRICAL LINE CONSTRUCTION ONLY	32.37	16.48	48.85
151	Light Equipment Operator -ELECTRICAL LINE CONSTRUCTION ONLY	28,78	15.16	43.94
152	Heavy Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	17.80	9,00	26.80
153	Light Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	23.38	12.48	35,86
154	Groundman - ELECTRICAL LINE CONSTRUCTION ONLY	21.30	10.97	32.27
	TRUCK DRIVERS			
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
201	Single Axle or Two Axle	23.00	8.64	31.64
203	Three or More Axle	21.17	9.51	30.68
204	Articulated, Euclid, Dumptor, Off Road Material Hauler Future Increase(s): Add \$1.75/hr on 6/1/2012; Add \$1.85/hr on 6/1/2013. Premium Increase(s): DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.	22.50	16.19	38.69
205	Pavement Marking Vehicle	19.25	10.84	30.09
207	Truck Mechanic	21.17	9.51	30.68
	LABORERS			
<u>CODE</u>	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
301	General Laborer Future Increase(s):	25.28	13.44	38.72

Add \$.70/hr. on 06/04/2012; Add \$.80/hr. on 06/03/2013

Premium Increase(s):
Add \$.20 for blaster, bracer, manhole builder, caulker, bottomman and power tool; Add \$.55 for pipelayer; Add \$1.00 for tunnel work 0-15 lbs. compressed air; Add \$2.00 for over 15-30 lbs. compressed air; Add \$3.00 for over 30 lbs. compressed air.

CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE <u>BENEFITS</u> \$	TOTAL \$
303	Landscaper	17.00	6.36	23.36
304	Flagperson or Traffic Control Person	12.00	17.89	29.89
311	Fiber Optic Laborer (Outside, Other Than Concrete Encased)	16.51	0.00	16.51
314	Railroad Track Laborer	14.00	4.77	18.77
	HEAVY EQUIPMENT OPERATORS SEWER, WATER OR TUNNEL WOR			
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
521	Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of 130,000 Lbs. or Over; Calsson Rig; Crane, Tower Crane, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 176 Ft or Over; Crane, Tower Crane, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of Over 100 Tons, Self-Erecting Tower Crane With a Lifting Capacity Of Over 4,000 Lbs., Crane With Boom Dollies; Master Mechanic; Pile Driver. Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013. Premium Increase(s): Add \$.25/hr for cranes with lifting capacity of 45 ton or over.	33.62	17.98	51.60
522	Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of Under 130,000 Lbs., Backhoe (Mini, 15,000 Lbs. & Under); Boring Machine (Directional); Concrete Bump Cutter, Grinder, Planing or Grooving Machine; Concrete Laser/Screed; Concrete Paver (Slipform); Concrete Pump (Over 46 Meter), Concrete Conveyor (Rotec or Bidwell Type); Concrete Spreader & Distributor; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 175 Ft or Under; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of 100 Tons or Under, Self-Erecting Tower Crane With a Lifting Capacity of 4,000 Lbs. & Under; Dredge (NOT Performing Work on the Great Lakes); Milling Machine; Skid Rig; Telehandler; Traveling Crane (Bridge Type). Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.		17.98	50.40

	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked	HOURLY BASIC RATE	HOURLY FRINGE	
CODE	TRADE OR OCCUPATION	OF PAY \$	BENEFITS \$	TOTAL \$
523	Air Track, Rotary or Percussion Drilling Machine &/or Hammers, Blaster; Boring Machine (Horizontal or Vertical); Bulldozer or Endloader (Over 40 hp); Crane (Carry Deck, Mini) or Truck Mounted Hydraulic Crane (10 Tons or Under); Concrete Pump (46 Meter & Under), Concrete Conveyor (Rotec or Bidwell Type); Concrete Slipform Placer Curb & Gutter Machine; Gradall (Cruz-Aire Type); Grader or Motor Patrol; Hydro-Blaster (10,000 PSI or Over); Manhoist; Material or Stack Hoist; Mechanic or Welder; Roller (Over 5 Ton); Scraper (Self Propelled or Tractor Drawn) 5 cu yd or More Capacity; Screed (Milling Machine); Sideboom; Straddle Carrier or Travel Lift; Tractor (Scraper, Dozer, Pusher, Loader); Tractor or Truck Mounted Hydraulic Backhoe; Tractor or Truck Mounted Hydraulic Crane (10 Tons or Under); Trencher (Wheel Type or Chain Type Having Over 8-Inch Bucket). Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.	31.89	17.98	49.87
524	Backfiller; Broom or Sweeper; Bulldozer or Endloader (Under 40 hp); Compactor (Self-Propelled 85 Ft Total Drum Width & Over, or Tractor Mounted, Towed & Light Equipment); Concrete Batch Plant, Batch Hopper; Concrete Breaker (Large, Auto, Vibratory/Sonic, Manual or Remote); Concrete Conveyor System; Concrete Finishing Machine (Road Type); Environmental Burner; Fireman (Pile Driver & Derrick NOT Performing Work on the Great Lakes); Forestry Equipment, Timbco, Tree Shear, Tub Grinder, Processor; Hoist (Tugger, Automatic); Grout Pump; Jeep Digger; Lift Slab Machine; Mulcher; Power Subgrader; Pump (3 Inch or Over) or Well Points; Robotic Tool Carrier (With or Without Attachments); Roller (Rubber Tire, 5 Ton or Under); Screw or Gypsum Pumps; Stabilizing or Concrete Mixer (Self-Propelled or 14S or Over); Stump Chipper; Tining or Curing Machine; Trencher (Wheel Type or Chain Type Having 8-Inch Bucket & Under); Winches & A-Frames.	30.89	17.16	48.05
525	Air Compressor (&/or 400 CFM or Over); Air, Electric or Hydraulic Jacking System; Augers (Vertical & Horizontal); Compactor (Self-Propelled 84 Ft Total Drum Width & Under, or Tractor Mounted, Towed & Light Equipment); Crusher, Screening or Wash Plant; Farm or Industrial Type Tractor; Fireman (Asphalt Plant NOT Performing Work on the Great Lakes); Generator (&/or 150 KW or Over); Heaters (Mechanical); High Pressure Utility Locating Machine (Daylighting Machine); Loading Machine (Conveyor); Post Hole Digger or Driver; Refrigeration Plant or Freeze Machine; Rock, Stone Breaker; Skid Steer Loader (With or Without Attachments); Vibratory Hammer or Extractor, Power Pack. Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.	29.19	17.98	47.17
526	Boiler (Temporary Heat); Forklift; Greaser; Oller.	29.19	17.96	47.15
527	Work Performed on the Great Lakes Including Diver; Wet Tender or Hydraulic Dredge Engineer.	36.20	18.81	55.01
528	Work Performed on the Great Lakes Including 70 Ton & Over Tug Operator; Assistant Hydraulic Dredge Engineer; Crane or Backhoe Operator; Hydraulic Dredge Leverman or Diver's Tender; Mechanic or Welder.	36.20	18.81	55.01

CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE <u>BENEFITS</u> \$	TOTAL \$
529	Work Performed on the Great Lakes Including Deck Equipment Operator or Machineryman (Maintains Cranes Over 50 Tons or Backhoes 115,000 Lbs. or More); Tug, Launch or Loader, Dozer or Like Equipment When Operated on a Barge, Breakwater Wall, Slip, Dock or Scow, Deck Machinery.	26.80	18.52	45.32
530	Work Performed on the Great Lakes Including Deck Equipment Operator; Machineryman or Fireman (Operates 4 Units or More or Maintains Cranes 50 Tons or Under or Backhoes 115,000 Lbs. or Under), Deck Hand, Deck Engineer or Assistant Tug Operator; Off Road Trucks - Great Lakes ONLY.	3	18.52	45.32

AIRPORT PAVEMENT OR STATE HIGHWAY CONSTRUCTION

Includes all airport projects (excluding buildings) and all projects awarded by the Wisconsin Department of Transportation (excluding buildings).

	SKILLED TRADES			
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS	TOTAL
103	Bricklayer, Blocklayer or Stonemason	32.66	15.92	48.58
105	Carpenter	30.23	15.16	45.39
107	Cement Finisher Future Increase(s): Add \$1.86 on 6/1/12; Add \$1.87 on 6/1/13; Add \$1.87 on 6/1/14; Add \$1.87 on 6/1/15; Add \$1.75 on 6/1/16. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.40/hr when the Wisconsin Department of Transportation or responsible governing agency requires that work be performed at night under artificial illumination with traffic control and the work is completed after sunset and before sunrise.	30.68	15.68	46.36
109	Electrician	37.25	14.68	51.93
111	Fence Erector	35.62	0.00	35.62
116	Ironworker	30.90	19.11	50.01
118	Line Constructor (Electrical)	35.97	18.08	54.05
124	Painter	28.00	11.15	39.15
125	Pavement Marking Operator	26.65	14.92	41.57
126	Piledriver	29.56	. 15.16	44.72
133	Roofer or Waterproofer	28.06	0.00	28.06
137	Teledata Technician or Installer	21.26	6,99	28.25
143	Tuckpointer, Caulker or Cleaner	22.00	9.75	31.75
144	Underwater Diver (Except on Great Lakes)	36.20	18.81	55.01
150	Heavy Equipment Operator - ELECTRICAL LINE CONSTRUCTION ONLY	35.42	12.90	48.32
151	Light Equipment Operator -ELECTRICAL LINE CONSTRUCTION ONLY	35,50	14.27	49.77
152	Heavy Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	25.18	14.07	39.25
153	Light Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	23.38	12.48	35.86

Detern	nination No. 201200105			Page 15 of 30
154	Groundman - ELECTRICAL LINE CONSTRUCTION ONLY	21.30	10.97	32.27
	TRUCK DRIVERS			
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
201	Single Axle or Two Axle Future Increase(s): Add \$1.75/hr on 6/1/2012; Add \$1.85/hr on 6/1/2013. Premium Increase(s): DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.	22.35	16.19	38.54
203	Three or More Axle Future Increase(s): Add \$1.75/hr on 6/1/2012; Add \$1.85/hr on 6/1/2013. Premium Increase(s): DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.	22.50	16.19	38.69
204	Articulated, Euclid, Dumptor, Off Road Material Hauler	24.91	15.63	40.54
205	Pavement Marking Vehicle	23.84	14.76	38.60
206	Shadow or Pilot Vehicle	24.76	15.35	40.11
207	Truck Mechanic	24.91	15.35	40.26

	LABORERS			
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
301	General Laborer Future Increase(s): Add \$1.60/hr on 6/1/2012: Add \$1.70/hr on 6/1/2013; Add \$1.60/hr on 6/1/2014. Premium Increase(s): Add \$.10/hr for topman, air tool operator, vibrator or tamper operator (mechanical hand operated), chain saw operator and demolition burning torch laborer; Add \$.15/hr for bituminous worker (raker and luteman), formsetter (curb, sidewalk and pavement) and strike off man; Add \$.20/hr for blaster and powderman; Add \$.25/hr for bottomman; Add \$.35/hr for line and grade specialist; Add \$.45/hr for pipelayer. / DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).	27.20	13.45	40.65
302	Asbestos Abatement Worker	23.96	12.88	36.84
303	Future Increase(s): Add \$1.60/hr on 6/1/12; Add \$1.70/hr on 6/1/13; Add \$1.60/hr on 6/1/14. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).	27.20	13.45	40.65
304	Flagperson or Traffic Control Person Future Increase(s): Add \$1.60/hr on 6/1/2012; Add \$1.70/hr on 6/1/2013; Add \$1.60/hr on 6/1/2014. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr when the Wisconsin Department of Transportation or responsible governing agency requires that work be performed at night under artificial illumination with traffic control and the work is completed after sunset and before sunrise.	23.55	13.45	37.00

	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked	HOURLY BASIC RATE	HOURLY FRINGE	
CODE	TRADE OR OCCUPATION	OF PAY \$	BENEFITS \$	TOTAL \$
311	Fiber Optic Laborer (Outside, Other Than Concrete Encased)	16.51	0.00	16.51
314	Railroad Track Laborer	14.00	4.77	18.77
	HEAVY EQUIPMENT OPERATORS AIRPORT PAVEMENT OR STATE HIGHWAY CO	NSTRUCTION		
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY	HOURLY FRINGE BENEFITS	TOTAL
		\$	\$	\$
531	Crane, Tower Crane, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 176 Ft or Over; Crane, Tower Crane, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of Over 100 Tons, Self-Erecting Tower Crane With a Lifting Capacity Of Over 4,000 Lbs., Crane With Boom Dollies; Traveling Crane (Bridge Type). Future Increase(s): Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).	·	18.90	53.12
532	Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of 130,000 Lbs. or Over; Caisson Rig; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 175 Ft or Under; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of 100 Tons or Under, Self-Erecting Tower Crane With A Lifting Capacity Of 4,000 Lbs., & Under; Dredge (NOT Performing Work on the Great Lakes); Licensed Boat Pilot (NOT Performing Work on the Great Lakes); Pile Driver. Future Increase(s): Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).		18.90	52.62

CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$	
533	Air Track, Rotary or Percussion Drilling Machine &/or Hammers, Blaster;	33.22	18.90	52.12	

Air Track, Rotary or Percussion Drilling Machine &/or Hammers, Blaster; Asphalt Heater, Planer & Scarifier; Asphalt Milling Machine; Asphalt Screed; Automatic Subgrader (Concrete); Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of Under 130,000 Lbs., Backhoe (Mini, 15,000 Lbs. & Under); Bituminous (Asphalt) Plant & Paver, Screed; Boatmen (NOT Performing Work on the Great Lakes); Boring Machine (Directional, Horizontal or Vertical); Bridge (Bidwell) Paver; Bulldozer or Endloader; Concrete Batch Plant, Batch Hopper; Concrete Breaker (Large, Auto, VIbratory/Sonic, Manual or Remote); Concrete Bump Cutter, Grinder, Planing or Grooving Machine; Concrete Conveyor System; Concrete Laser/Screed: Concrete Paver (Slipform); Concrete Pump, Concrete Conveyor (Rotec or Bidwell Type); Concrete Slipform Placer Curb & Gutter Machine; Concrete Spreader & Distributor; Crane (Carry Deck, Mini) or Truck Mounted Hydraulic Crane (10 Tons or Under); Crane With a Lifting Capacity of 25 Tons or Under; Forestry Equipment, Timbco, Tree Shear, Tub Grinder, Processor; Gradall (Cruz-Aire Type); Grader or Motor Patrol; Grout Pump; Hydro-Blaster (10,000 PSI or Over); Loading Machine (Conveyor); Material or Stack Hoist; Mechanic or Welder: Milling Machine: Post Hole Digger or Driver; Roller (Over 5 Ton); Scraper (Self Propelled or Tractor Drawn) 5 cu yds or More Capacity; Shoulder Widener; Sideboom; Skid Rig; Stabilizing or Concrete Mixer (Self-Propelled or 14S or Over); Straddle Carrier or Travel Lift; Tractor (Scraper, Dozer, Pusher, Loader); Tractor or Truck Mounted Hydraulic Backhoe; Trencher (Wheel Type or Chain Type); Tube Finisher; Tugger (NOT Performing Work on the Great Lakes); Winches & A-Frames.

Future Increase(s):
Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14.

Premium Increase(s):

DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).

	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked	HOURLY BASIC RATE	HOURLY FRINGE	
CODE	TRADE OR OCCUPATION	OF PAY \$	BENEFITS \$	TOTAL \$
	Belting, Burlap, Texturing Machine; Broom or Sweeper; Compactor (Self-Propelled or Tractor Mounted, Towed & Light Equipment); Concrete Finishing Machine (Road Type); Environmental Burner; Farm or Industrial Type Tractor; Fireman (Asphalt Plant, Pile Driver & Derrick NOT Performing Work on the Great Lakes); Forklift; Greaser; Hoist (Tugger, Automatic); Jeep Digger; Joint Sawer (Multiple Blade); Launch (NOT Performing Work on the Great Lakes); Lift Slab Machine; Mechanical Float; Mulcher; Power Subgrader; Robotic Tool Carrier (With or Without Attachments); Roller (Rubber Tire, 5 Ton or Under); Self Propelled Chip Spreader; Shouldering Machine; Skid Steer Loader (With or Without Attachments); Telehandler; Tining or Curing Machine. Future Increase(s): Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).	32.96	18.90	51.86
535	Air Compressor (&/or 400 CFM or Over); Air, Electric or Hydraulic Jacking System; Augers (Vertical & Horizontal); Automatic Belt Conveyor & Surge Bin; Boiler (Temporary Heat); Concrete Proportioning Plant; Crusher, Screening or Wash Plant; Generator (&/or 150 KW or Over); Heaters (Mechanical); High Pressure Utility Locating Machine (Daylighting Machine); Mudjack; Oiler; Prestress Machine; Pug Mill; Pump (3 Inch or Over) or Well Points; Rock, Stone Breaker; Screed (Milling Machine); Stump Chipper; Tank Car Heaters; Vibratory Hammer or Extractor, Power Pack. Future Increase(s): Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).		18.90	51.57
536	Fiber Optic Cable Equipment.	22.00	7.27	29.27
537	Work Performed on the Great Lakes Including Diver; Wet Tender or Hydraulic Dredge Engineer.	36.20	18.81	55.01

CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
538	Work Performed on the Great Lakes Including 70 Ton & Over Tug Operator; Assistant Hydraulic Dredge Engineer; Crane or Backhoe Operator; Hydraulic Dredge Leverman or Diver's Tender; Mechanic or Welder.	36.20	18.81	55.01
539	Work Performed on the Great Lakes Including Deck Equipment Operator or Machineryman (Maintains Cranes Over 50 Tons or Backhoes 115,000 Lbs. or More); Tug, Launch or Loader, Dozer or Like Equipment When Operated on a Barge, Breakwater Wall, Slip, Dock or Scow, Deck Machinery.	26.80	18.52	45.32
540	Work Performed on the Great Lakes Including Deck Equipment Operator, Machineryman or Fireman (Operates 4 Units or More or Maintains Cranes 50 Tons or Under or Backhoes 115,000 Lbs. or Under); Deck Hand, Deck Engineer or Assistant Tug Operator; Off Road Trucks-Great Lakes ONLY.	3	18.52	45.32

LOCAL STREET OR MISCELLANEOUS PAVING CONSTRUCTION

Includes roads, streets, alleys, trails, bridges, paths, racetracks, parking lots and driveways (except residential or agricultural), public sidewalks or other similar projects (excluding projects awarded by the Wisconsin Department of Transportation).

	SKILLED TRADES			
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	<u>TOTAL</u> \$
103	Bricklayer, Blocklayer or Stonemason	32.66	16.20	48.86
105	Carpenter	29.06	15.16	44.22
107	Cement Finisher Future Increase(s): Add \$1.86 on 6/1/12; Add \$1.87 on 6/1/13; Add \$1.87 on 6/1/14; Add \$1.87 on 6/1/15; Add \$1.75 on 6/1/16. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.40/hr when the Wisconsin Department of Transportation or responsible governing agency requires that work be performed at night under artificial illumination with traffic control and the work is completed after sunset and before sunrise.	30,68	15.68	46.36
109	Electrician Future Increase(s): Add \$.50/hr. effective 06/04/2012. Premium Increase(s): DOT PREMIUM: Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day.	28.74	17.86	46.60
111	Fence Erector	25,50	0.26	25.76
116	Ironworker` ·	30.90	19.11	50.01
118	Line Constructor (Electrical)	35.97	18.08	54.05
124	Painter	25.65	14.11	39.76
125	Pavement Marking Operator	26.00	0.00	26.00
126	Piledriver	29.56	15.16	44.72
133	Roofer or Waterproofer	28.06	0.00	28.06
137	Teledata Technician or Installer	21.26	6.99	28.25
143	Tuckpointer, Caulker or Cleaner	22.00	9.75	31.75
144	Underwater Diver (Except on Great Lakes)	36.20	18.81	55.01
150	Heavy Equipment Operator - ELECTRICAL LINE CONSTRUCTION ONLY	35.42	12.90	48.32

Page	22	Ωf	30
P 200	44	u	QU.

Determination	No	201	1200105
Determination:	140.	~~	1200100

	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked	HOURLY BASIC RATE	HOURLY FRINGE	
CODE	TRADE OR OCCUPATION	OF PAY \$	BENEFITS \$	TOTAL \$
151	Light Equipment Operator -ELECTRICAL LINE CONSTRUCTION ONLY Premium Increase(s):	29.64	14.64	44.28
152	Heavy Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	25.18	13.07	38.25
153	Light Truck Driver - ELECTRICAL LINE CONSTRUCTION ONLY	23.38	12.48	35.86
154	Groundman - ELECTRICAL LINE CONSTRUCTION ONLY	21.30	10.97	32.27
	TRUCK DRIVERS		4-1	
	Fringe Benefits Must Be Paid On All Hours Worked	HOURLY BASIC RATE	HOURLY FRINGE BENEFITS	TOTAL
CODE	TRADE OR OCCUPATION	OF PAY \$	\$	\$
201	Single Axle or Two Axle	15.00	0.00	15.00
203	Three or More Axle	19.50	4.97	24.47
204	Articulated, Euclid, Dumptor, Off Road Material Hauler Future Increase(s): Add \$1/hr on 6/3/2012; Add \$1/hr on 6/2/2013.	31.89	17.98	49.87
205	Pavement Marking Vehicle	19.25	10.84	30.09
206	Shadow or Pilot Vehicle	15.00	0.00	15.00
207	Truck Mechanic	19.50	4.97	24.47
	LABORERS			
CODE	Fringe Benefits Must Be Pald On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY	HOURLY FRINGE BENEFITS	TOTAL
		\$	\$	\$
301	General Laborer	26.15	12.29	38.44
303	Landscaper	23.71	15.07	38.78
304	Flagperson or Traffic Control Person	12.00	17.89	29.89
311	Fiber Optic Laborer (Outside, Other Than Concrete Encased)	16.51	0.00	16.51
314	Railroad Track Laborer	14.00	4.77	18.77

HEAVY EQUIPMENT OPERATORS CONCRETE PAVEMENT OR BRIDGE WORK

CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE <u>BENEFITS</u> \$	TOTAL \$
541	Crane, Tower Crane, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of Over 100 Tons, Self-Erecting Tower Crane With a Lifting Capacity Of Over 4,000 Lbs., Crane With Boom Dollies; Crane, Tower Crane, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 176 Ft or Over; Master Mechanic. Future Increase(s): Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).	34.22	18.90	53.12
542	Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of 130,000 Lbs. or	33.72	18.90	52.62

Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of 130,000 Lbs. or Over; Caisson Rig; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of 100 Tons or Under, Self-Erecting Tower Crane With a Lifting Capacity of 4,000 Lbs. & Under; Crane, Tower Crane Portable Tower, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 175 Ft or Under; Dredge (NOT Performing Work on the Great Lakes); Licensed Boat Pilot (NOT Performing Work on the Great Lakes); Pile Driver.

Future Increase(s):
Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14.

Premium Increase(s):
DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).

CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$	
543	Air Track, Rotary or Percussion Drilling Machine &/or Hammers, Blaster;	33,22	18.90	52.12	

Air Track, Rotary or Percussion Drilling Machine &/or Hammers, Blaster; Automatic Subgrader (Concrete); Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of Under 130,000 Lbs., Backhoe (Mini, 15,000 Lbs. & Under); Boring Machine (Directional, Horizontal or Vertical); Bridge (Bidwell) Paver; Bulldozer or Endloader; Concrete Batch Plant, Batch Hopper; Concrete Breaker (Large, Auto, Vibratory/Sonic, Manual or Remote); Concrete Bump Cutter, Grinder, Planing or Grooving Machine; Concrete Conveyor System; Concrete Laser/Screed; Concrete Paver (Slipform); Concrete Pump, Concrete Conveyor (Rotec or Bidwell Type); Concrete Slipform Placer Curb & Gutter Machine; Concrete Spreader & Distributor; Crane (Carry Deck, Mini) or Truck Mounted Hydraulic Crane (10 Tons or Under); Crane With a Lifting Capacity of 25 Tons or Under; Forestry Equipment, Timbco, Tree Shear, Tub Grinder, Processor; Gradall (Cruz-Aire Type); Grader or Motor Patrol; Grout Pump; Hydro-Blaster (10,000 PSI or Over); Loading Machine (Conveyor); Manhoist; Material or Stack Hoist: Mechanic or Welder; Milling Machine; Post Hole Digger or Driver; Scraper (Self Propelled or Tractor Drawn) 5 cu yds or More Capacity; Shoulder Widener; Sideboom; Skid Rig; Stabilizing or Concrete Mixer (Self-Propelled or 14S or Over); Straddle Carrier or Travel Lift; Tractor (Scraper, Dozer, Pusher, Loader); Tractor or Truck Mounted Hydraulic Backhoe; Trencher (Wheel Type or Chain Type); Tube Finisher; Tugger (NOT Performing Work on the Great Lakes); Winches & A-Frames.

Future Increase(s):
Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14.

Premium Increase(s):

DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).

	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked	HOURLY BASIC RATE	HOURLY FRINGE	
CODE	TRADE OR OCCUPATION	OF PAY \$	BENEFITS \$	TOTAL \$
544	Backfiller; Belting, Burlap, Texturing Machine; Broom or Sweeper; Compactor (Self-Propelled or Tractor Mounted, Towed & Light Equipment); Concrete Finishing Machine (Road Type); Environmental Burner; Farm or Industrial Type Tractor; Fireman (Pile Driver & Derrick NOT Performing Work on the Great Lakes); Forklift; Greaser; Jeep Digger; Joint Sawer (Multiple Blade); Launch (NOT Performing Work on the Great Lakes); Lift Slab Machine; Mechanical Float; Mulcher; Power Subgrader; Robotic Tool Carrier (With or Without Attachments); Self Propelled Chip Spreader; Shouldering Machine; Skid Steer Loader (With or Without Attachments); Telehandler; Tining or Curing Machine. Future Increase(s): Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14. Premium Increase(s): DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects Involving temporary traffic control setup, for lane and shoulder closures, when work under artificial Illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).	33,22	18.90	52.12
545	Air Compressor (&/or 400 CFM or Over); Air, Electric or Hydraulic Jacking System; Automatic Belt Conveyor & Surge Bin; Boiler (Temporary Heat); Concrete Proportioning Plant; Crusher, Screening or Wash Plant; Generator (&/or 150 KW or Over); Heaters (Mechanical); High Pressure Utility Locating Machine (Daylighting Machine); Mudjack; Oiler; Prestress Machine; Pug Mill; Pump (3 Inch or Over) or Well Points; Rock, Stone Breaker; Screed (Milling Machine); Stump Chipper; Tank Car Heaters; Vibratory Hammer or Extractor, Power Pack.	30.42	17.58	48.00
546	Fiber Optic Cable Equipment.	22.00	7.27	29.27
547	Work Performed on the Great Lakes Including Diver; Wet Tender or Hydraulic Dredge Engineer.	36.20	18,81	55.01
548	Work Performed on the Great Lakes Including 70 Ton & Over Tug Operator; Assistant Hydraulic Dredge Engineer; Crane or Backhoe Operator; Hydraulic Dredge Leverman or Diver's Tender; Mechanic or Welder.	36.20	18.81	55.01
549	Work Performed on the Great Lakes Including Deck Equipment Operator or Machineryman (Maintains Cranes Over 50 Tons or Backhoes 115,000 Lbs. or more); Tug, Launch or Loader, Dozer or Like Equipment When Operated on a Barge, Breakwater Wall, Slip, Dock or Scow, Deck Machinery.	26.80	18.52	45.32
550	Work Performed on the Great Lakes Including Deck Equipment Operator; Machineryman or Fireman (Operates 4 Units or More or Maintains Cranes 50 Tons or Under or Backhoes 115,000 Lbs. or Under); Deck Hand, Deck Engineer or Assistant Tug Operator; Off Road Trucks - Great Lakes ONLY.	26.80	18.52	45.32

HEAVY EQUIPMENT OPERATORS ASPHALT PAVEMENT OR OTHER WORK

CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
551	Crane, Tower Crane, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of Over 100 Tons, Self Erecting Tower Crane With a Lifting Capacity of Over 4,000 Lbs., Crane With Boom Dollles; Crane, Tower Crane, Pedestal Tower or Derrick, With Boom, Leads and/or Jib Lengths Measuring 176 Ft or Over; Master Mechanic.	34.62	17.96	52.58
552	Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of 130,000 Lbs. or Over; Caisson Rig; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With or Without Attachments, With a Lifting Capacity of 100 Tons or Under, Self-Erecting Tower Crane With a Lifting Capacity Of 4,000 Lbs. & Under; Crane, Tower Crane, Portable Tower, Pedestal Tower or Derrick, With Boom, Leads &/or Jib Lengths Measuring 175 Ft of Under; Dredge (NOT Performing Work on the Great Lakes); Licensed Boat Pilot (NOT Performing Work on the Great Lakes); Pile Driver. Future Increase(s): Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr		18.90	52.62

on 6/1/14.

Premium Increase(s):
DOT PREMIUMS: 1) Pay two times the hourly basic rate on Sunday, New Year's Day, Memorial Day, Independence Day, Labor Day, Thanksgiving Day & Christmas Day. 2) Add \$1.25/hr for work on projects involving temporary traffic control setup, for lane and shoulder closures, when work under artificial illumination conditions is necessary as required by the project provisions (including prep time prior to and/or cleanup after such time period).

	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked	HOURLY BASIC RATE	HOURLY FRINGE	
CODE	TRADE OR OCCUPATION	OF PAY \$	BENEFITS \$	TOTAL \$
553	Air, Track; Rotary or Percussion Drilling Machine &/or Hammers, Blaster; Asphalt Heater, Planer & Scarifier; Asphalt Milling Machine; Asphalt Screed; Backhoe (Track Type) Having a Mfgr.'s Rated Capacity of Under 130,000 Lbs., Backhoe (Mini, 15,000 Lbs. & Under); Bituminous (Asphalt) Plant & Paver, Screed; Boring Machine (Directional, Horizontal or Vertical); Bulldozer or Endloader; Concrete Breaker (Large, Auto, Vibratory/Sonic, Manual or Remote); Concrete Conveyor System; Concrete Laser/Screed; Concrete Slipform Placer Curb & Gutter Machine; Crane (Carry Deck, Mini) or Truck Mounted Hydraulic Crane (10 Tons or Under); Crane With a Lifting Capacity of 25 Tons or Under; Forestry Equipment, Timbco, Tree Shear, Tub Grinder, Processor; Gradall (Cruz-Aire Type); Grader or Motor Patrol; Hydro-Blaster (10,000 PSI or Over); Loading Machine (Conveyor); Manhoist; Material or Stack Hoist; Mechanic or Welder; Milling Machine; Post Hole Digger or Driver; Railroad Track Rail Leveling Machine, Tie Placer, Extractor, Tamper, Stone Levele or Rehabilitation Equipment; Roller (Over 5 Ton); Scraper (Self Propelled or Tractor Drawn) 5 cu yds or More Capacity; Shoulder Widener; Sideboom; Skid Rig; Stabilizing or Concrete Mixer (Self-Propelled or 14S or Over); Tractor (Scraper, Dozer, Pusher, Loader); Tractor or Truck Mounted Hydraulic Backhoe; Trencher (Wheel Type or Chain Type); Tube Finisher; Tugger (NOT Performing Work on the Great Lakes); Winches & A-Frames. Future Increase(s): Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14.	i.	18.55	51.22
554	Backfiller; Broom or Sweeper; Compactor (Self-Propelled or Tractor Mounted, Towed & Light Equipment); Concrete Finishing Machine (Road Type); Environmental Burner; Farm or Industrial Type Tractor; Fireman (Asphalt Plant, Pile Driver & Derrick NOT Performing Work on the Great Lakes); Forklift; Greaser; Hoist (Tugger, Automatic); Jeep Digger; Joint Sawer (Multiple Blade); Launch (NOT Performing Work on the Great Lakes); Lift Slab Machine; Mechanical Float; Mulcher; Power Subgrader; Robotic Tool Carrier (With or Without Attachments); Roller (Rubber Tire, 5 Ton or Under); Self-Propelled Chip Spreader; Shouldering Machine; Skid Steer Loader (With or Without Attachments); Telehandler.	31.52	´ 17.89	49.41
555	Air Compressor (&/or 400 CFM or Over); Air, Electric or Hydraulic Jacking System; Augers (Vertical & Horizontal); Automatic Belt Conveyor & Surge Bin; Boiler (Temporary Heat); Crusher, Screening or Wash Plant; Generator (&/or 150 KW or Over); Heaters (Mechanical); High Pressure Utility Locating Machine (Daylighting Machine); Mudjack; Oiler; Prestress Machine; Pug Mill; Pump (3 Inch or Over) or Well Points; Rock, Stone Breaker; Screed (Milling Machine); Stump Chipper; Tank Car Heaters; Vibratory Hammer or Extractor, Power Pack. Future Increase(s): Add \$2/hr on 6/1/12; Add \$2/hr on 6/1/13; Add \$1.75/hr on 6/1/14.	32.67	18.55	51.22
556	Fiber Optic Cable Equipment.	22.00	7.27	29.27

RESIDENTIAL OR AGRICULTURAL CONSTRUCTION

Includes single family houses or apartment buildings of no more than four (4) stories in height and all buildings, structures or facilities that are primarily used for agricultural or farming purposes, excluding commercial buildings. For classification purposes, the exterior height of a residential building, in terms of stories, is the primary consideration. All incidental items such as site work, driveways, parking lots, private sidewalks, private septic systems or sewer and water laterals connected to a public system and swimming pools are included within this definition. Residential buildings of five (5) stories and above are NOT included within this definition.

	SKILLED TRADES	S		
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE <u>OF PAY</u> \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
101	Acoustic Ceiling Tile Installer	27.00	2.47	29.47
102	Boilermaker	31.09	23.75	54.84
103	Bricklayer, Blocklayer or Stonemason	32.00	3.00	35.00
104	Cabinet Installer	22.00	2.74	24.74
105	Carpenter	27.00	3.46	30.46
10 . 6	Carpet Layer or Soft Floor Coverer	23.95	2.78	26.73
107	Cement Finisher	21.33	4.25	25.58
108	Drywall Taper or Finisher	23.80	1.55	25.35
109	Electrician	22.00	9.18	31.18
110	Elevator Constructor	43.79	25.48	69.27
111	Fence Erector	17.64	4.33	21.97
112	Fire Sprinkler Fitter	36.39	16.97	53.36
113	Glazier	36.23	11.22	47.45
114	Heat or Frost Insulator	29.04	19.73	48.77
115	Insulator (Batt or Blown)	18.95	1.70	20.65
116	Ironworker	30.90	19.11	50.01
117	Lather	28.15	15.14	43.29
119	Marble Finisher	31.16	16.27	47.43
120	Marble Mason	32.66	16.20	48.86
121	Metal Building Erector	17.50	2.80	20.30
123	Overhead Door Installer	17.00	0.00	17.00
124	Painter	25.65	6.33	31.98
125	Pavement Marking Operator	26.00	0.00	26.00

<u>CODE</u>	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE <u>BENEFITS</u> \$	TOTAL \$
129	Plasterer	19.00	0.29	19.29
130	Plumber	30.00	10.34	40.34
132	Refrigeration Mechanic	30.96	0.00	30.96
133	Roofer or Waterproofer	29,85	1.55	31.40
134	Sheet Metal Worker	21.03	3.40	24.43
135	Steamfitter	32.59	11.05	43.64
137	Teledata Technician or Installer	19.23	5.32	24.55
138	Temperature Control Installer	22.45	4.11	26.56
139	Terrazzo Finisher	18.00	5.35	23.35
140	Terrazzo Mechanic	31.16	16.27	47.43
141	Tile Finisher	23.96	13.36	37.32
142	Tile Setter	21.00	0.00	21.00
143	Tuckpointer, Caulker or Cleaner	23.96	12.88	36,84
146	Weil Driller or Pump installer	15.10	12.38	27.48
147	Siding Installer	18.80	1.42	20.22
	TRUCK DRIVERS			
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
201	Single Axle or Two Axle	19.86	2.54	22.40
203	Three or More Axle	19.50	14.27	33.77
205	Pavement Marking Vehicle	19.25	10.84	30.09
207	Truck Mechanic	19.00	1.75	20.75
	LABORERS			
ODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL \$
301	General Laborer	16.09	7.18	23.27
302	Asbestos Abatement Worker	17.00	2.21	19.21
303	Landscaper	25.00	0.54	25.54

Detern	nination No. 201200105			Page 30 of 3
311	Fiber Optic Laborer (Outside, Other Than Concrete Encased)	16.51	0.00	16.51
	HEAVY EQUIPMENT OPERATORS RESIDENTIAL OR AGRICULTURAL CONST		•	
CODE	Fringe Benefits Must Be Paid On <u>All</u> Hours Worked TRADE OR OCCUPATION	HOURLY BASIC RATE OF PAY \$	HOURLY FRINGE BENEFITS \$	TOTAL
557	Asphalt Heater, Planer & Scarifier; Asphalt Milling Machine; Asphalt Screed; Backhoe (Track Type); Backhoe (Mini, 15,000 Lbs. & Under); Bituminous (Asphalt) Plant & Paver, Screed; Boring Machine (Directional, Horizontal or Vertical); Bulldozer or Endloader; Concrete Breaker (Large, Auto, Vlbratory/Sonic, Manual or Remote); Concrete Bump Cutter, Grinder, Planing or Grooving Machine; Concrete Conveyor System; Concrete Laser/Screed; Concrete Paver (Slipform); Concrete Pump, Concrete Conveyor (Rotec or Bidwell-Type); Concrete Slipform Placer Curb & Gutter Machine; Concrete Spreader & Distributor; Crane (Carry Deck, Mini) or Truck Mounted Hydraulic Crane (10 Tons or Under); Crane With a Lifting Capacity of 25 Tons or Under; Crane, Shovel, Dragline, Clamshells; Forestry Equipment, Timbco, Tree Shear, Tub Grinder, Processor; Grader or Motor Patrol; Grout Pump; Hydro-Blaster (10,000 PSI or Over); Loading Machine (Conveyor); Manhoist; Material or Stack Hoist; Mechanic or Welder; Milling Machine; Roller (Over 5 Ton); Scraper (Self Propelled or Tractor Drawn) 5 cu yds or More Capacity; Shoulder Widener; Skid Rig; Stabilizing or Concrete Mixer (Self-Propelled or 14S or Over); Tractor (Scraper, Dozer, Pusher, Loader); Tractor or Truck Mounted Hydraulic Backhoe; Tractor or Truck Mounted Hydraulic Crane (10 Tons or Under); Trencher (Wheel Type or Chain Type); Winches & A-Frames.	29.45	15.37	44.82
558	Air Compressor (&/or 400 CFM or Over); Air, Electric or Hydraulic Jacking System; Backfiller; Belting, Burlap, Texturing Machine; Boiler (Temporary Heat); Broom or Sweeper; Compactor (Self-Propelled or Tractor Mounted, Towed & Light Equipment); Concrete Finishing Machine (Road Type); Farm or Industrial Type Tractor; Forklift; Generator (&/or 150 KW or Over);		14.35	40.80

Air Compressor (&/or 400 CFM or Over); Air, Electric or Hydraulic Jacking System; Backfiller; Belting, Burlap, Texturing Machine; Boiler (Temporary Heat); Broom or Sweeper; Compactor (Self-Propelled or Tractor Mounted, Towed & Light Equipment); Concrete Finishing Machine (Road Type); Farm or Industrial Type Tractor; Forklift; Generator (&/or 150 KW or Over); Heaters (Mechanical); High Pressure Utility Locating Machine (Daylighting Machine); Jeep Digger; Lift Slab Machine; Mulcher; Oiler; Post Hole Digger or Driver; Power Subgrader; Pump (3 Inch or Over) or Well Points; Robotic Tool Carrier (With or Without Attachments); Rock, Stone Breaker; Roller (Rubber Tire, 5 Tons or Under); Screed (Milling Machine); Self Propelled Chip Spreader; Shouldering Machine; Skid Steer Loader (With or Without Attachments); Stump Chipper; Telehandler; Vibratory Hammer or Extractor, Power Pack.