


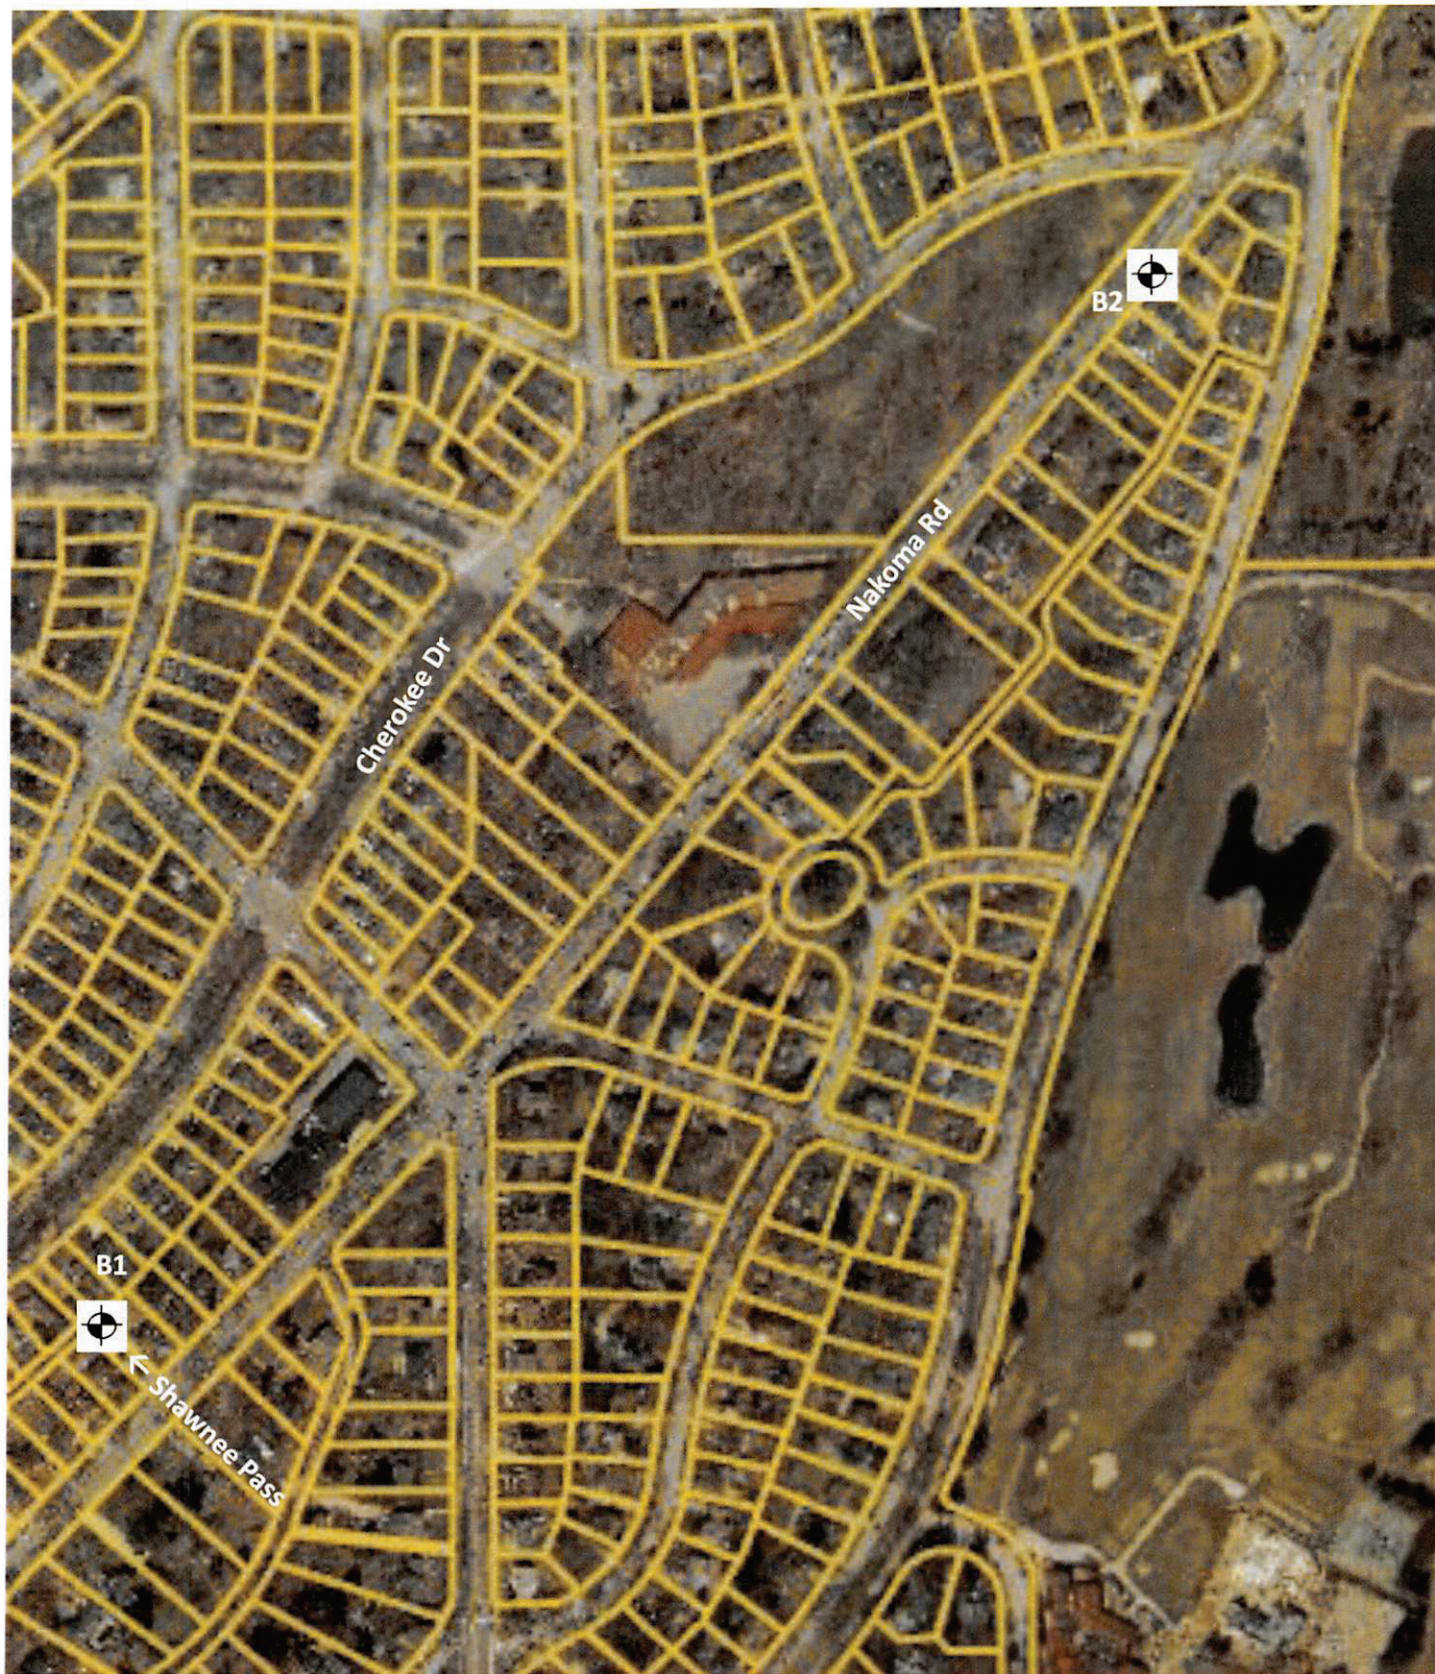

Legend

✕ Denotes boring location

Notes

1. Soil borings performed by America's Drilling Co. in August 2024
2. Boring locations are approximate



Scale: Reduced

Job No.
C24051-13

Date:
10/2024

CGC, Inc.

SOIL BORING LOCATION MAP
Nakoma Rd & Shawnee Pass
Madison, Wisconsin



LOG OF TEST BORING

Project Nakoma Road and Shawnee Pass
 Shawnee: 150'NW of Nakoma, Near Centerline
 Location Madison, Wisconsin

Boring No. 1
 Surface Elevation (ft) 936±
 Job No. C24051-13
 Sheet 1 of 1

2921 Perry Street, Madison, WI 53713 (608) 288-4100, FAX (608) 288-7887

SAMPLE					VISUAL CLASSIFICATION and Remarks	SOIL PROPERTIES				
No.	THICKNESS (in.)	Rec (in.)	Moist	N		qu (qa) (tsf)	W	LL	PL	LOI
					3 in. Asphalt Pavement/3.5 in. Base Course					
1	10	M	9		FILL: Stiff Brown and Gray Clay Mixed with Sand and Gravel to 3'	(1.25)				
2	12	M	11		Medium Dense Sand with Silt and Gravel to 5'					
3	10	M	15		Medium Dense, Stratified Silty Fine SAND and Sandy SILT (SM/ML) (Possible Fill to 8')					
4	12	M	15							
5	10	M	14							
6	14	M	16							
					End of Boring at 15 ft					
					Backfilled with Bentonite Chips and Asphalt Patch					

WATER LEVEL OBSERVATIONS

While Drilling NW Upon Completion of Drilling 10 Min.
 Time After Drilling 12'
 Depth to Water 12'
 Depth to Cave in 12'

The stratification lines represent the approximate boundary between soil types and the transition may be gradual.

GENERAL NOTES

Start 8/14/24 End 8/14/24
 Driller ADC Chief CJ Rig 7822DT
 Logger BU Editor ESF
 Drill Method 2.25" HSA; Autohammer



LOG OF TEST BORING

Project Nakoma Road and Shawnee Pass
Nakoma: 225'SW of Cherokee, 15'SE of Centerline
Location Madison, Wisconsin

Boring No. 2
Surface Elevation (ft) 877±
Job No. C24051-13
Sheet 1 of 1

2921 Perry Street, Madison, WI 53713 (608) 288-4100, FAX (608) 288-7887

SAMPLE					VISUAL CLASSIFICATION and Remarks	SOIL PROPERTIES				
No.	Rec (in.)	Moist	N	Depth (ft)		qu (qa) (tsf)	W	LL	PL	LOI
					5.5 in. Asphalt Pavement/10 in. Base Course					
1	4	M	16		FILL: Medium Dense Brown Fine to Coarse Silty Sand and Gravel to 2.5' Stiff Brown Sandy Clay with Gravel to 5'					
2	12	M	7			(1.25)				
				5	Loose to Medium Dense, Brown SILT, Trace Sand and Clay (ML)					
3	14	M	10							
					Very Stiff, Light Brown Silty CLAY (CL-ML)					
4	14	M	26			(3.0)				
				10	Medium Dense to Very Dense, Brown SILT, Trace Sand and Clay (ML)					
5	14	M	29							
6	14	M	53							
				15	End of Boring at 15 ft Backfilled with Bentonite Chips and Asphalt Patch					
				20						

WATER LEVEL OBSERVATIONS

While Drilling ☒ NW Upon Completion of Drilling _____
Time After Drilling _____
Depth to Water _____
Depth to Cave in _____

The stratification lines represent the approximate boundary between soil types and the transition may be gradual.

GENERAL NOTES

Start 8/14/24 End 8/14/24
Driller ADC Chief DB Rig D-50
Logger PB Editor ESF
Drill Method 2.25" HSA; Autohammer