



PLAN VIEW

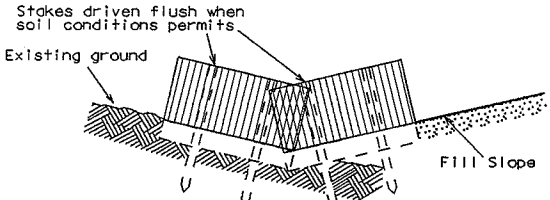


FRONT ELEVATION

EROSION BALES AT TOE OF SLOPE WHEN EXISTING GROUND SLOPES TOWARD FILL SLOPE

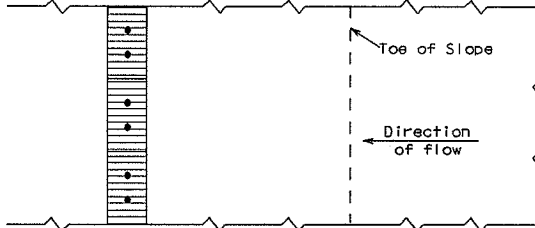


PLAN VIEW

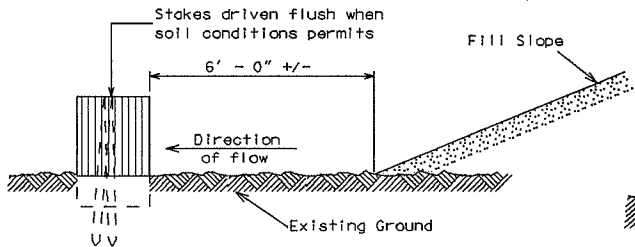


FRONT ELEVATION

EROSION BALES AT TOE OF SLOPE WHEN EXISTING GROUND SLOPES AWAY FROM FILL SLOPE


Wood Stakes (2 per Bale)
Nominal 2" x 2" x 30" min.
length or equivalent.

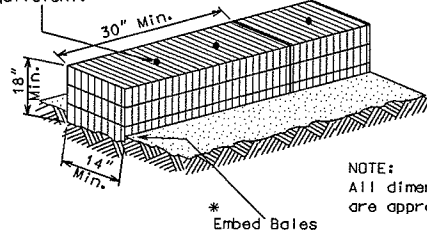


DETAIL OF EROSION BALE INSTALLATION

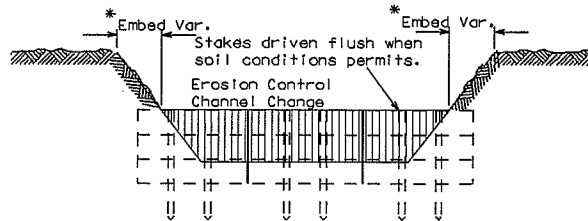


EROSION CONTROL CHANNEL CHANGE

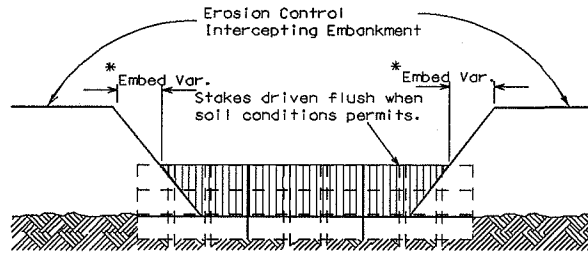

EROSION CONTROL INTERCEPTING EMBANKMENT



PLAN VIEW

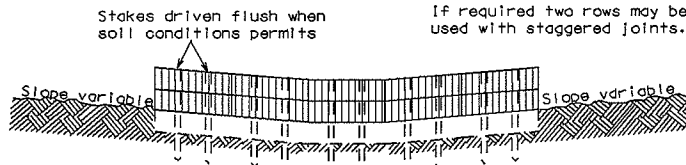

FRONT ELEVATION

EROSION BALES ACROSS DITCH BOTTOM

GENERAL NOTES


DETAILS OF CONSTRUCTION, MATERIALS AND WORKMANSHIP NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND THE APPLICABLE SPECIAL PROVISIONS.

BALES SHALL BE PLACED END TO END OR OVERLAPPING AT RIGHT ANGLES TO THE DIRECTION OF FLOW AND FAR ENOUGH UP THE SIDES OF THE DITCH TO PREVENT ERODING AROUND ENDS.


BALES SHALL BE PLACED WITH TWINE OR TIE WIRES PARALLEL TO THE GROUND.

STAKES TO BE BATTERED IN OPPOSITE DIRECTIONS.

* AS DETERMINED BY THE ENGINEER.

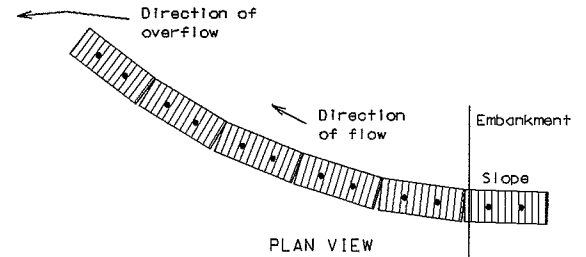

PLAN VIEW

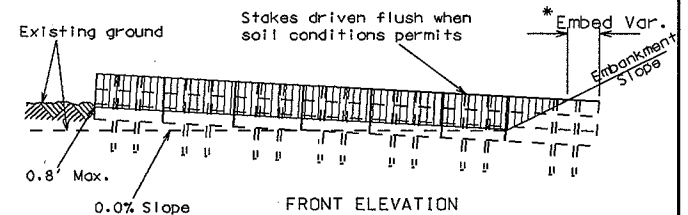

FRONT ELEVATION

EROSION BALES AT TOE OF SLOPE

2004

CITY OF MADISON
ENGINEERING DIVISION

TYPICAL INSTALLATIONS
OF EROSION BALES

STANDARD DETAIL DRAWING 1.03

1.03