ACOUSTICA 402 I


drawn by: Jim Whitney checked by: Jim Whitney

6/5/20 project no.

sheet 1 of 1

file name: ceiling plan—A1.dwg

EXHIBIT A CONTRACT NO. 8879 PROJECT NO. 12857

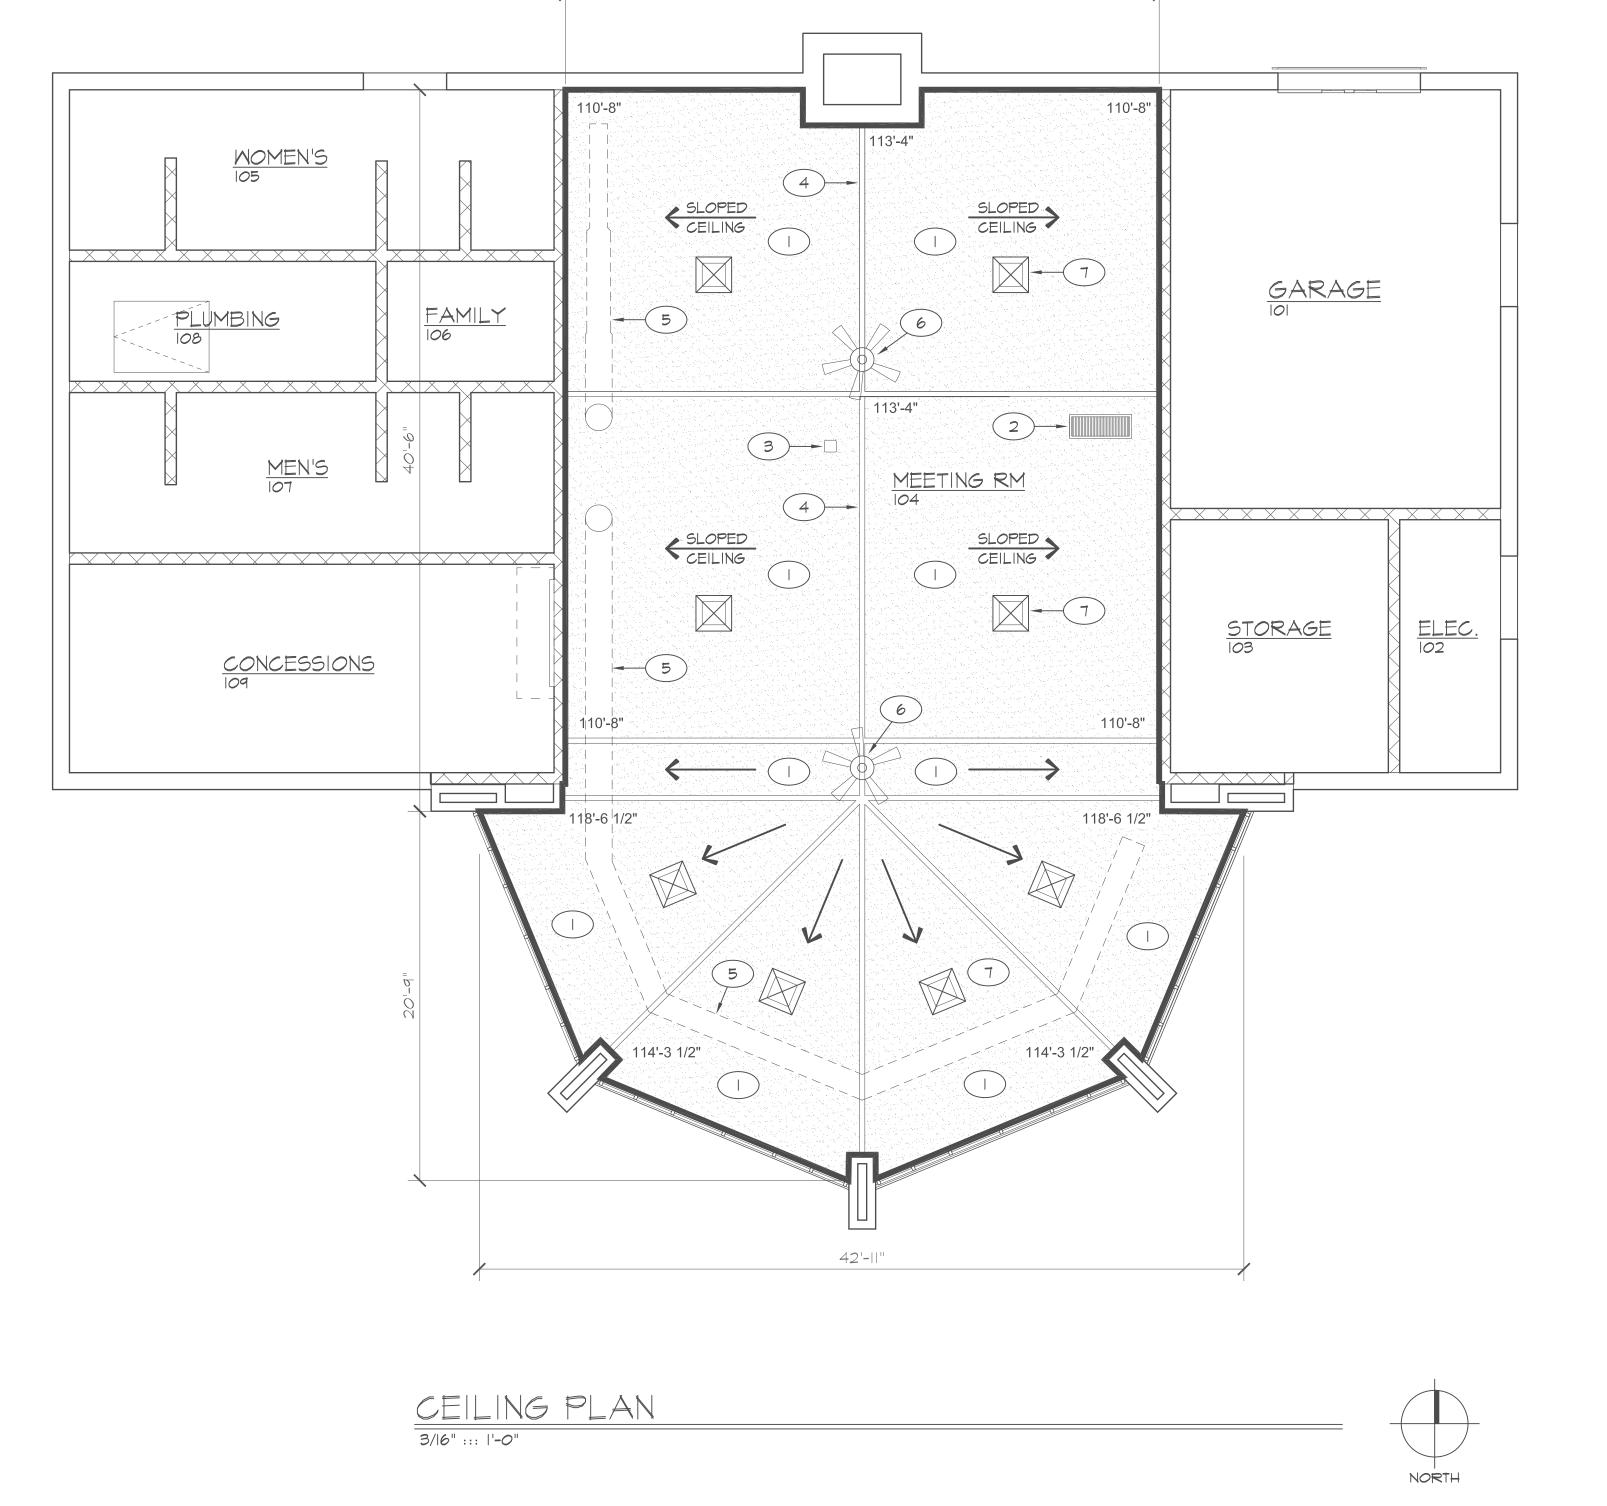

33'-4"

LEGEND

1) 25mm TO 30mm ACOUSTICAL PLASTER SYSTEM W/ PRE-COATED SOUND ABSORBING PANELS ON EXISTING GYPSUM BOARD CEILING, THE SYSTEM SHALL BE NOT LESS THAN 25mm THICKNESS (APPROXIMATELY 1,960 SQ. FT.)

2 REMOVE AND EXTEND EXISTING RETURN-AIR DUCT & GRILL TO SURFACE MOUNT FLUSH ON ACOUSTICAL PLASTER SYSTEM

3 REMOVE AND EXTEND EXISTING WIRELESS ACCESS POINT DEVICE TO SURFACE MOUNT ON ACOUSTICAL PLASTER SYSTEM

(4) EXISTING FALSE WOOD BEAMS TO REMAIN

5 EXISTING SUSPENDED ROUND DUCTWORK W/ SUSPENSION CABLES TO REMAIN

(6) EXISTING CEILING FAN TO REMAIN

7 REMOVE AND EXTEND EXISTING LIGHT FIXTURES & BACKBOX TO SURFACE MOUNT ON ACOUSTICAL PLASTER SYSTEM

GENERAL NOTES

- I) THE ACOUSTICAL PLASTER SYSTEM INCLUDES PROPRIETARY SOUND ABSORBING PLASTER BASE COAT AND FINISH COAT APPLIED TO PRE-COATED SOUND ABSORBING PANELS ADHERED TO SUBSTRATE
- 2) CORNER BEADS, TERMINATIONS, OR OTHER TRIM PIECES SHALL BE VINYL PROPRIETARY BEADS BY THE ACOUSTICAL PLASTER SYSTEM MANUFACTURER
- 3) THE EXISTING PAINTED DRYWALL CEILING SHALL BE PRIMED W/ SHERWIN WILLIAMS PREPRITE BONDING PRIMER OR EQUAL

The construction window time line for work at the facility is on November 5, 2020 through December 11, 2020. All on-site work needs to be completed during this time.