




FOREST HILL CEMETERY - JOHN CATLIN CHAPEL ROOF REPLACEMENT

CITY OF MADISON CONTRACT # 7478

THE FOLLOWING GENERAL NOTES SHALL APPLY :

- ALL DESIGN AND CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE STATE OF WISCONSIN BUILDING CODE LATEST EDITION.
- CONTRACTOR IS RESPONSIBLE FOR VERIFICATION OF, AND COORDINATION WITH, ALL DIMENSIONS SHOWN ON THESE DRAWINGS RELATIVE TO EXISTING CONDITIONS PRIOR TO BEGINNING WORK.
- CONTRACTOR SHALL REPORT IMMEDIATELY TO THE ARCHITECT ANY DIMENSION(S) OR DISCREPANCIES VERBALLY, A WRITTEN REPORT SHOULD PROMPTLY FOLLOW. CONTRACTOR SHALL CEASE WORK IN THE AFFECTED AREA UNTIL DIRECTED BY THE ARCHITECT.
- THE CONTRACTOR SHALL PROVIDE ALL METHODS AND EQUIPMENT FOR PROTECTING THE BUILDING, ALL MATERIALS, AND PERSONNEL FROM FIRE OR OTHER DAMAGE PRIOR TO STARTING. THE CONTRACTOR SHALL SUBMIT THE APPROVED METHODS AND EQUIPMENT IN WRITING FOR THE OWNER AND ARCHITECT'S REVIEW PRIOR TO STARTING WORK.
- THE CONTRACTOR SHALL COMPLY WITH ALL SAFETY AND HEALTH LAWS AND REGULATIONS.
- THE CONTRACTOR SHALL PROVIDE ALL SHORING, BRACING, SHEATHING, REQUIRED FOR THE SAFETY AND PROPER EXECUTION OF THE WORK.
- EXECUTION OF THE WORK WILL INVOLVE CONSIDERATION FOR ALLOWING THE OWNER TO CONTINUE THE OPERATION OF THE BUILDING AND THE BUSINESS IN THE FACILITY AND ADJACENT FACILITIES. PRIOR TO THE AWARD OF THE CONTRACT, THE CONSTRUCTION SCHEDULE PREPARED BY THE CONTRACTOR SHALL BE SUBMITTED TO THE ARCHITECT AND SHALL BE COORDINATED WITH THE FACILITIES DEPARTMENT. OWNER'S APPROVAL OF THE PROPOSED SCHEDULE SHALL SUPERCEDE THE CONTRACT, PROVIDED THE OVERALL TIME IS NOT CHANGED.
- THE CONTRACTOR SHALL REVIEW ALL EXISTING CONDITIONS TO DETERMINE ALL SERVICES (ELECTRICAL, MECHANICAL AND PLUMBING) AFFECTED BY THE REPAIR WORK. THE CONTRACTOR SHALL MAKE NECESSARY TEMPORARY CONNECTIONS TO MAINTAIN EXISTING SERVICES TO ALL AREAS OF THE BUILDING DIRECTLY AND INDIRECTLY AFFECTED BY THE WORK. THE CONTRACTOR SHALL SUBMIT METHODS AND SCHEDULE OF CONNECTIONS TO THE OWNER FOR APPROVAL PRIOR TO BEGINNING WORK.
- AS THE WORK PROGRESSES, THE CONTRACTOR SHALL PRODUCE "AS-BUILT" DRAWINGS FOR THE INSTALLATION OF ALL REPAIR ITEMS UNDER THE CONTRACT. THE ARCHITECT WILL PROVIDE THE GENERAL CONTRACTOR WITH A SET OF REPRODUCIBLE PLANS FOR THIS PURPOSE. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING THE AS-BUILT DRAWINGS ACCORDING TO THE JOB PROGRESS. **EACH PAY REQUEST SUBMITTED BY THE CONTRACTOR SHALL BE ACCOMPANIED BY A COPY OF THE UPDATED AS-BUILT DRAWINGS.**
- THE CONTRACTOR SHALL CALL "DIGGER'S HOTLINE" AT 800-242-8511, 48 HOURS (EXCLUDING WEEKENDS AND/OR HOLIDAYS) PRIOR TO DIGGING ANY EXCAVATION. "DIGGER'S HOTLINE" WILL CONTACT UTILITY COMPANIES TO LOCATE AND MARK THEIR UNDERGROUND FACILITIES. NO SUCH WORK SHALL COMMENCE PRIOR TO VERIFICATION THAT ALL UTILITIES HAVE RESPONDED.
- PROTECT TREES, SHRUBS, LAWNS, AND OTHER FEATURES WITHIN PROJECT LIMITS. RESTORE DAMAGED FEATURES TO ORIGINAL CONDITION.

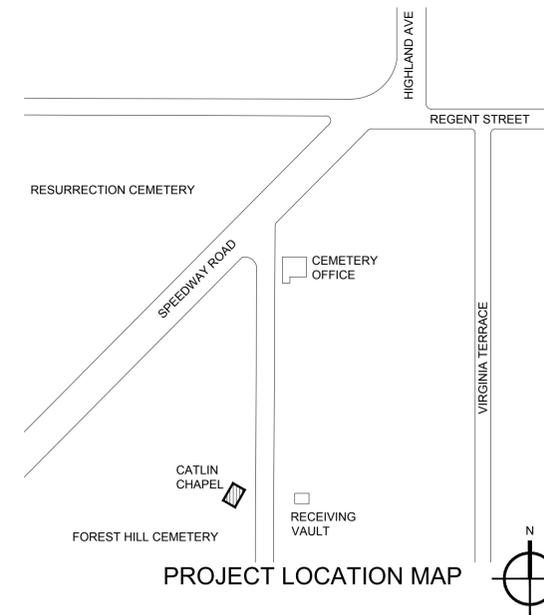


SHEET INDEX

TS TITLE SHEET

ARCHITECTURAL

- A1 CATLIN CHAPEL - ROOF PLAN
- A2 DETAILS
- A3 DETAILS
- A4 DETAILS
- A5 DETAILS
- A6 DETAILS

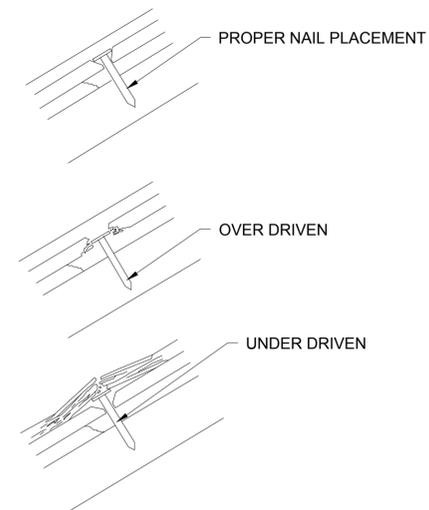

1
TS
PROPER FASTENER DEPTH
SCALE: N.T.S.

FOREST HILL CEMETERY - JOHN CATLIN CHAPEL
ROOF REPLACEMENT
CITY OF MADISON CONTRACT # 7478

1 SPEEDWAY ROAD
MADISON, WI 53705



InSite Consulting Architects
115 E. Main / STE 200
Madison, Wisconsin 53703
608-204-0825
866-297-1762 (fax)
info@icsarc.com

INSITE CONSULTING ARCHITECTS


TITLE SHEET

3/27/2015
ISSUE FOR BID


TS

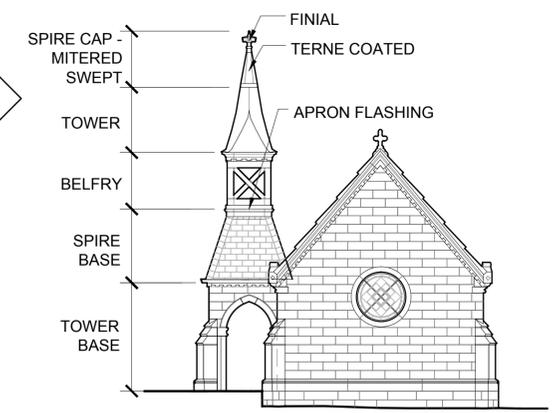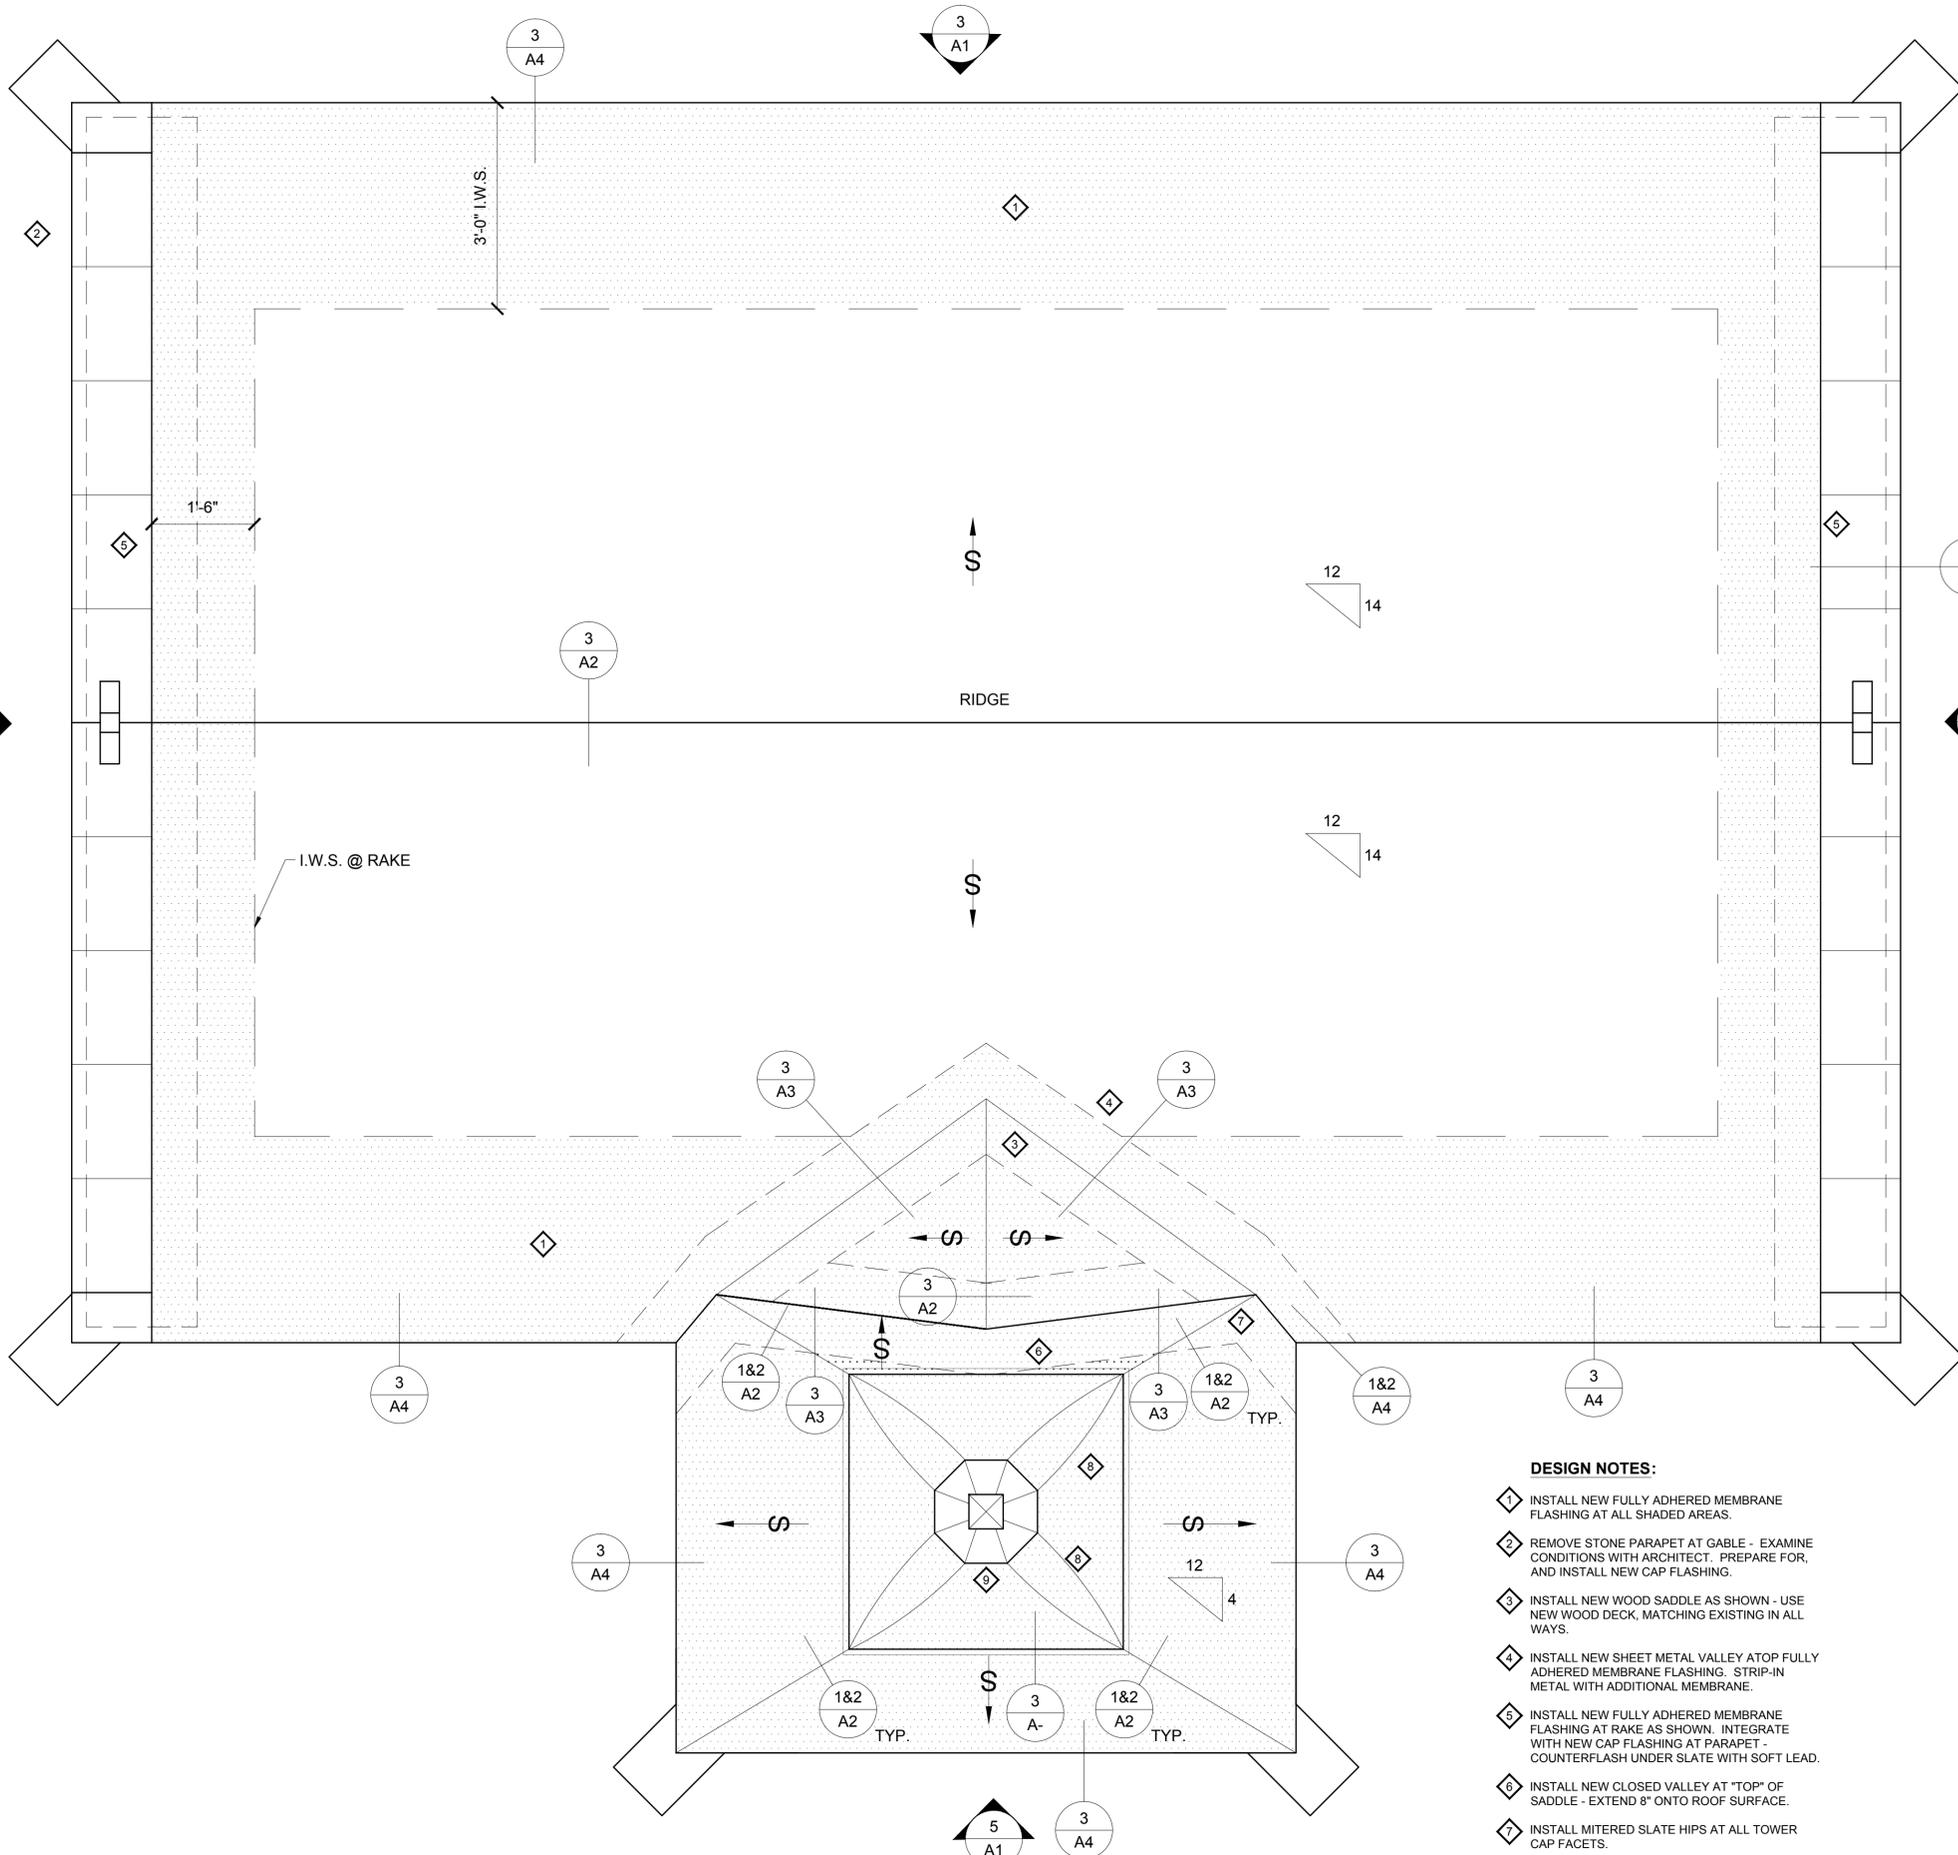


2 EAST ELEVATION
 SCALE: 1/8" = 1'-0"

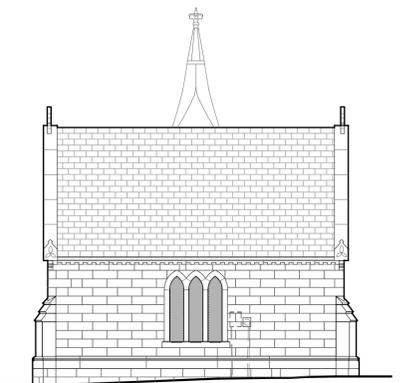

3 NORTH ELEVATION
 SCALE: 1/8" = 1'-0"

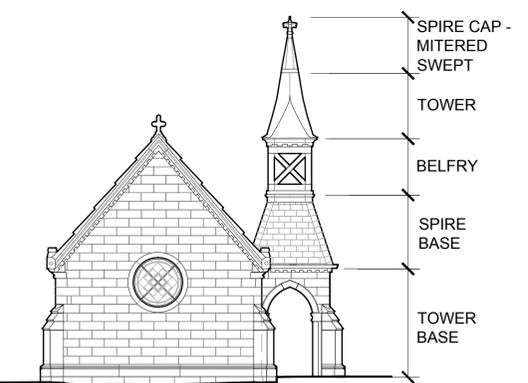


4 WEST ELEVATION
 SCALE: 1/8" = 1'-0"

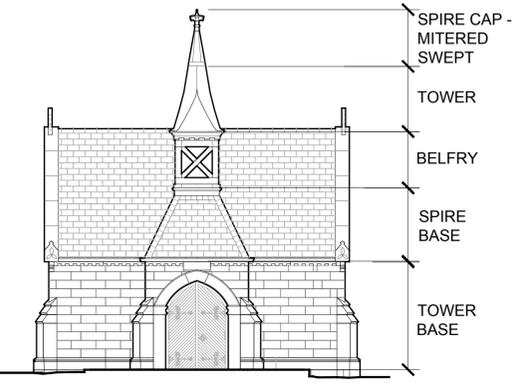


5 SOUTH ELEVATION
 SCALE: 1/8" = 1'-0"

- DESIGN NOTES:**
- 1 INSTALL NEW FULLY ADHERED MEMBRANE FLASHING AT ALL SHADED AREAS.
 - 2 REMOVE STONE PARAPET AT GABLE - EXAMINE CONDITIONS WITH ARCHITECT. PREPARE FOR, AND INSTALL NEW CAP FLASHING.
 - 3 INSTALL NEW WOOD SADDLE AS SHOWN - USE NEW WOOD DECK, MATCHING EXISTING IN ALL WAYS.
 - 4 INSTALL NEW SHEET METAL VALLEY ATOP FULLY ADHERED MEMBRANE FLASHING. STRIP-IN METAL WITH ADDITIONAL MEMBRANE.
 - 5 INSTALL NEW FULLY ADHERED MEMBRANE FLASHING AT RAKE AS SHOWN. INTEGRATE WITH NEW CAP FLASHING AT PARAPET - COUNTERFLASH UNDER SLATE WITH SOFT LEAD.
 - 6 INSTALL NEW CLOSED VALLEY AT "TOP" OF SADDLE - EXTEND 8" ONTO ROOF SURFACE.
 - 7 INSTALL MITERED SLATE HIP AT ALL TOWER CAP FACETS.
 - 8 INSTALL SWEPT SLATE HIP.
 - 9 REMOVE FINIAL AND REVIEW FOR CONSERVATION AND RESTORATION.

1 CATLIN CHAPEL - ROOF PLAN
 SCALE: 1/2" = 1'-0"

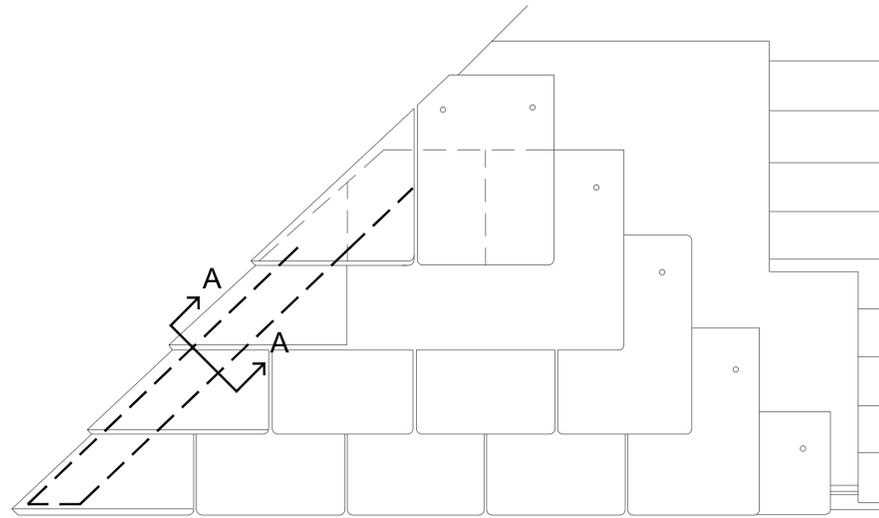


1
A2
DETAIL OF MITRED HIP
SCALE: N.T.S.

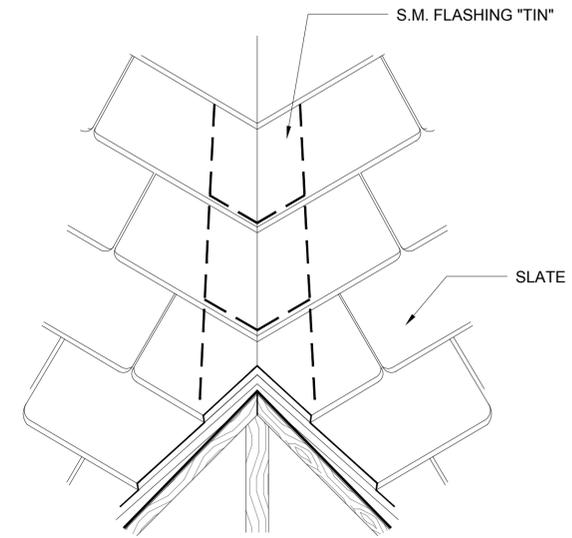


**SECTION
A-A**


2
A2
DETAIL OF MITRED HIP (A-A @ 1/A2)
SCALE: N.T.S.

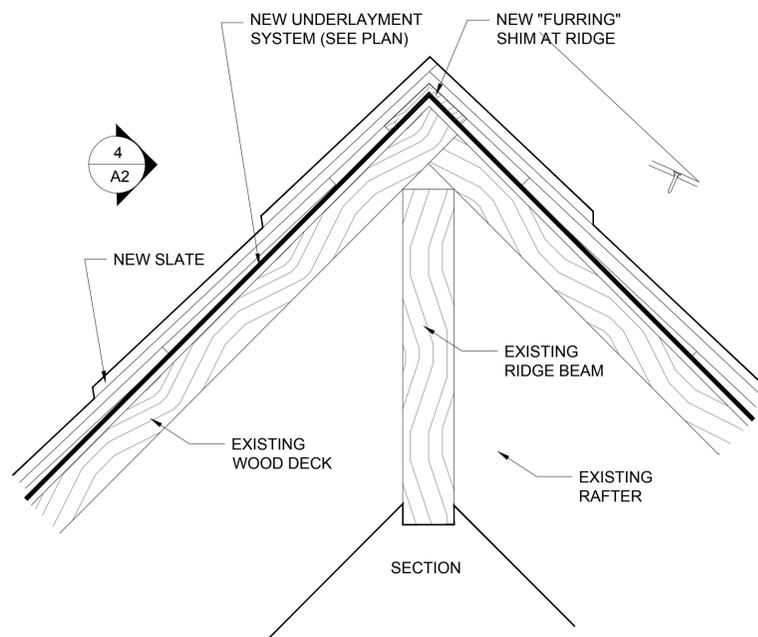

3
A2
STRIP SADDLE RIDGE DETAIL
SCALE: N.T.S.

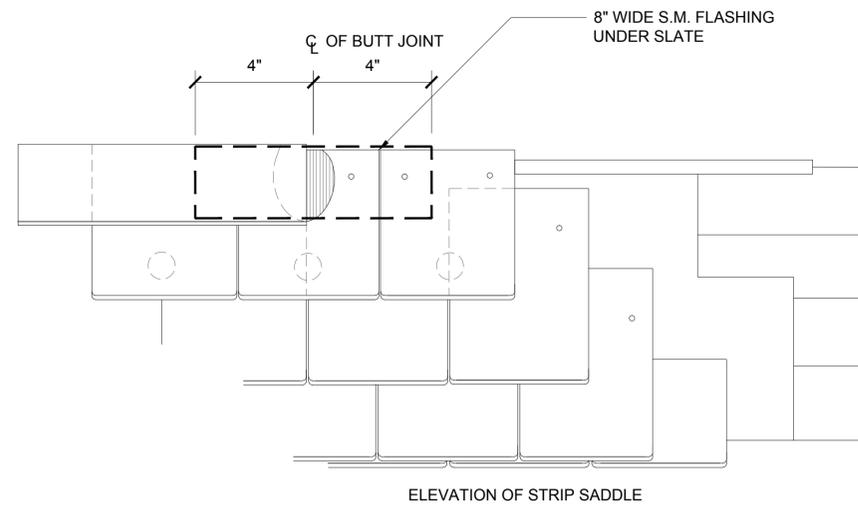


4
A2
VIEW OF STRIP SADDLE
SCALE: N.T.S.

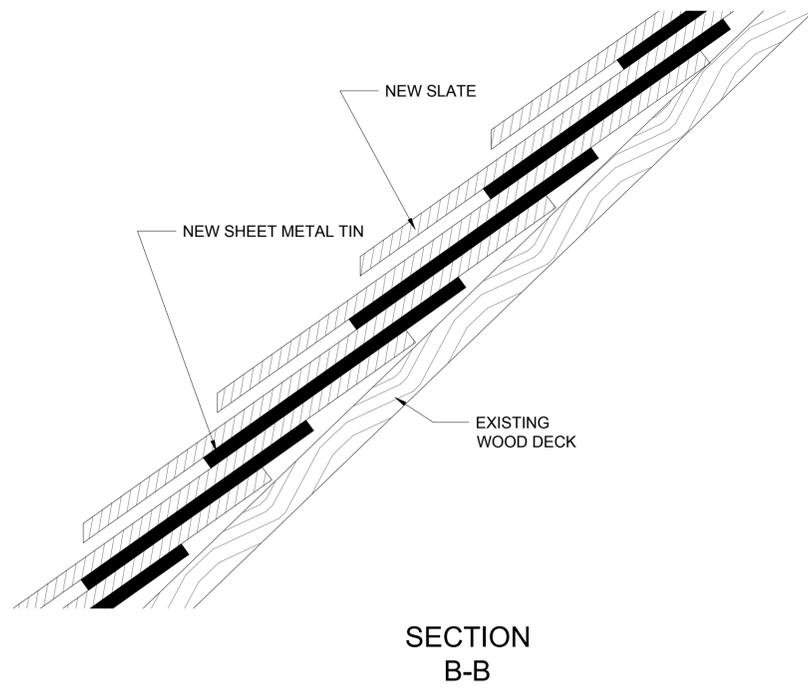


SECTION
B-B

1
A3
DETAIL OF CLOSED VALLEY (B-B- @ 3/A3)
SCALE: N.T.S.

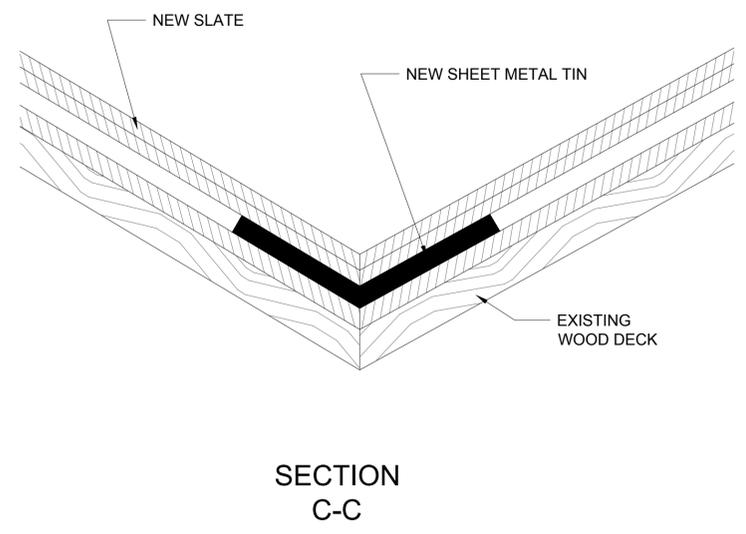


SECTION
C-C


2
A3
DETAIL OF CLOSED VALLEY (C-C @ 3/A3)
SCALE: N.T.S.

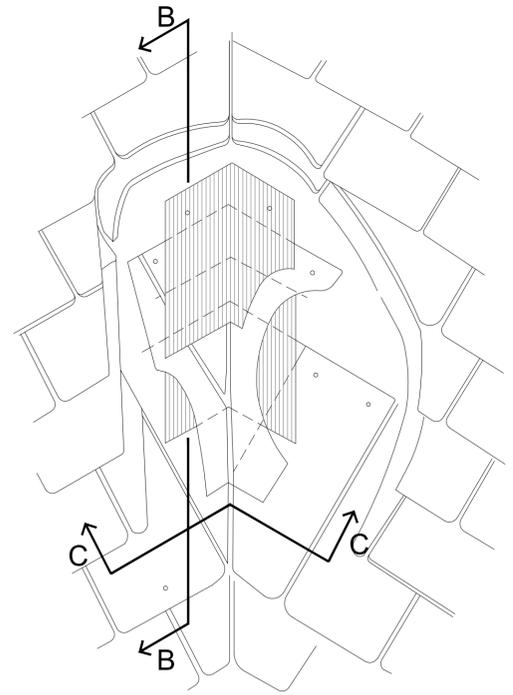


3
A3
DETAIL OF CLOSED VALLEY
SCALE: N.T.S.

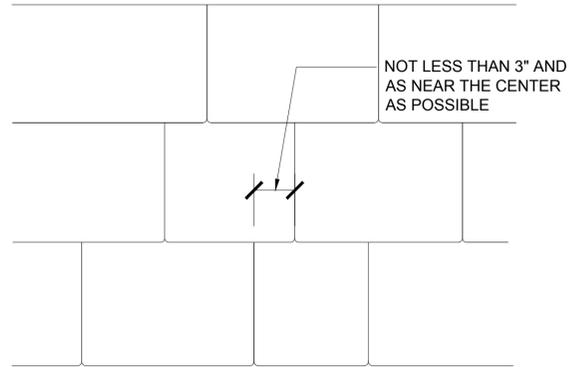

1
A4
PROPER JOINT LAYOUT
SCALE: N.T.S.

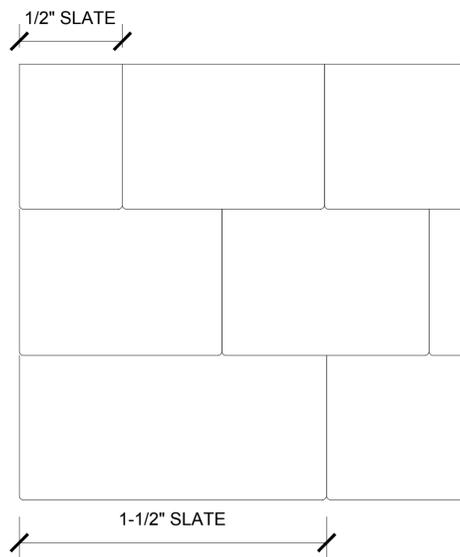

2
A4
STARTER SLATE LAYOUT
SCALE: N.T.S.

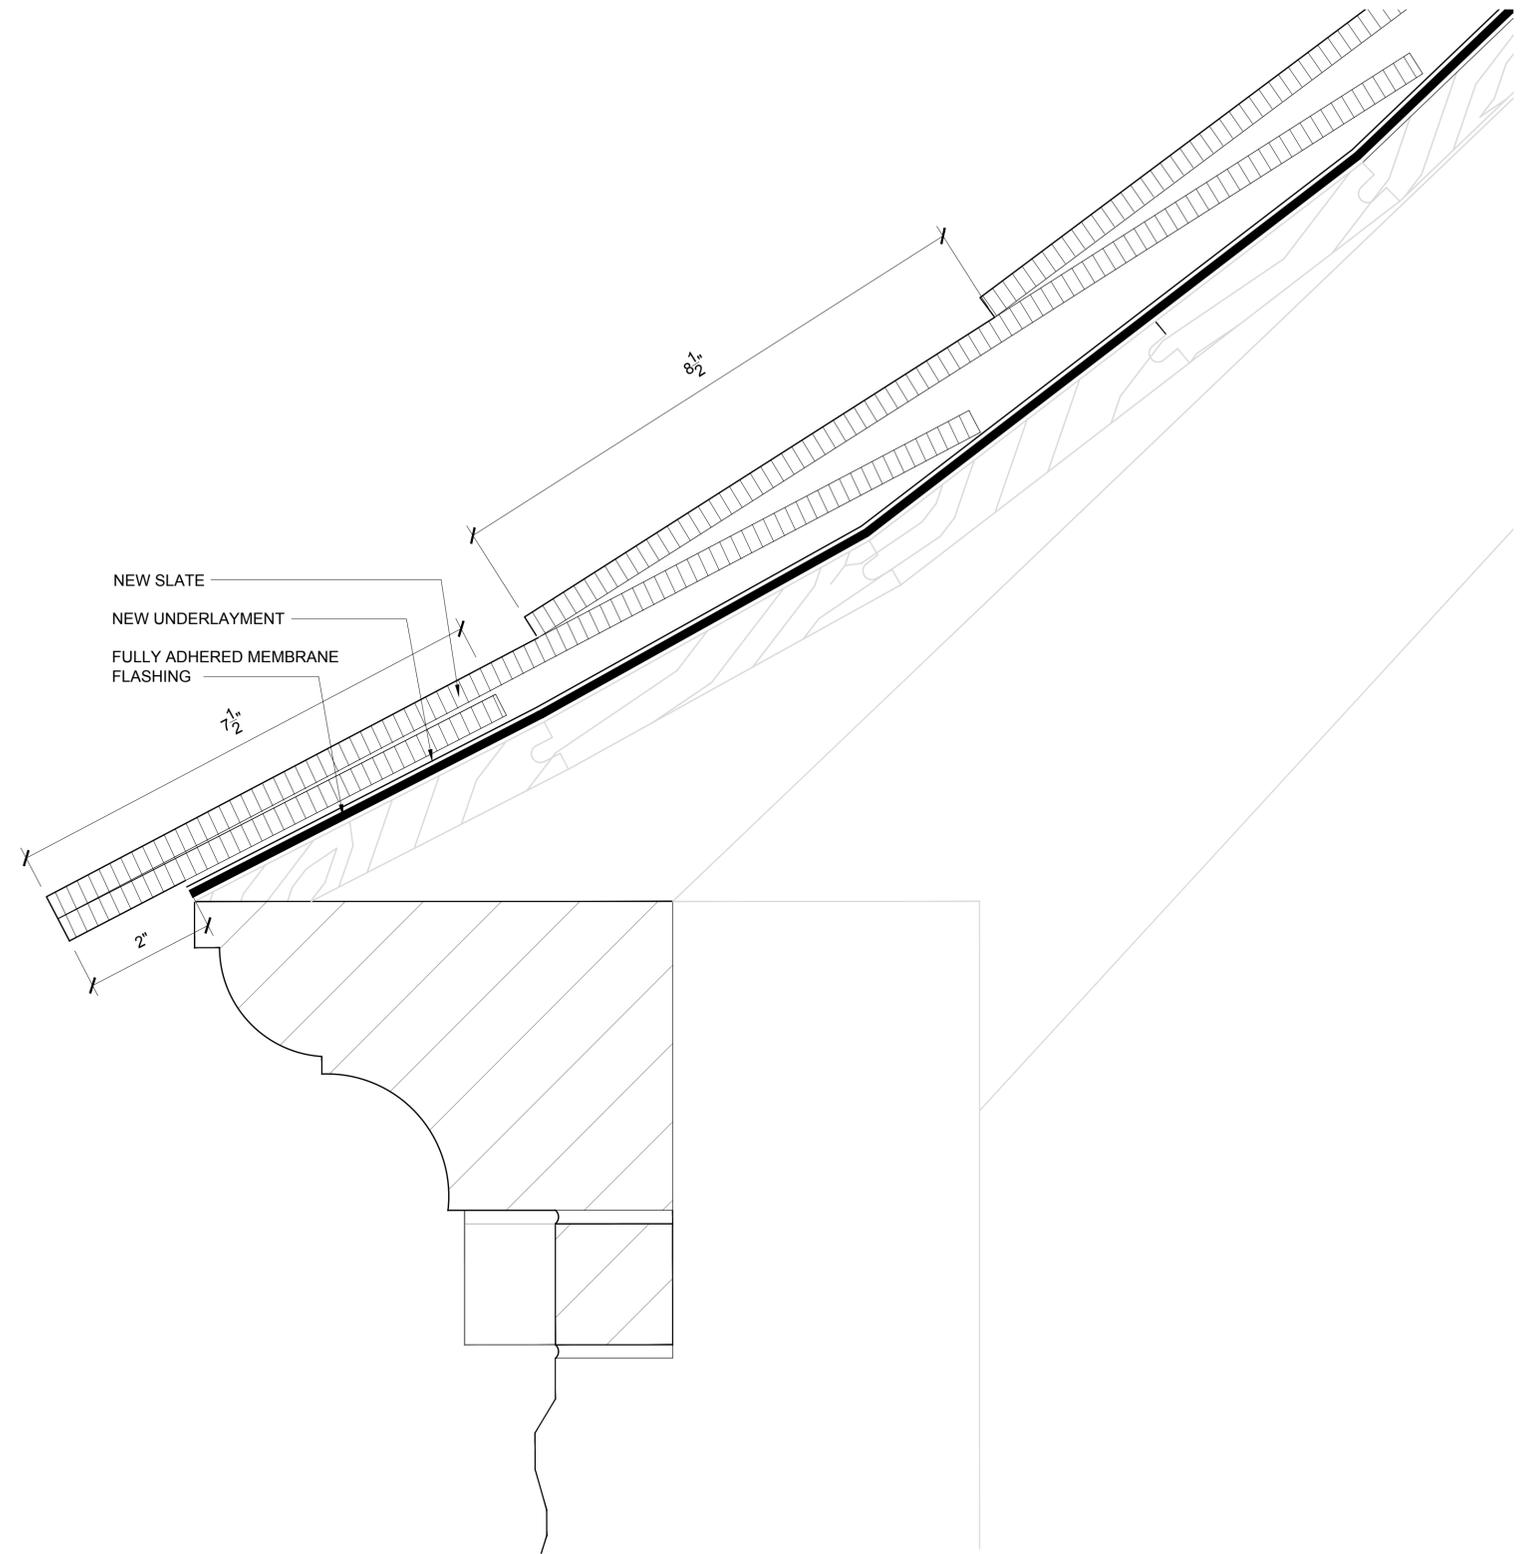

3
A4
SWEPT EAVE DETAIL
SCALE: N.T.S.



InSite Consulting Architects
115 E. Main / STE 200
Madison, Wisconsin 53703
608-204-0825
866-297-1762 (fax)
info@icsarc.com

INSITE CONSULTING ARCHITECTS


FOREST HILL CEMETERY - JOHN CATLIN CHAPEL
ROOF REPLACEMENT
CITY OF MADISON CONTRACT # 7478

1 SPEEDWAY ROAD
MADISON, WI 53705


DETAILS

3/27/2015
ISSUE FOR BID


A4

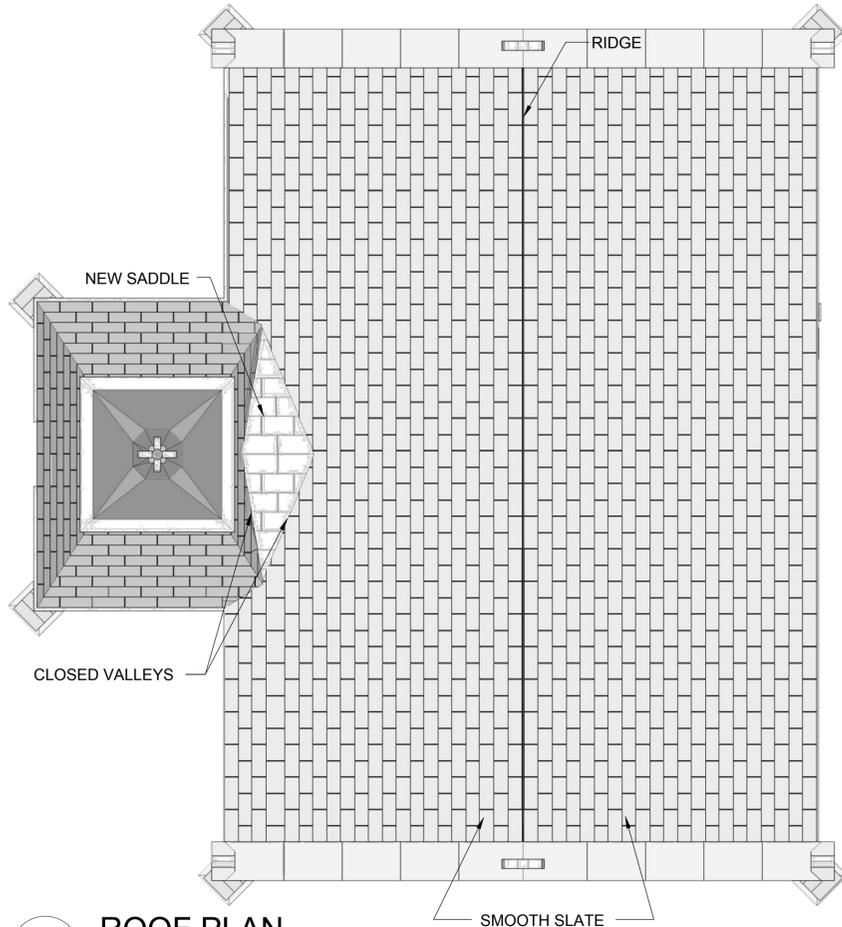


1 **ROOF PLAN**
A5 SCALE: N.T.S.

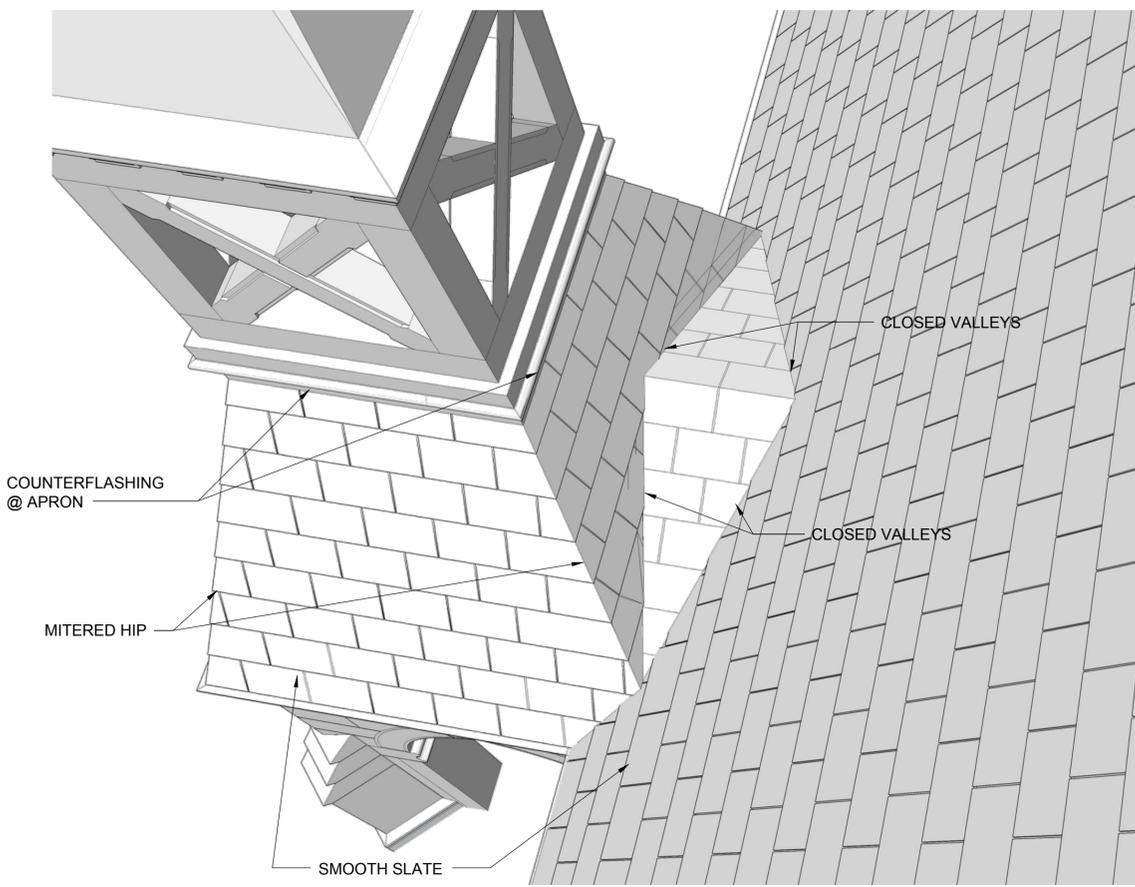


2 **SADDLE @ TOWER**
A5 SCALE: N.T.S.

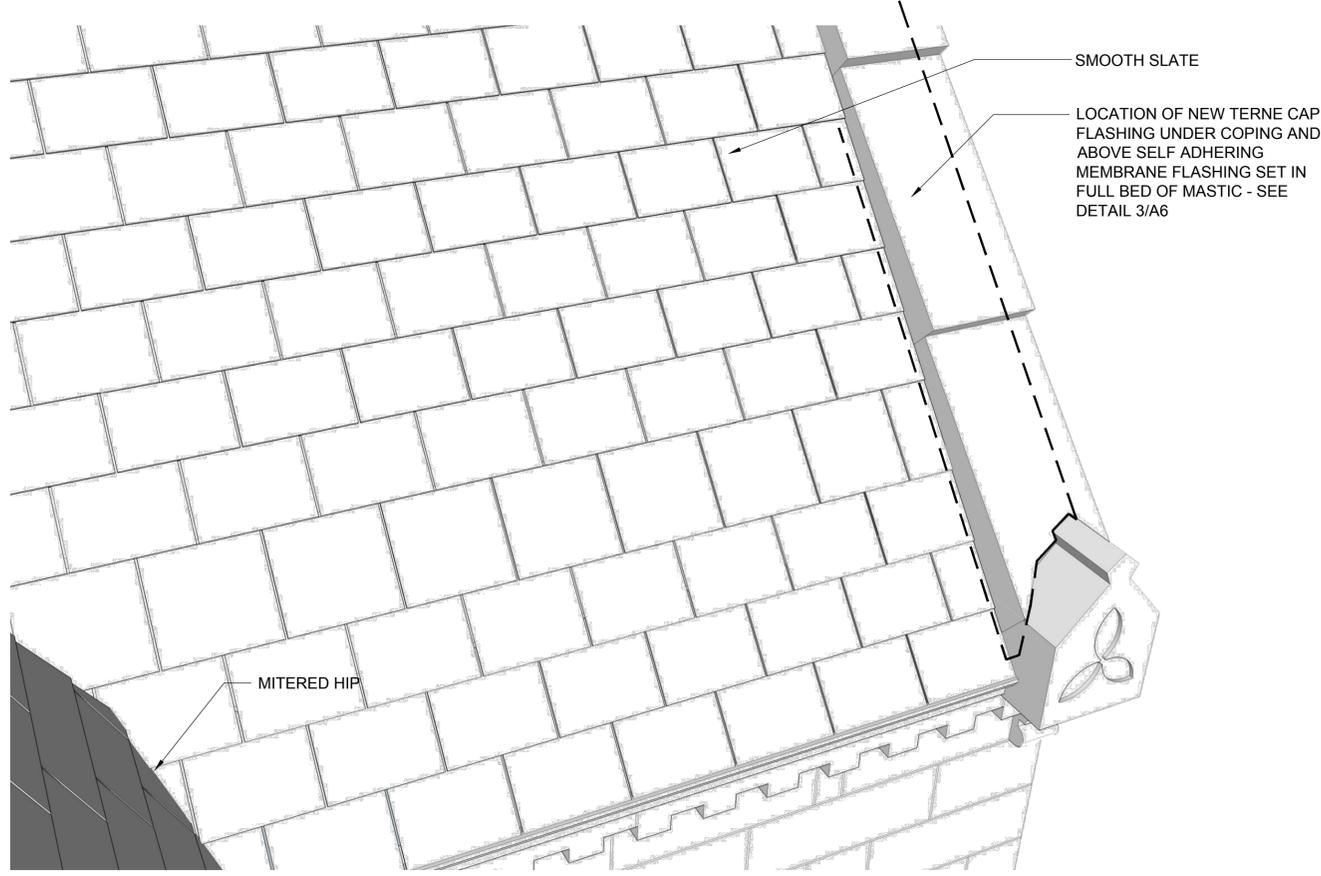


3 **RAKE DETAIL**
A5 SCALE: N.T.S.

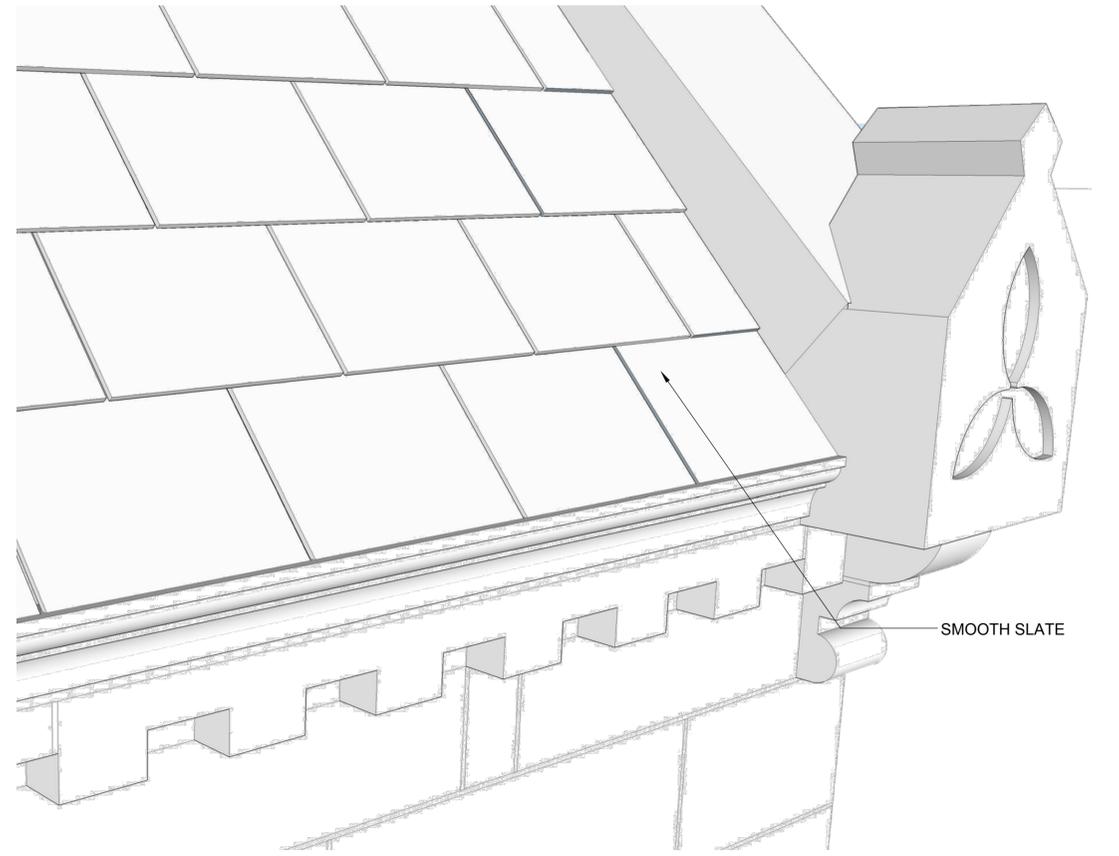


4 **EAVE DETAIL**
A5 SCALE: N.T.S.

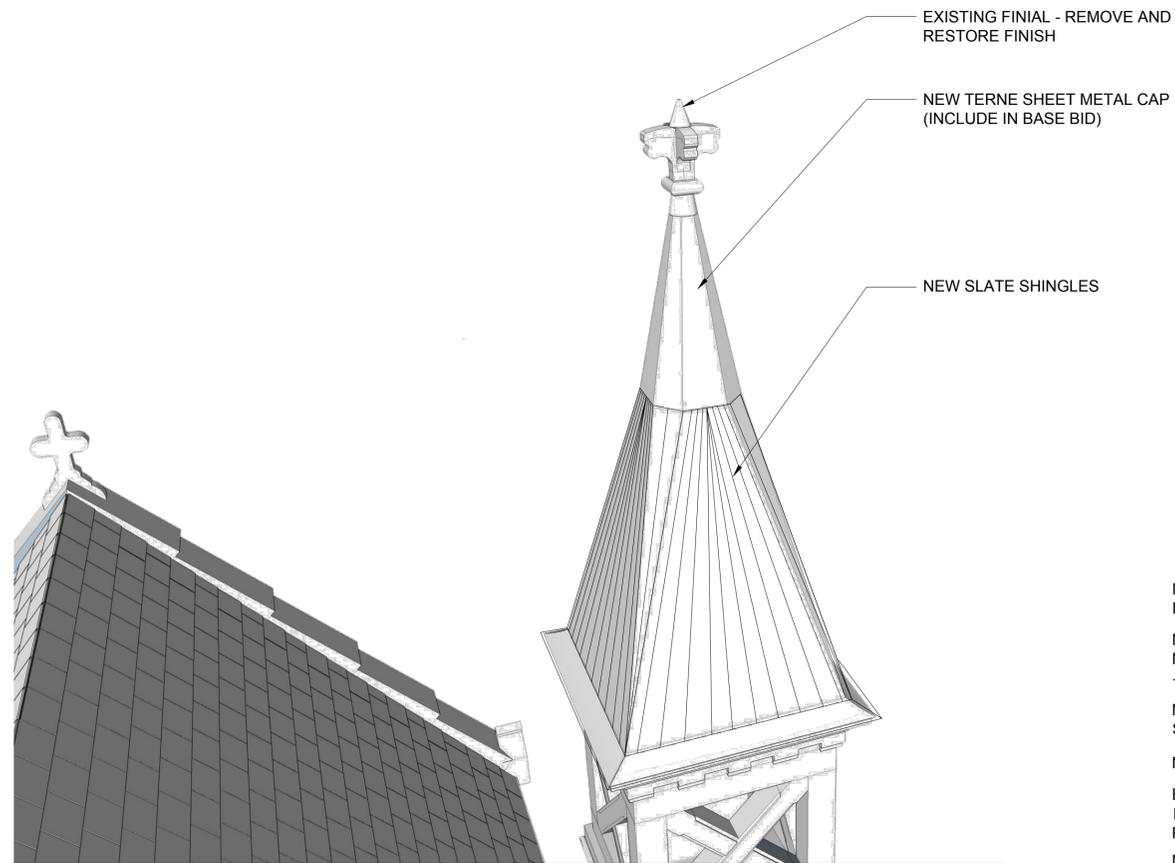

1 TOWER VIEW
 SCALE: N.T.S.

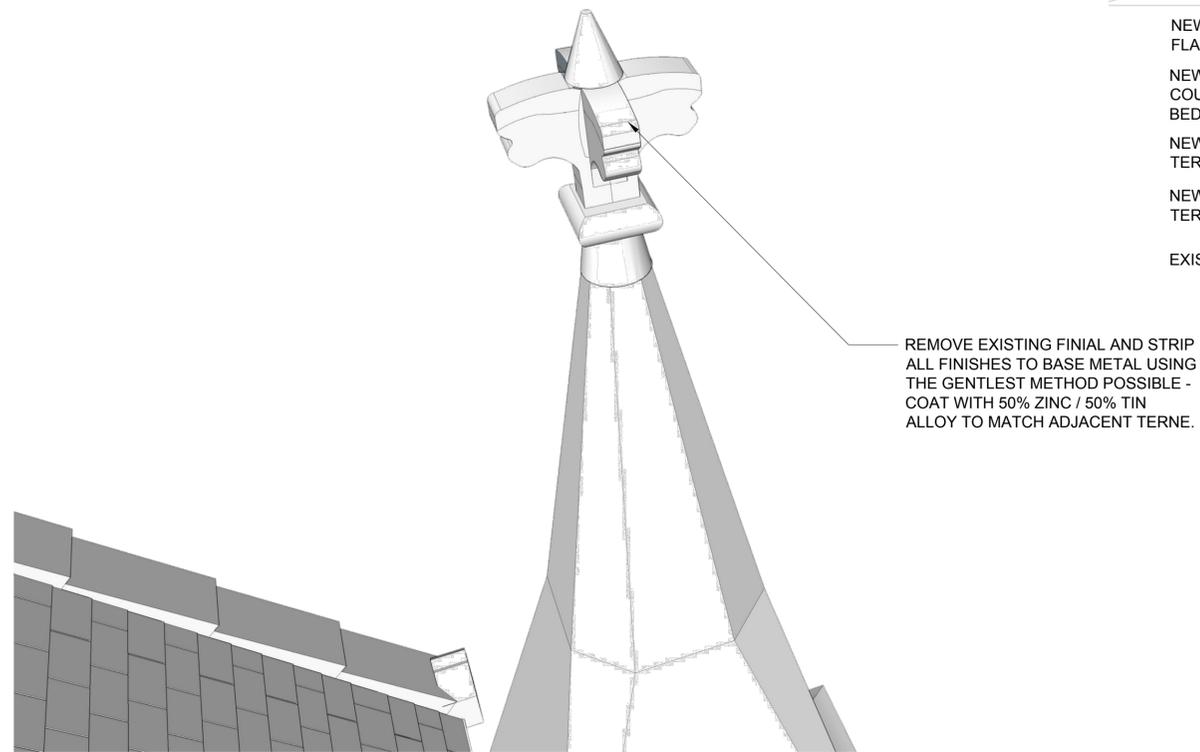

2 TOP OF TOWER VIEW
 SCALE: N.T.S.

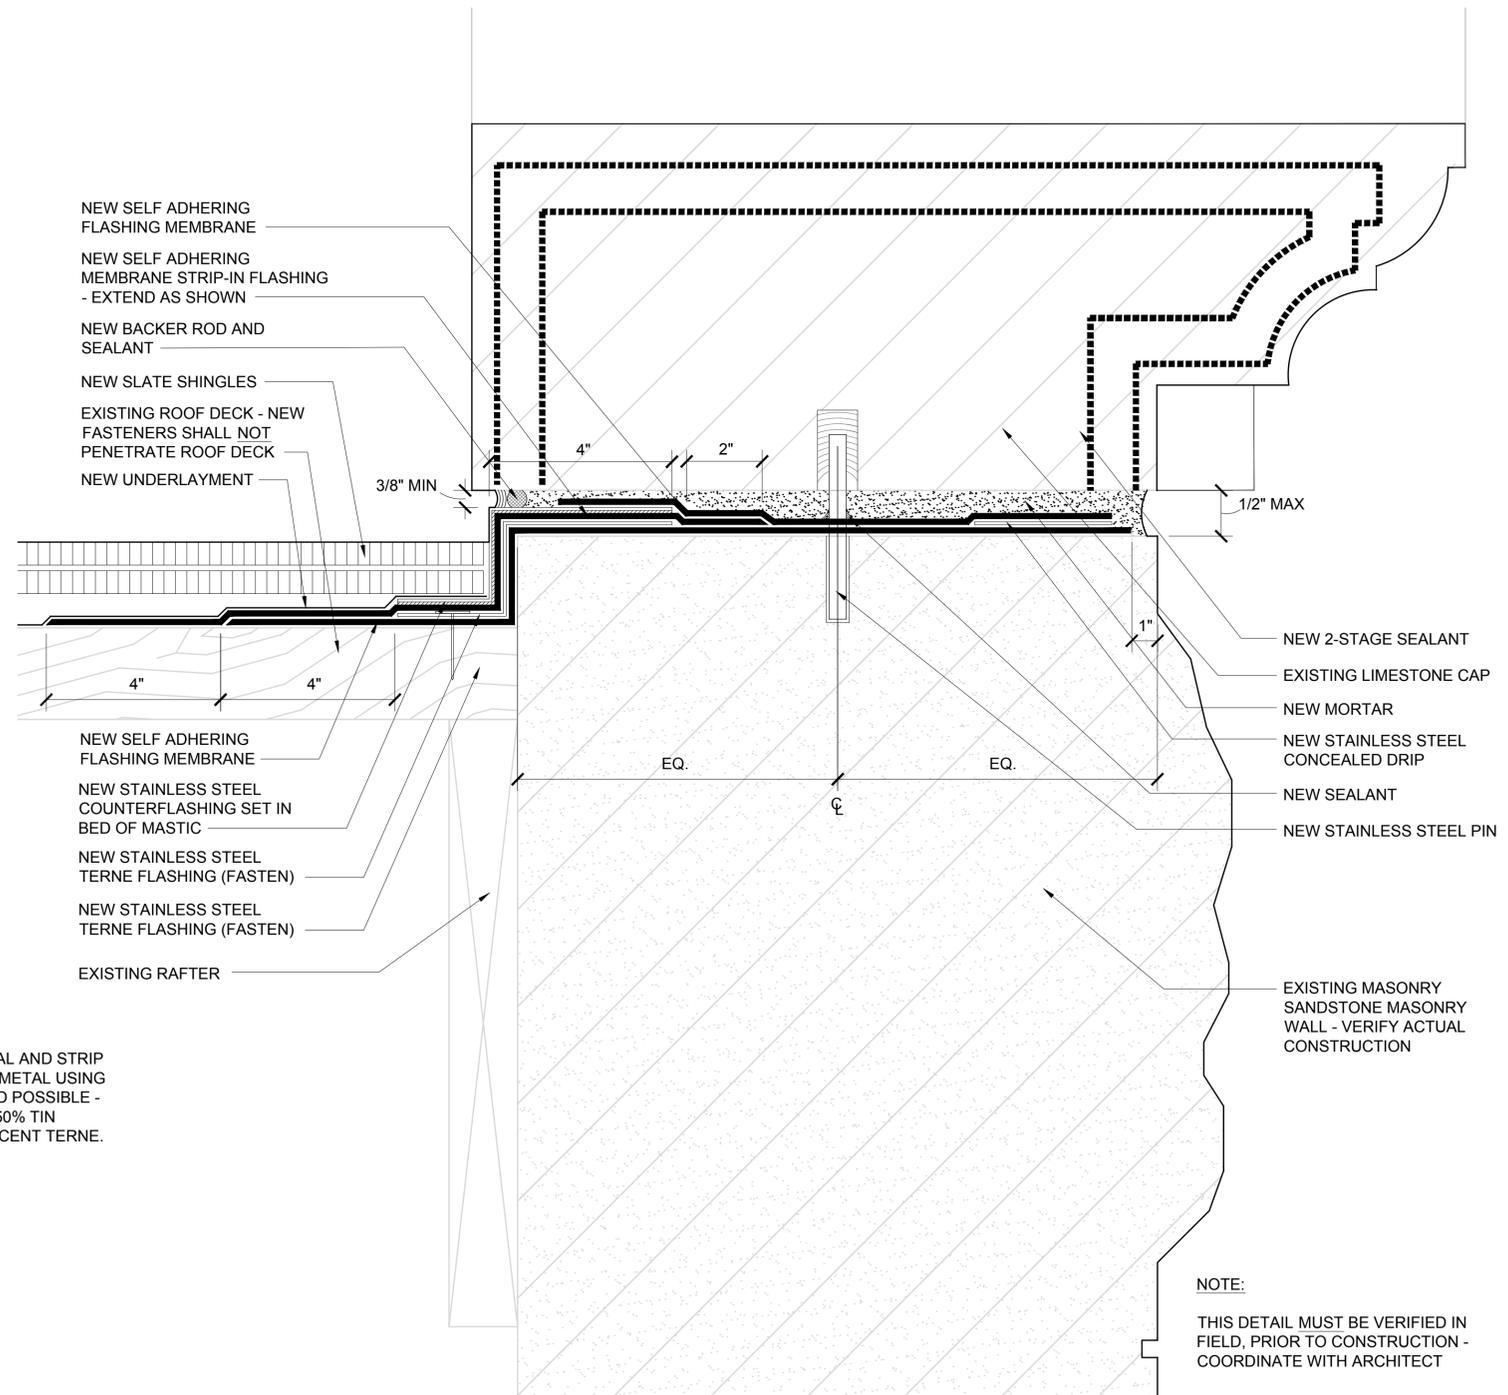

3 DETAIL AT GABLE / RAKE FLASHING
 SCALE: 6" = 1'-0"

NOTE:
 THIS DETAIL MUST BE VERIFIED IN FIELD, PRIOR TO CONSTRUCTION - COORDINATE WITH ARCHITECT