


PROPOSED FACILITY FOR:

ERIN SQUARE

801 SOUTH PARK STREET
MADISON, WISCONSIN


TJK TJK Design Build
634 West Main Street
Madison, WI 53703
DESIGNBUILD 608-257-1090 FAX 608-257-1092

TO OBTAIN LOCATIONS OF
PARTICIPANTS UNDERGROUND
FACILITIES BEFORE YOU
DIG IN WISCONSIN

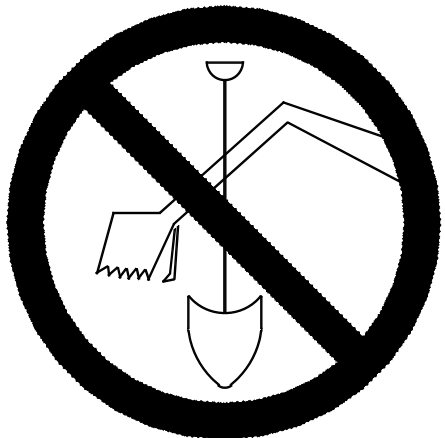

CALL DIGGERS HOTLINE
1-800-242-8511
TOLL FREE


WIS STATUTE 182.0175(1974)
REQUIRES MIN. 3 WORK DAYS
NOTICE BEFORE YOU EXCAVATE

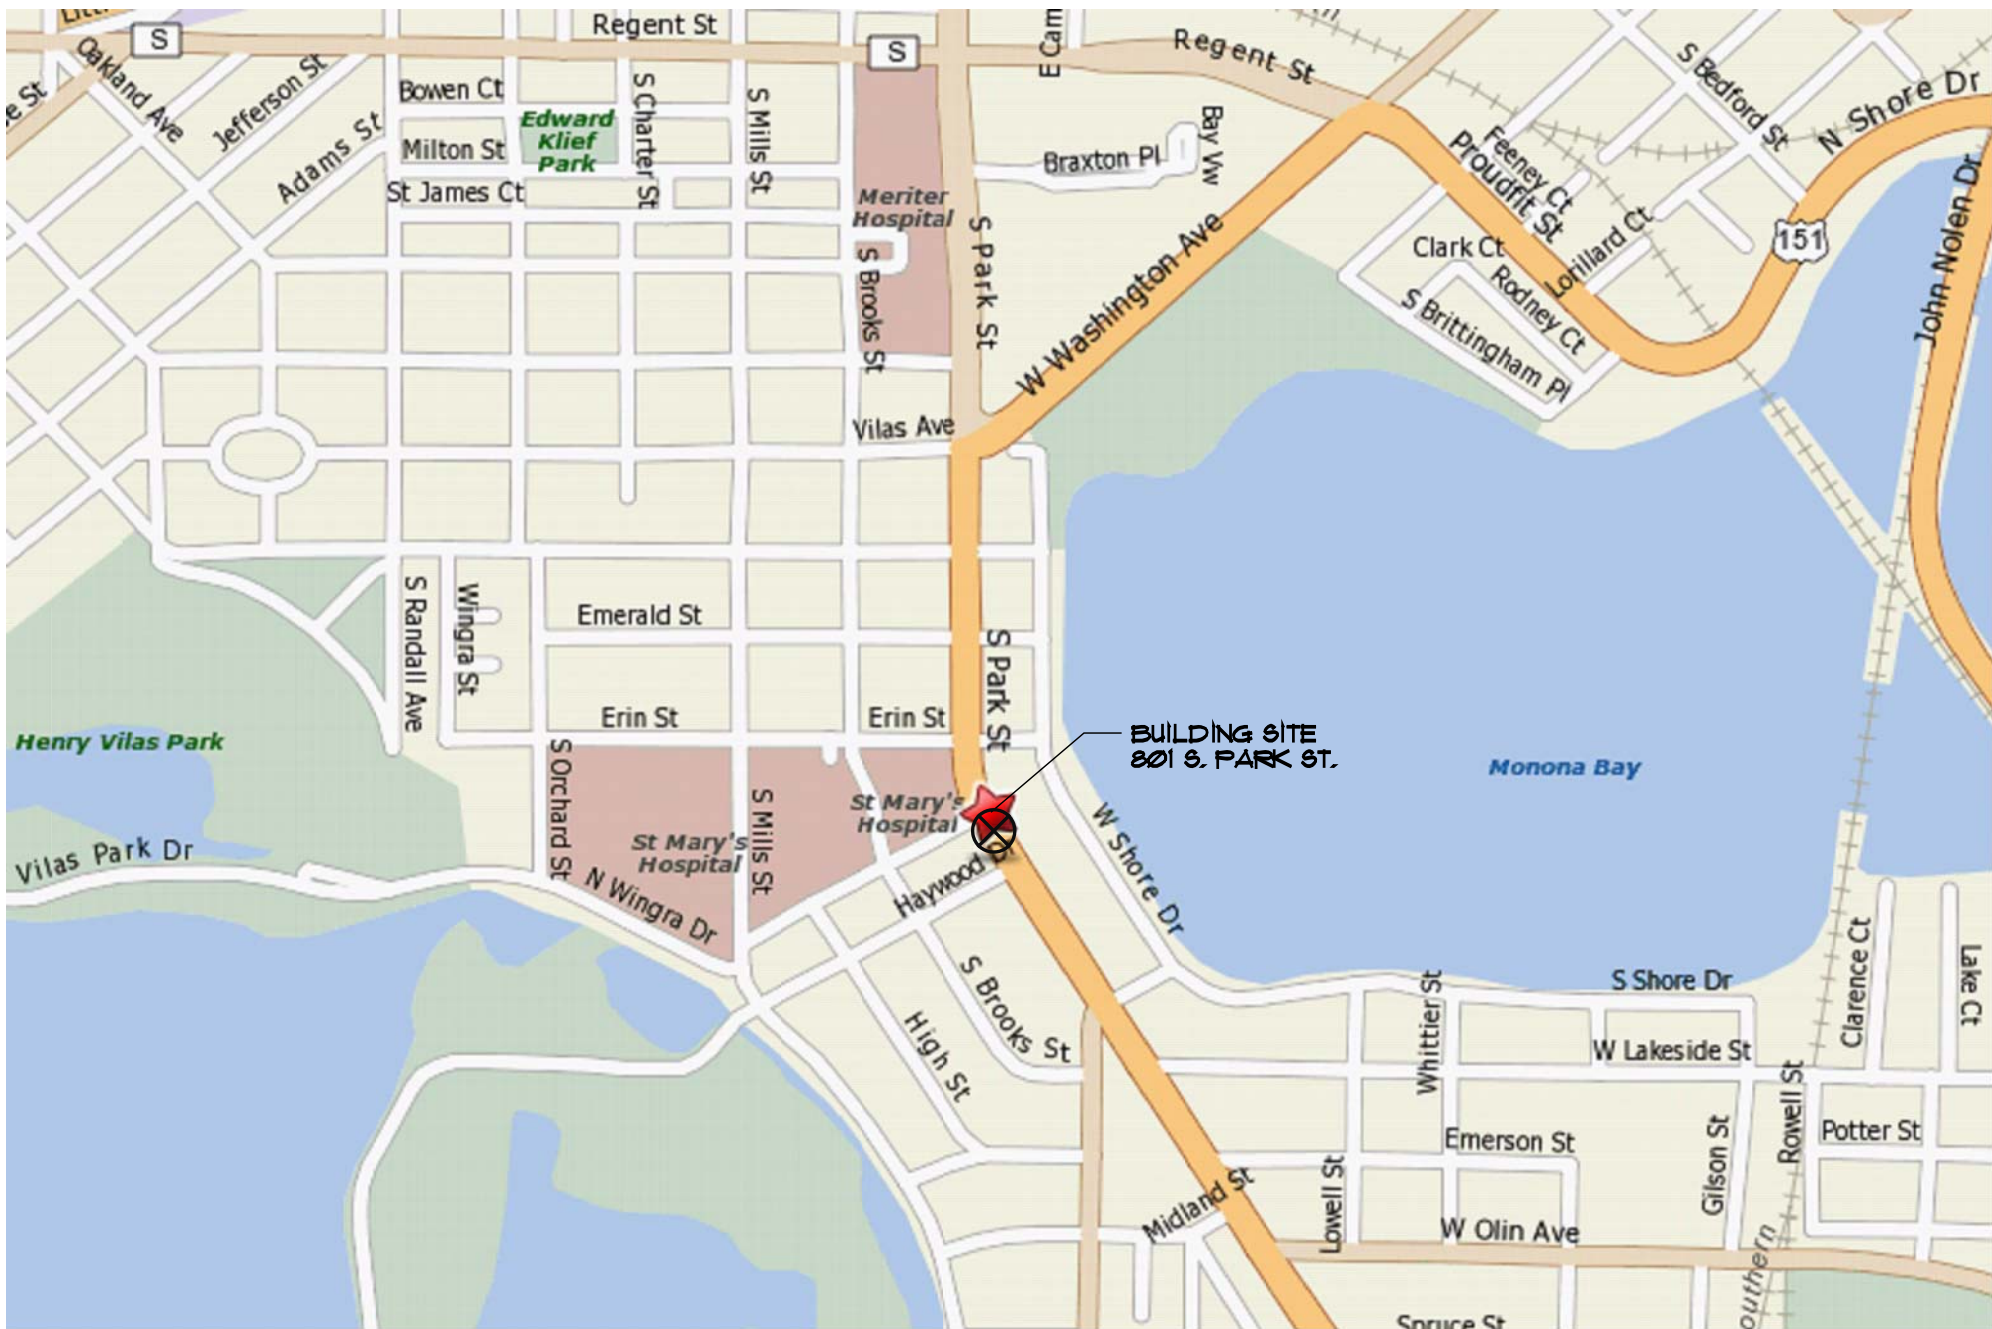

SITE LOCATION MAP

INDEX OF DRAWINGS:

- C-1.0 EXISTING SITE PLAN
- C-1.1 PROPOSED SITE PLAN
- C-1.2 GRADING AND EROSION CONTROL PLAN
- C-1.5 LANDSCAPE PLAN
- C-1.6 PHOTOMETRIC PLAN
- A-1.1 FIRST FLOOR PLAN
- A-1.2 SECOND FLOOR PLAN
- A-1.3 ROOF PLAN
- A-2.1 EXTERIOR ELEVATIONS
- A-4.1 WALL SECTION

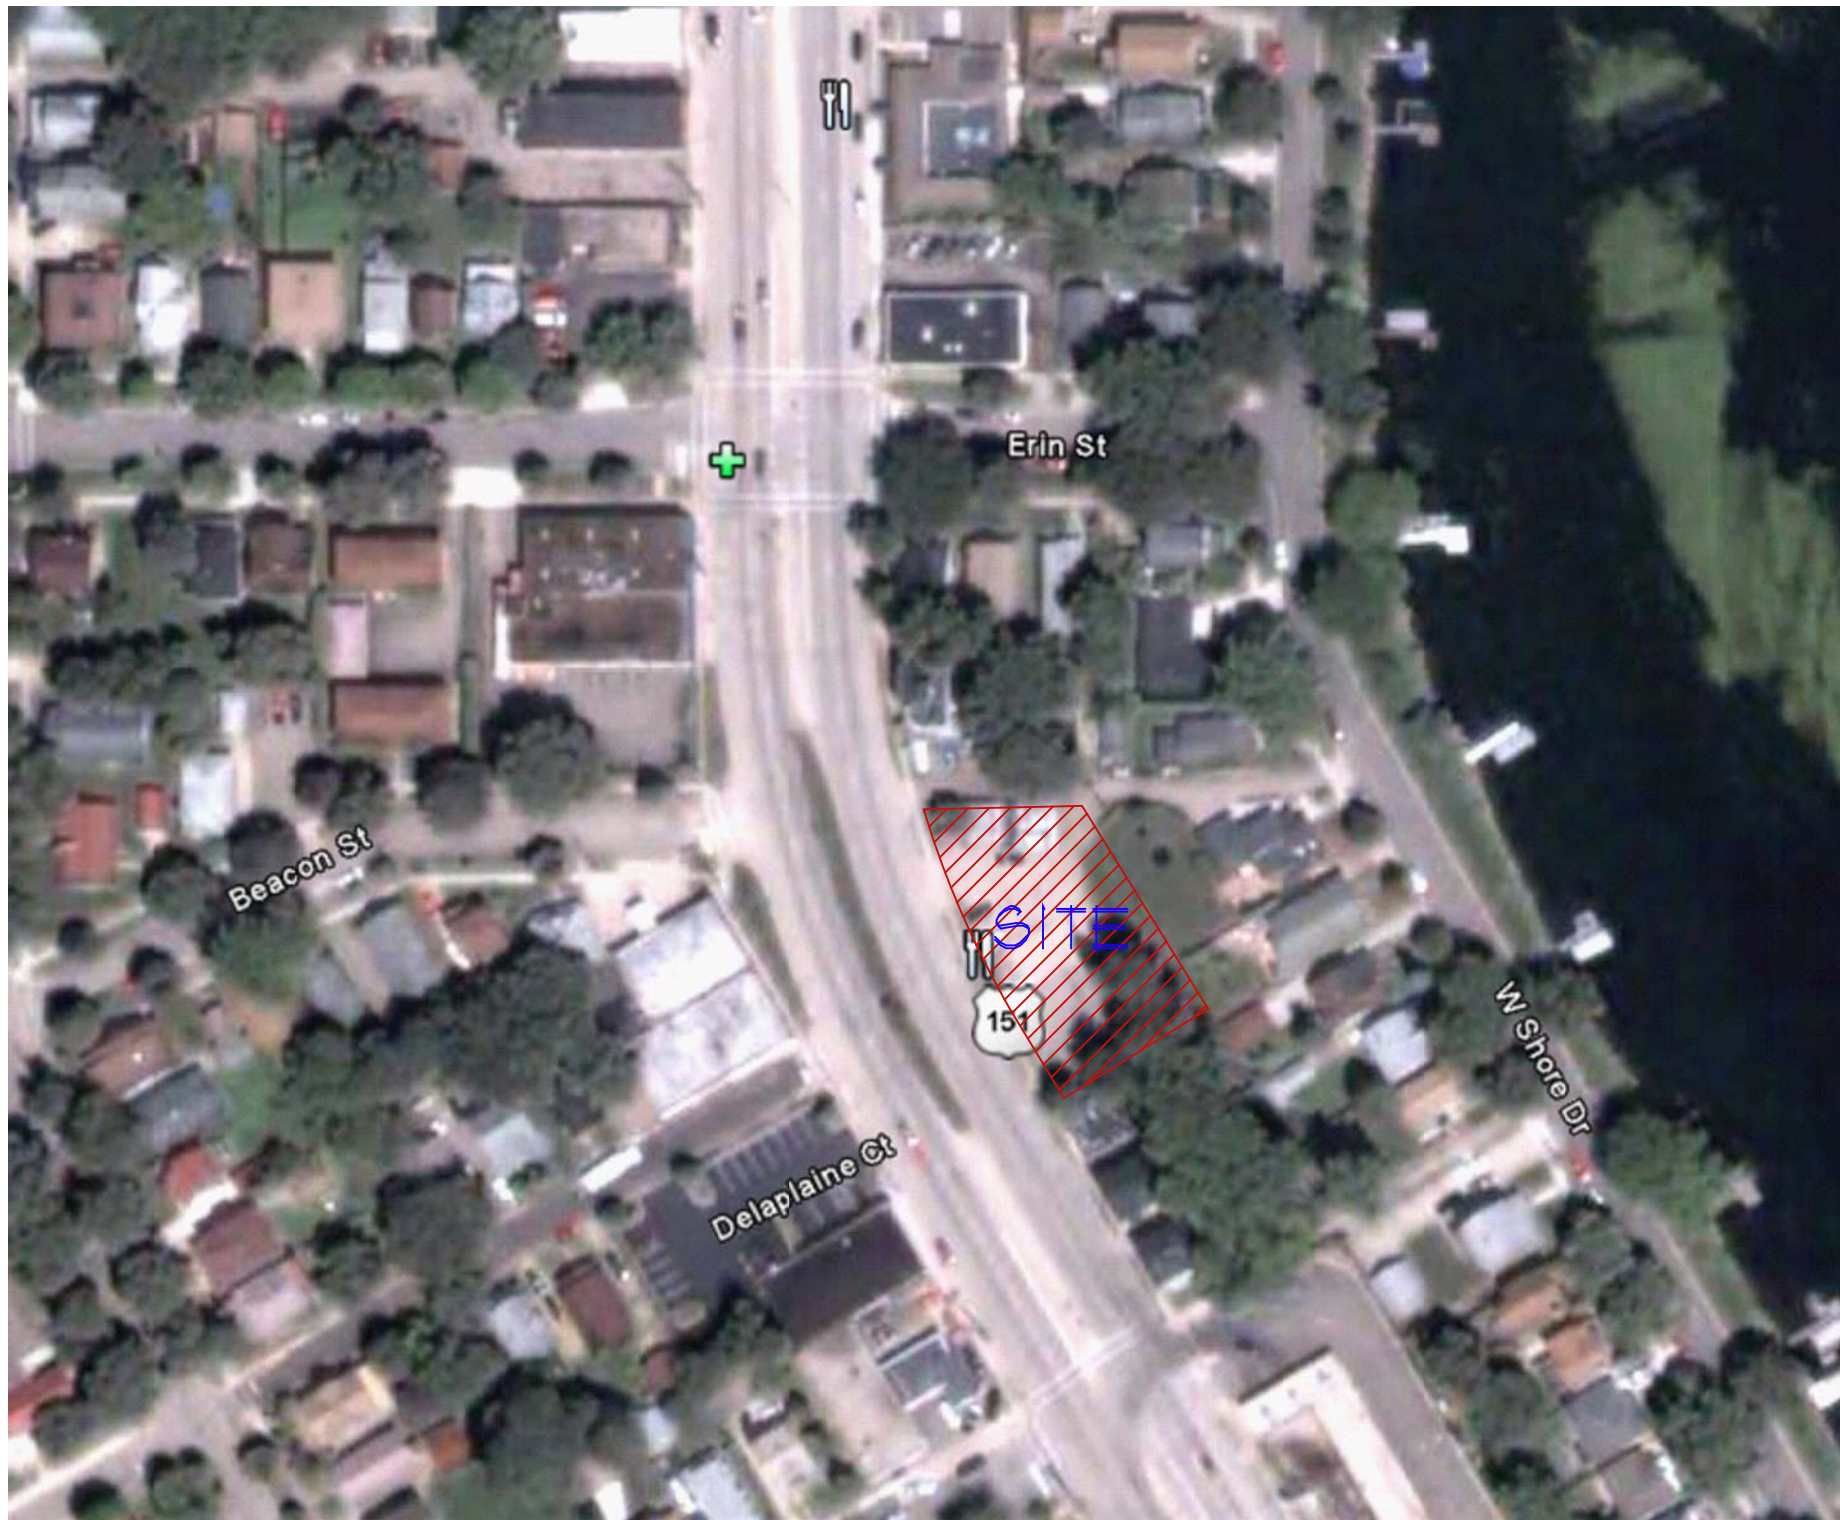



AERIAL VIEW




801 SOUTH PARK STREET


SEPTEMBER 12, 2011

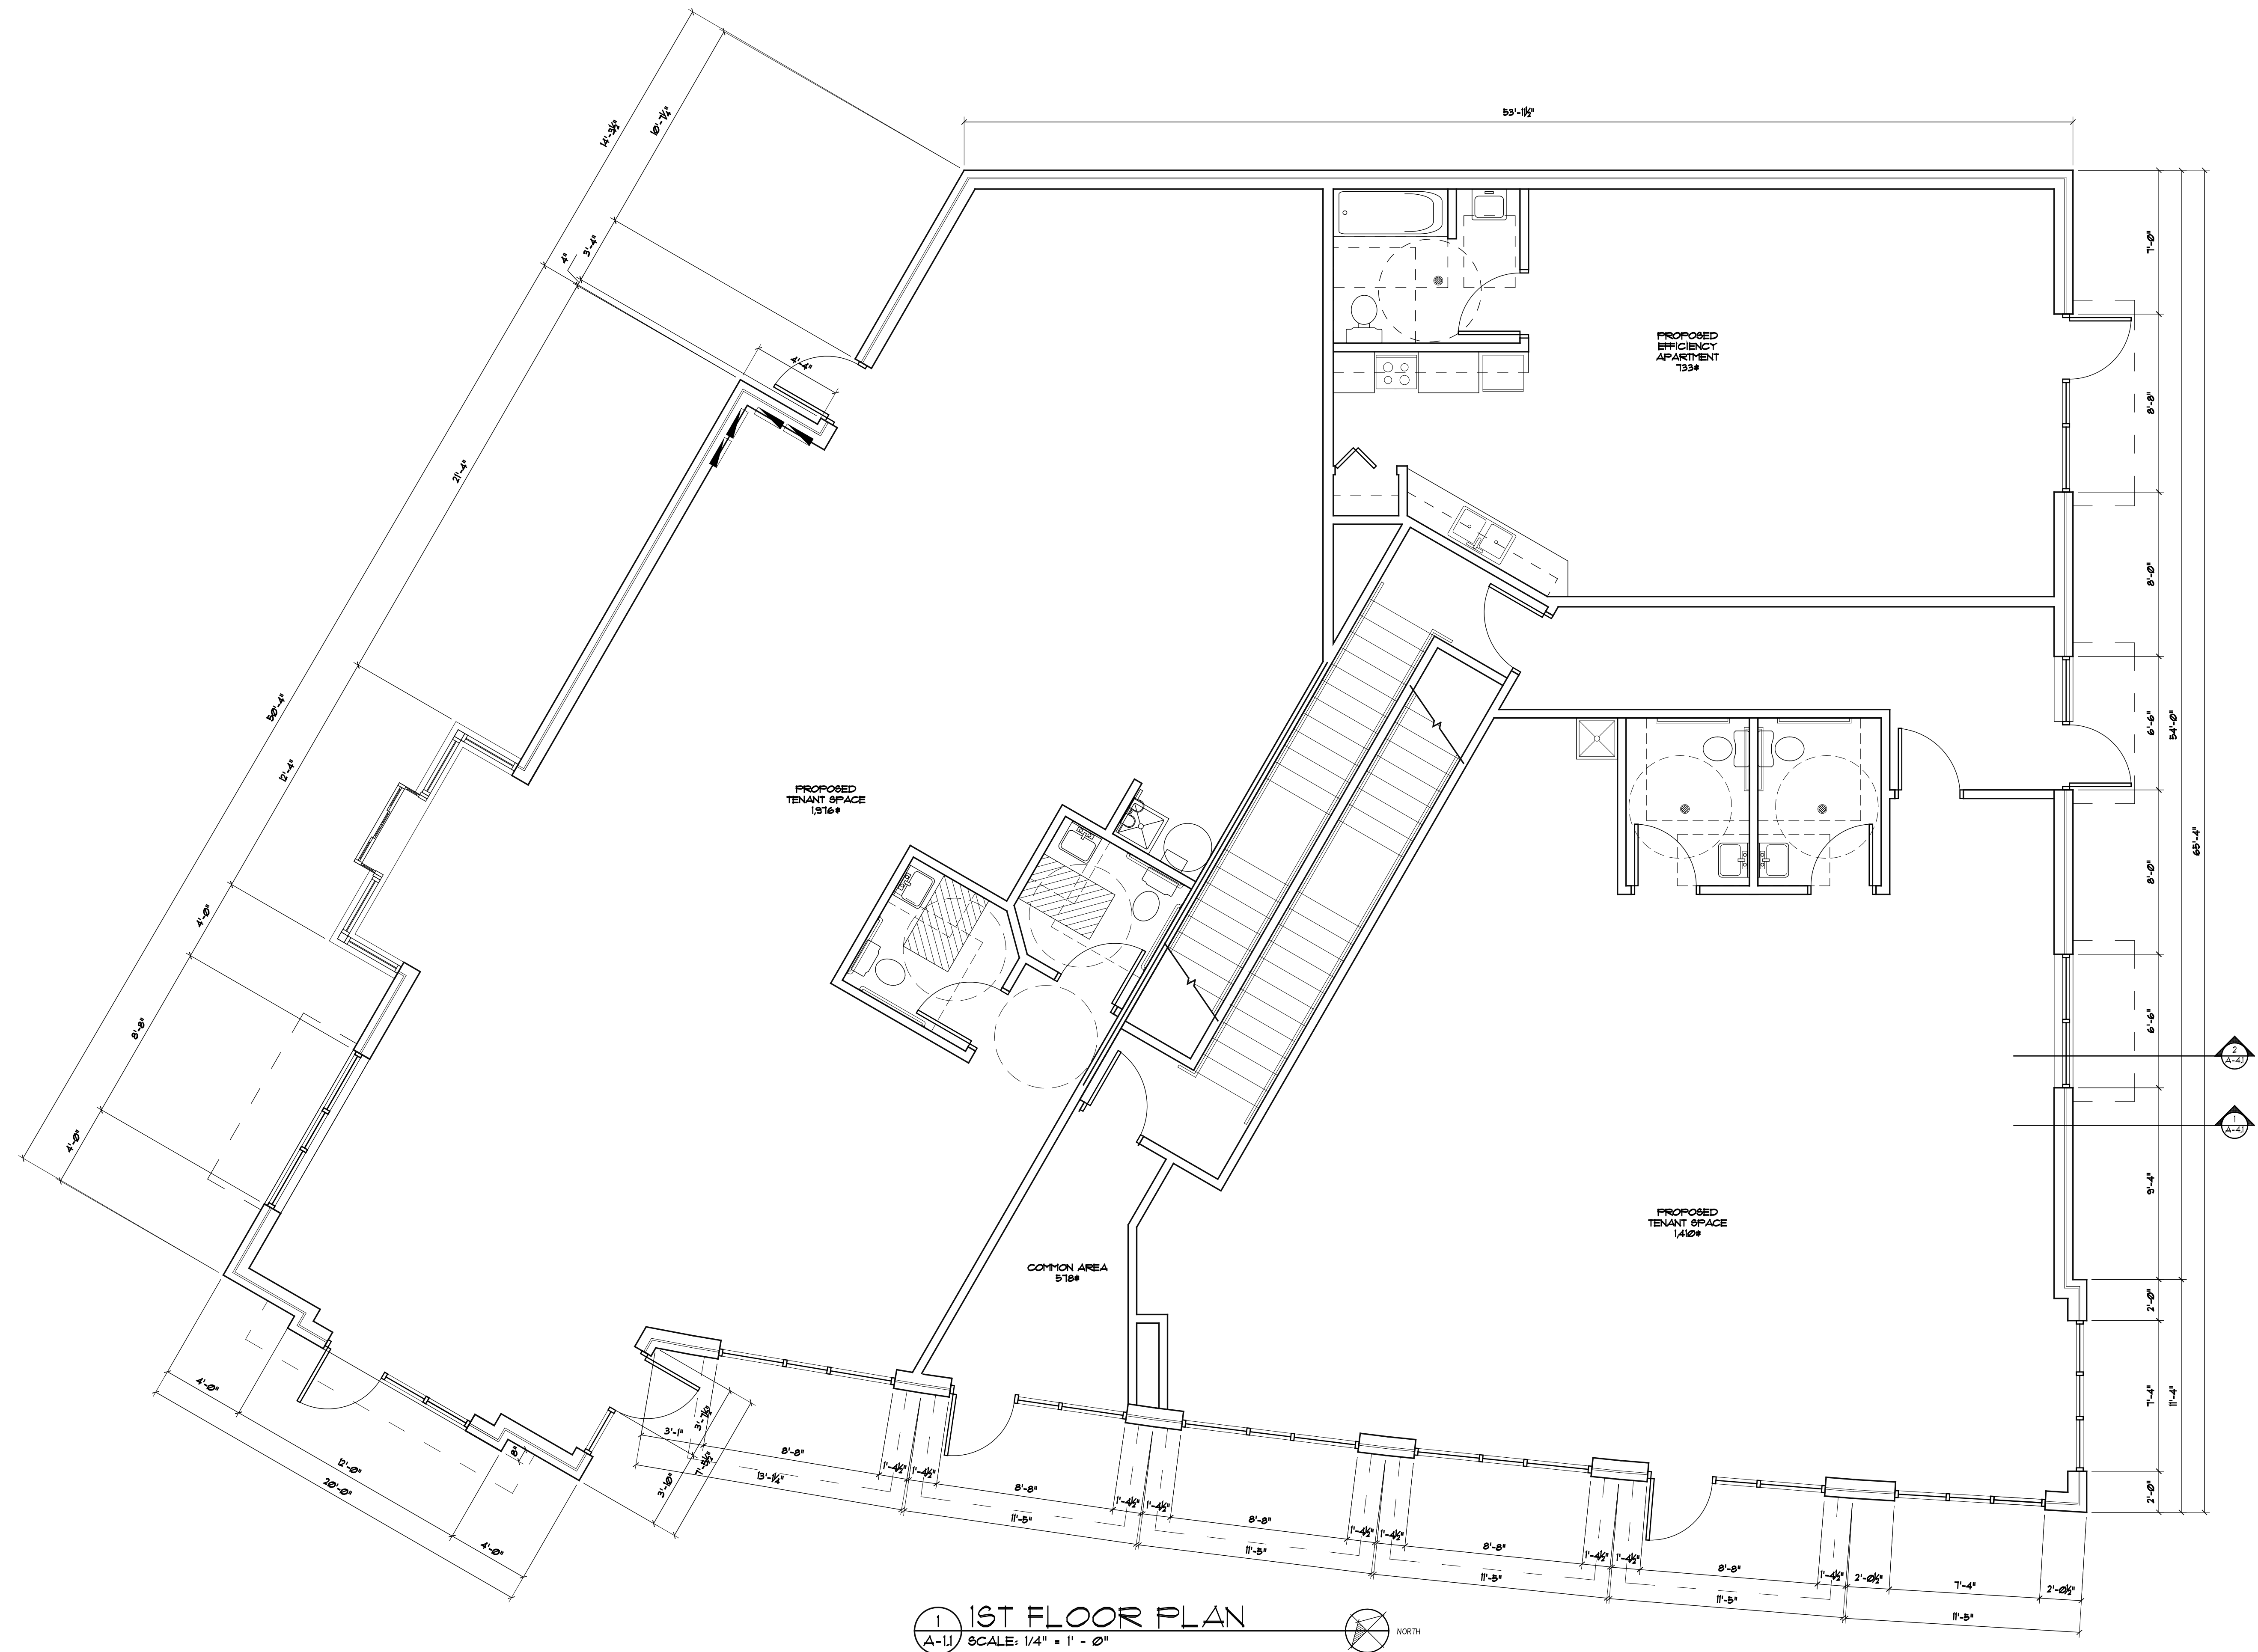

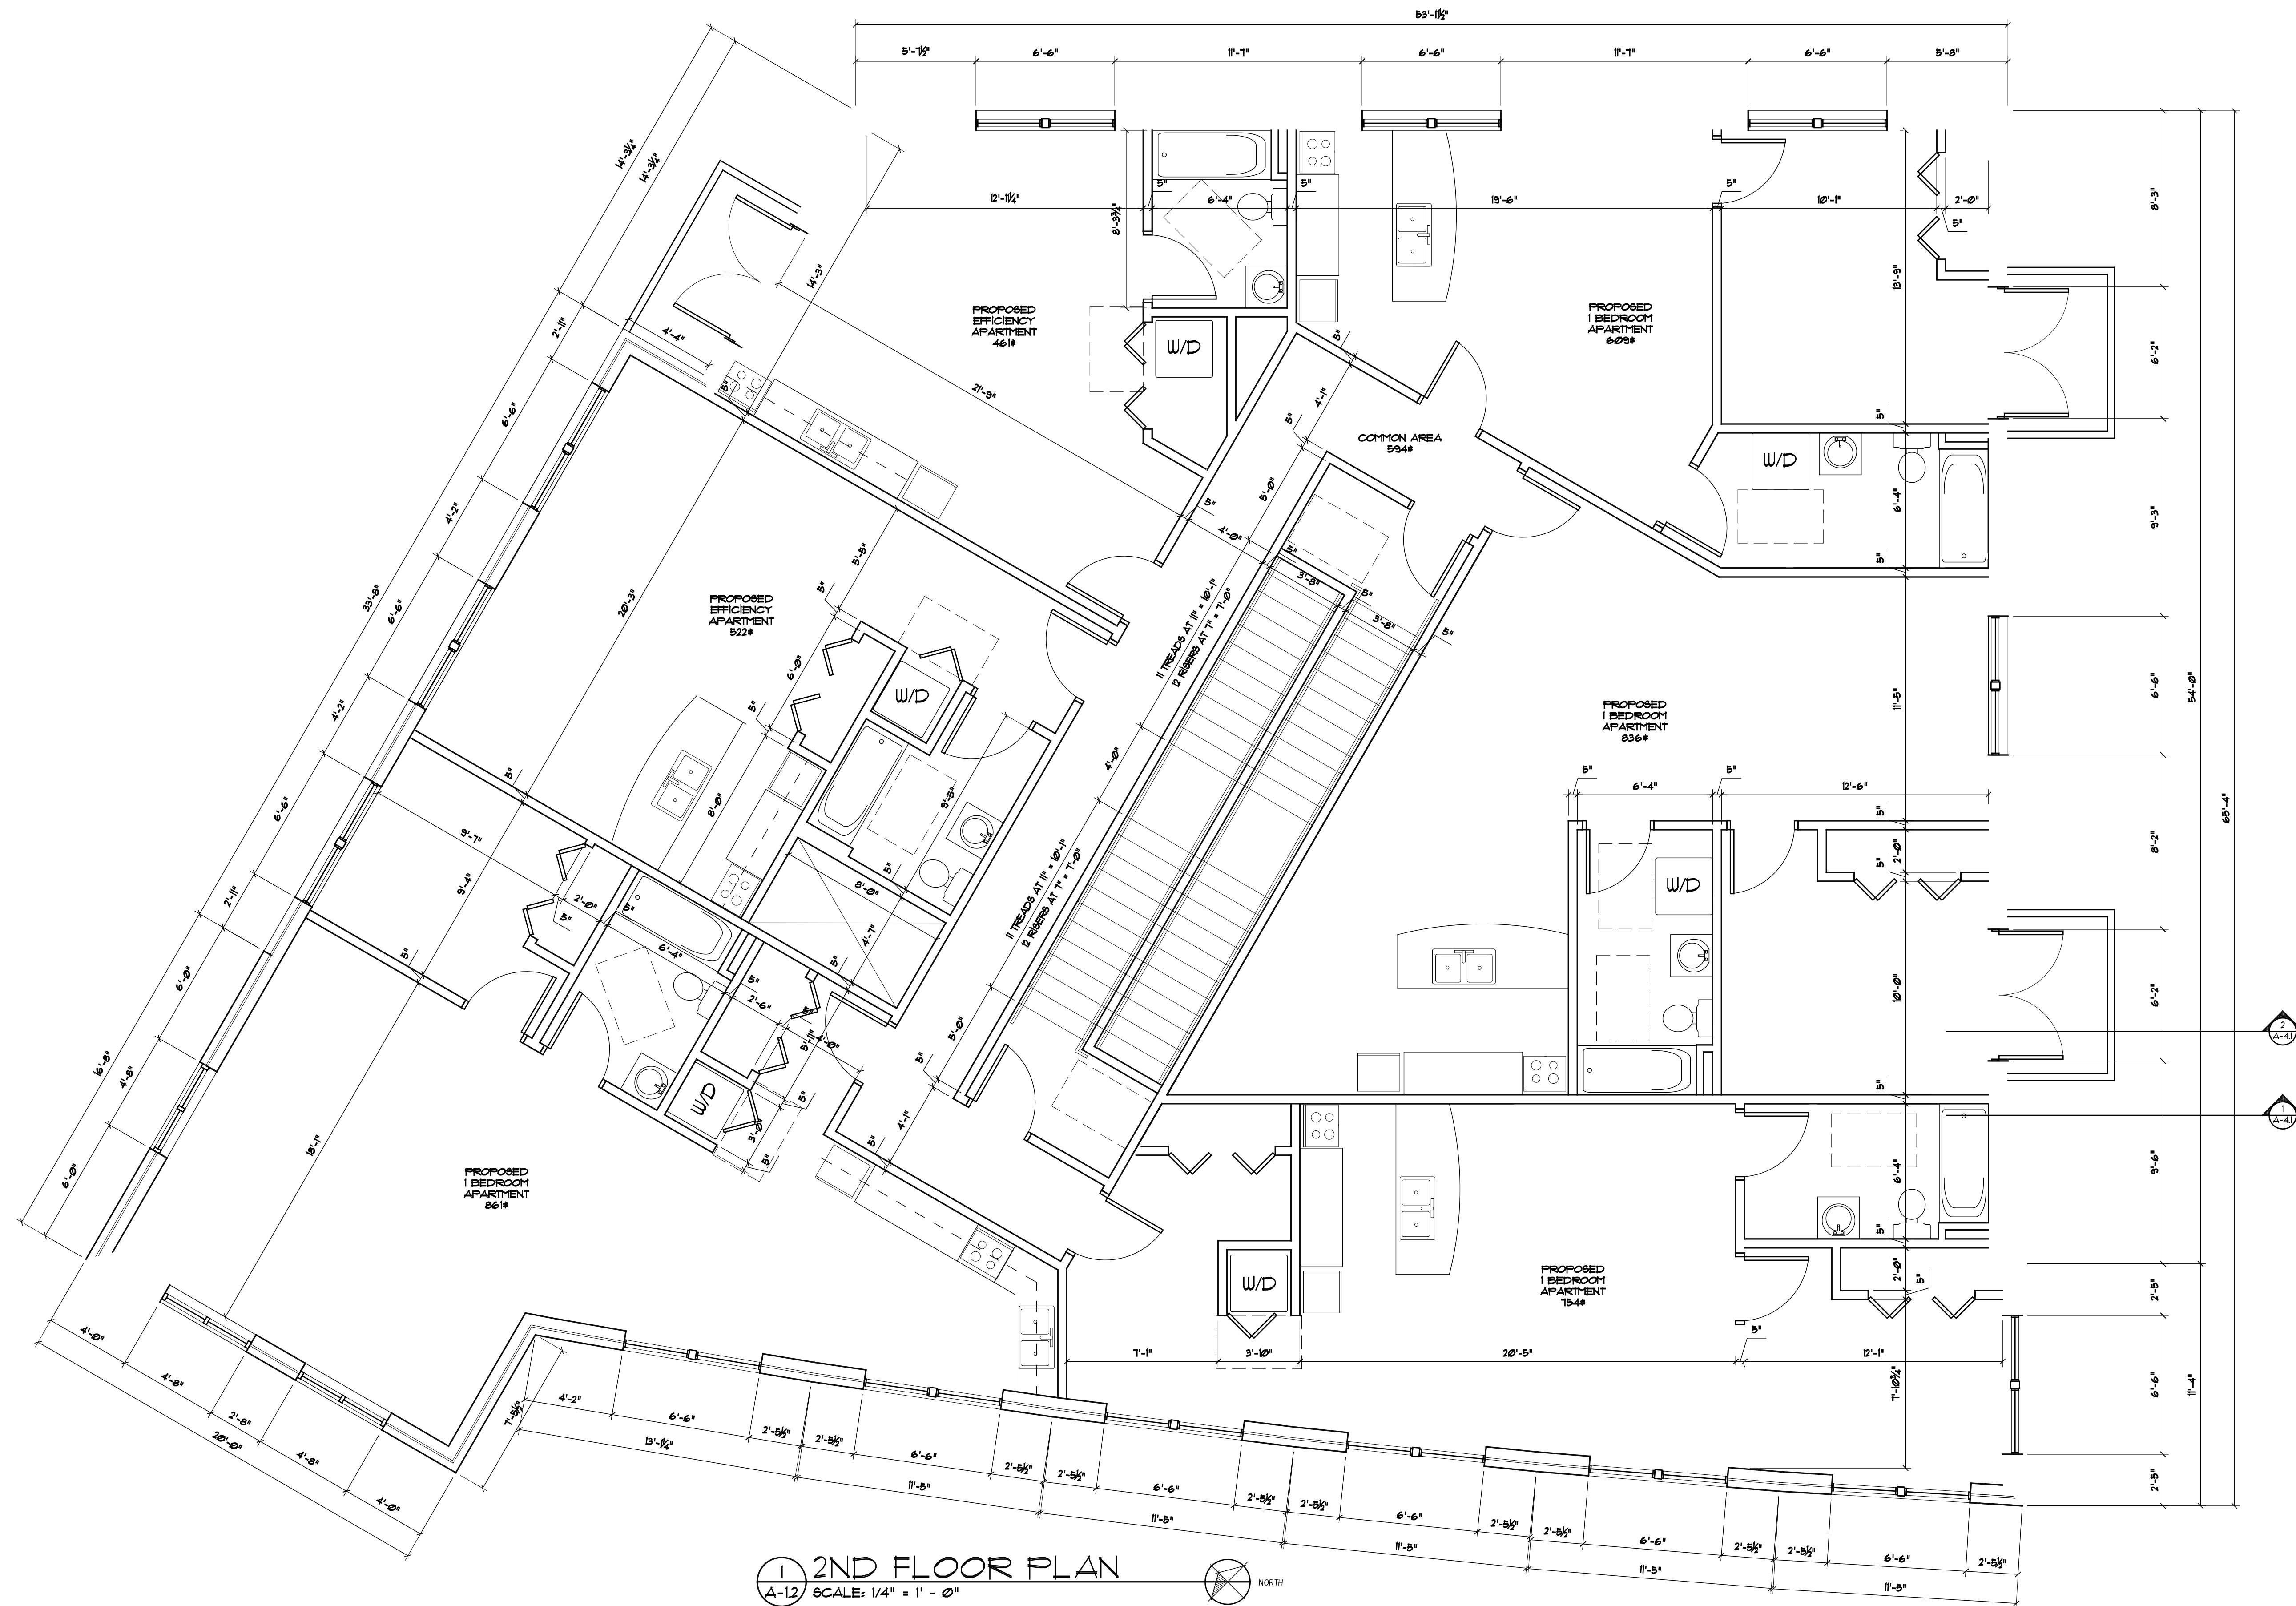

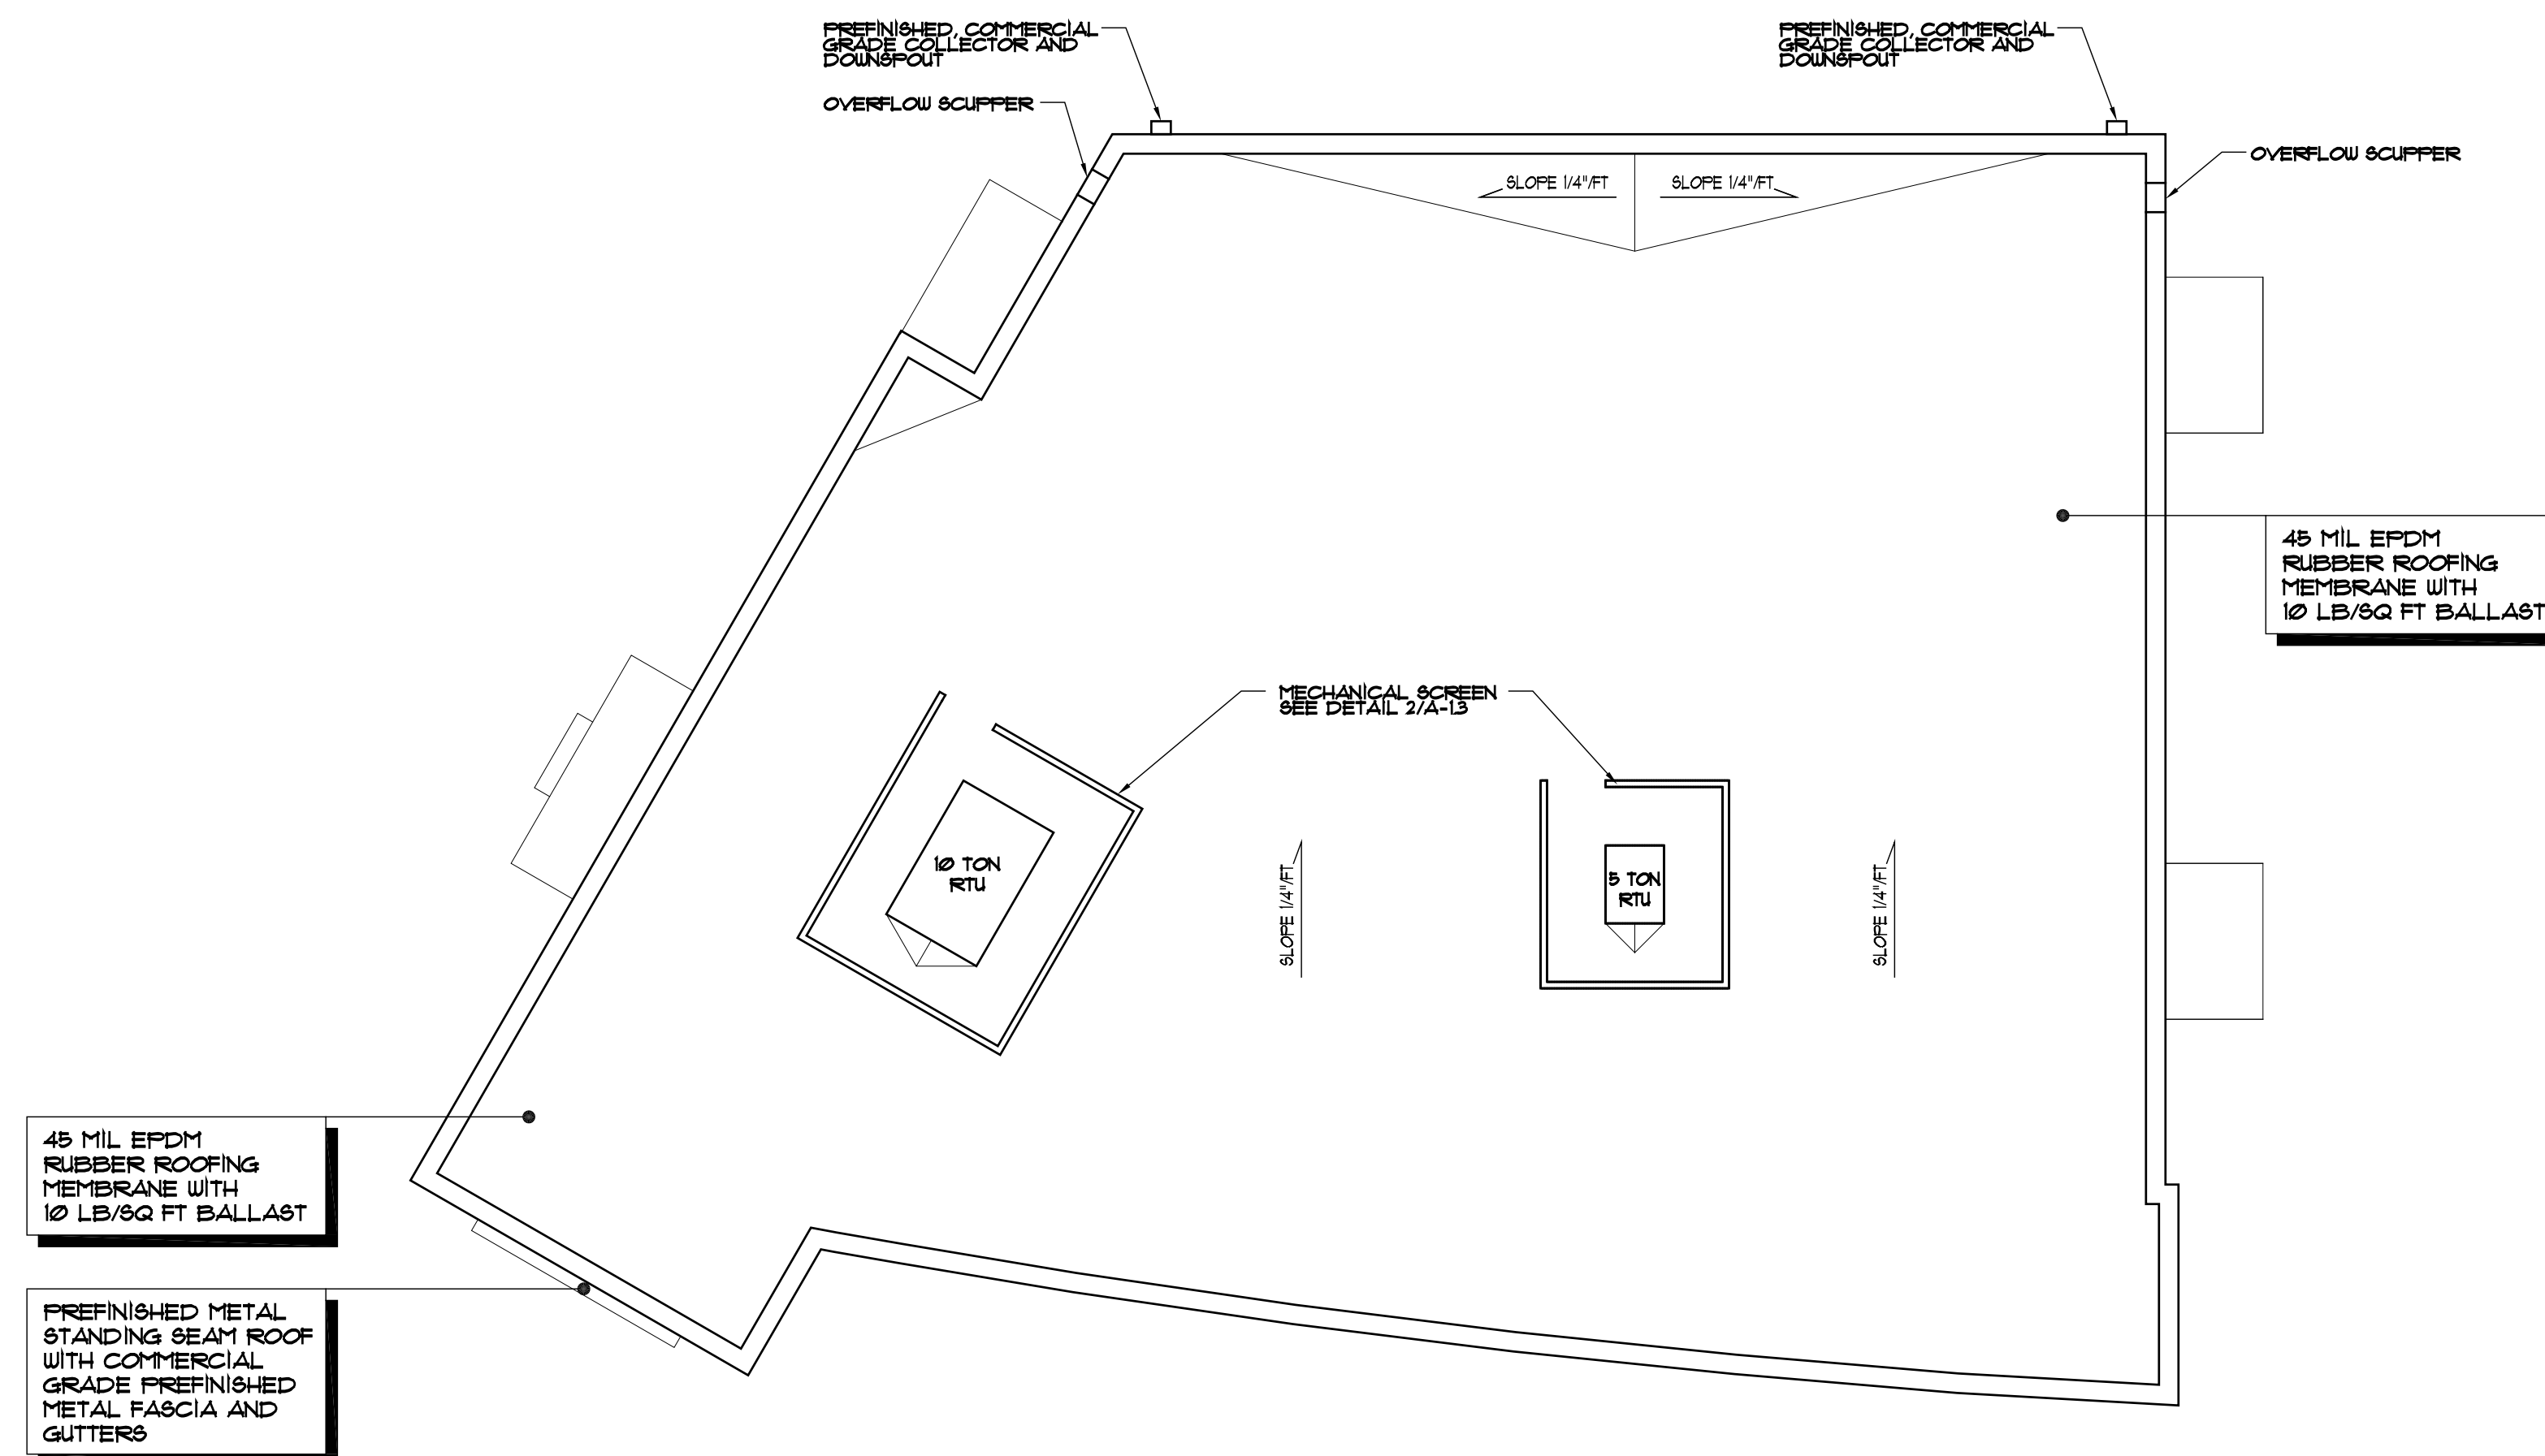

1 ROOF PLAN
A-13 SCALE: 1/8" = 1' - 0"

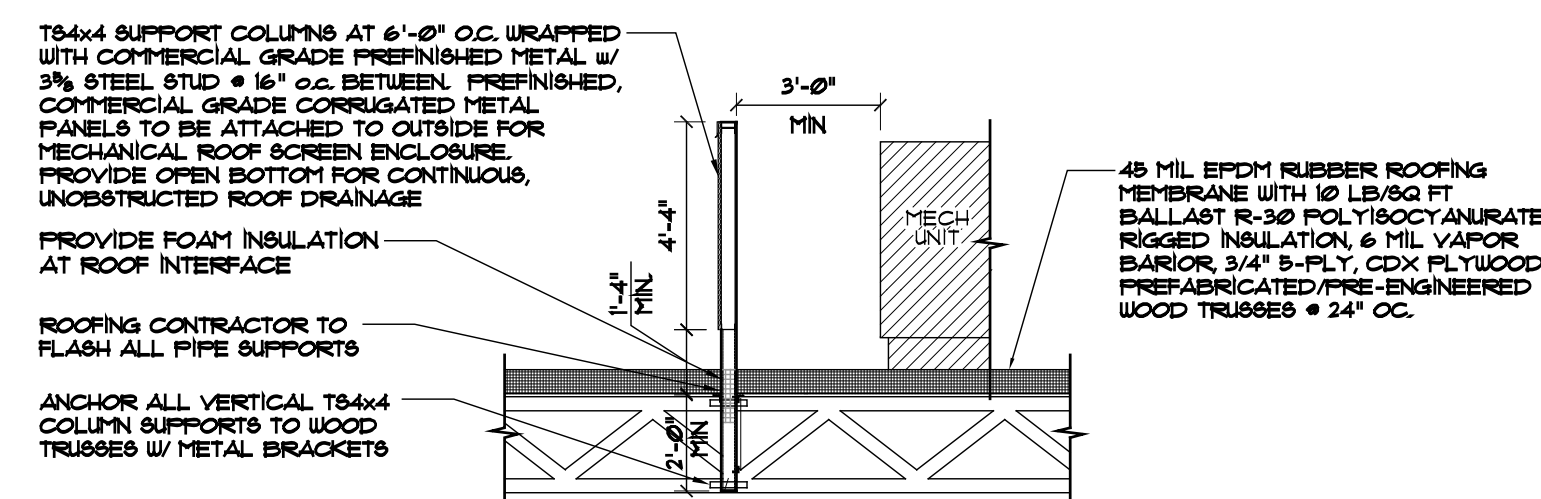

2 MECHANICAL SCREEN SECTION
A-13 SCALE: 1/4" = 1' - 0"

GENERAL NOTES


TYPICAL FLAT ROOF PREFABRICATED WOOD TRUSSES @ 24" O.C. 3/4" T&G 5-PLY OSB PLYWOOD, 6 MIL VAPOR BARRIER, R-30 POLYISOCYANURATE RIGID INSULATION (6" MIN) OR EXPANDED POLYSTYRENE INSULATION (EPS) (8" MIN), 45 MIL EPDM RUBBER ROOFING MEMBRANE WITH 10 LB/SQ FT ROOFING BALLAST

TYPICAL STANDING SEAM METAL ROOF PREFABRICATED WOOD TRUSSES @ 24" O.C. 5/8" 5 PLY OSB, PREFINISHED STANDING SEAM METAL ROOF WITH PREFINISHED METAL FASCIA


MATERIAL LIST	
STANDING SEAM ROOF:	COATED METALS GROUP, "DARK BRONZE"
PREFINISHED METAL FASCIA AND SOFFIT:	COATED METALS GROUP, "DARK BRONZE"
LP SMARTSIDE SIDING:	PAINT TO MATCH SHERWIN WILLIAMS, 90W-0038, "LIBRARY FEATHER"
ALUMINUM CLAD WOOD WINDOWS:	PELLA, "DARK BRONZE", ALUMINUM CLADDING WITH LOW-E GLASS
ALUMINUM STOREFRONT & WINDOW SYSTEMS:	KALNEER, "DARK BRONZE", ALUMINUM WITH INSULATED LOW-E GLASS, THERMAL BREAKS IN FRAME
FIELD BRICK:	ENDICOTT CLAY PRODUCTS CO. MEDIUM IRON SPOT FTI UTILITY SIZE VENEUR FINISH WITH COLORED MORTAR IN ACCENT COLOR
RENAISSANCE STONE BASE AND ACCENT BANDS:	ARRISCRRAFT INTERNATIONAL, INC. RENAISSANCE STONE, "WHEAT", SMOOTH, DGG4 WITH COLORED MORTAR TO MATCH
CEDAR RAILING:	STAIN TO MATCH SHERWIN WILLIAMS 90W-6338, "FIRED BRICK"
PRECAST HEADS AND SILLS:	EDWARDS CAST STONE, #6, "WHEAT"



1 PARK STREET ELEVATION
A-2.1 SCALE: 1/8" = 1' - 0"

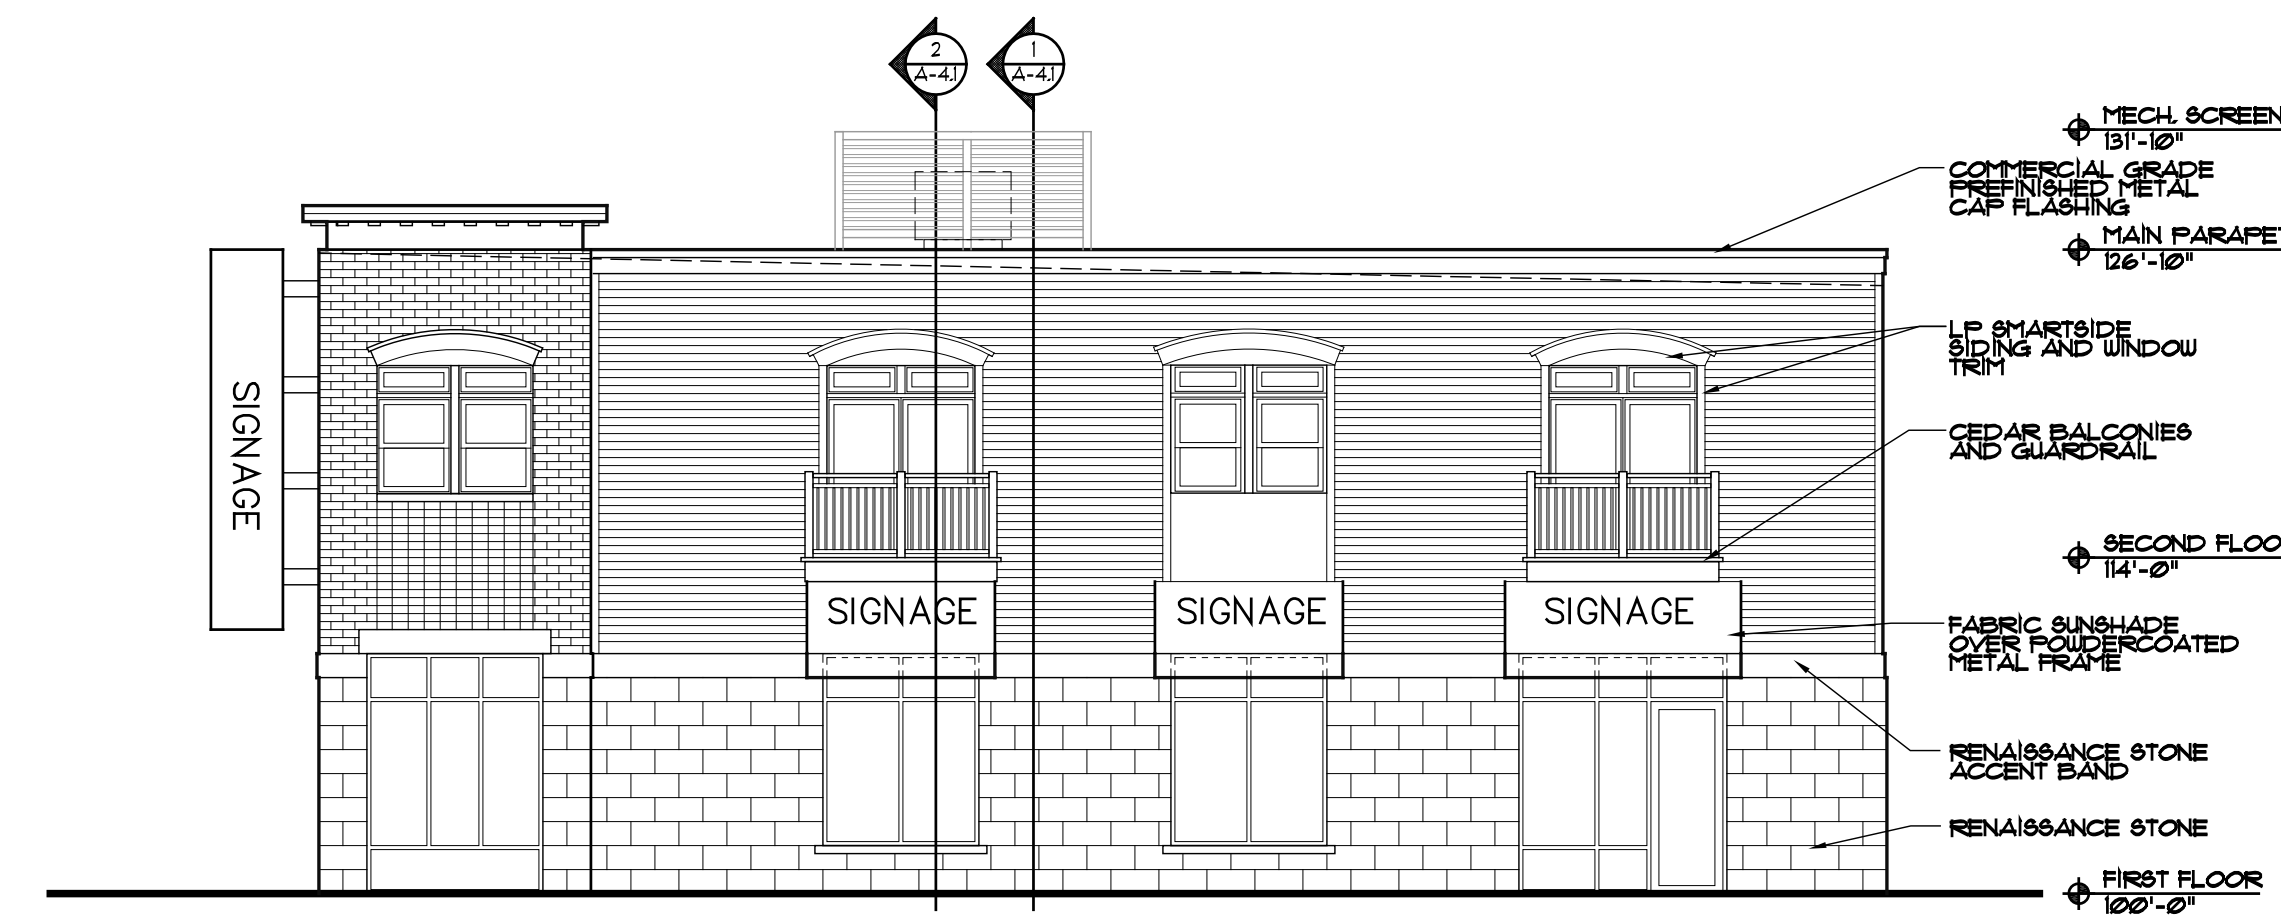







2 PARKING LOT ELEVATION
A-2.1 SCALE: 1/8" = 1' - 0"

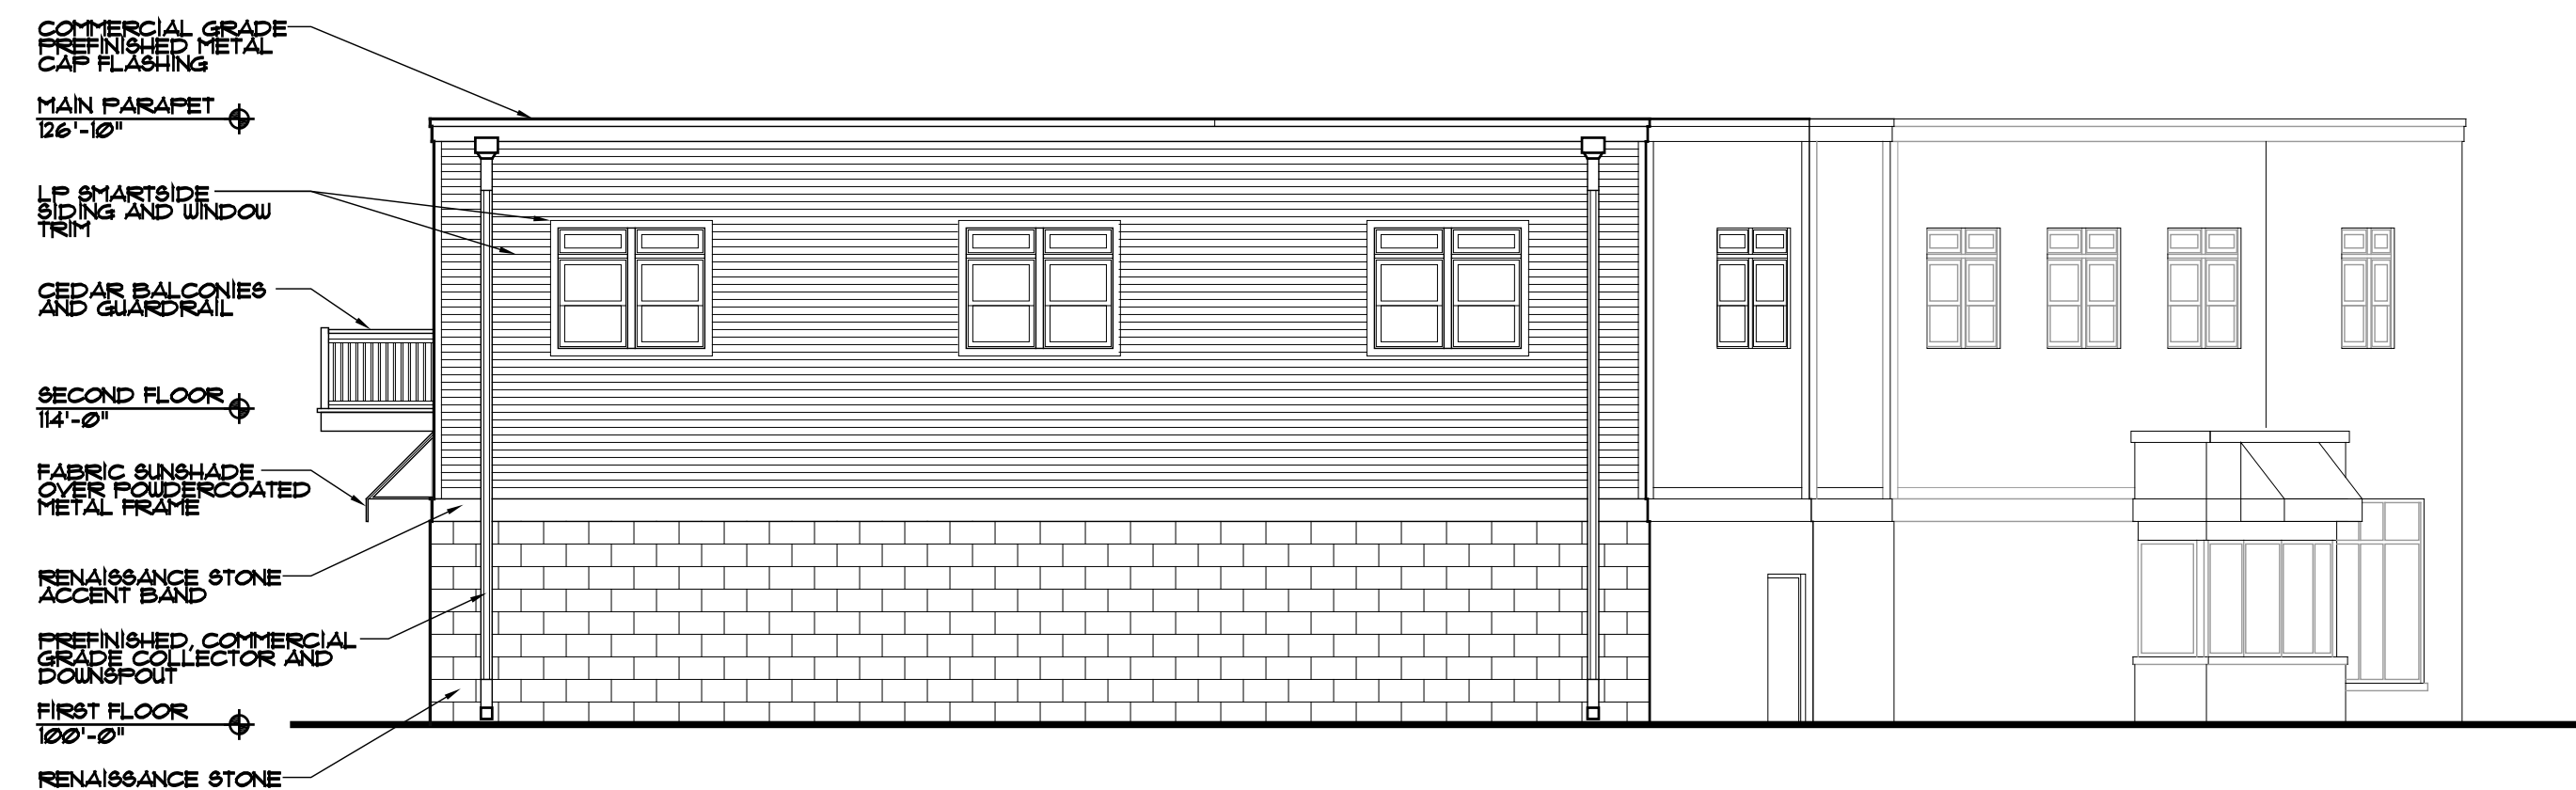

3 BACK ELEVATION
A-2.1 SCALE: 1/8" = 1' - 0"





4 DRIVE-THRU ELEVATION
A-2.1 SCALE: 1/8" = 1' - 0"

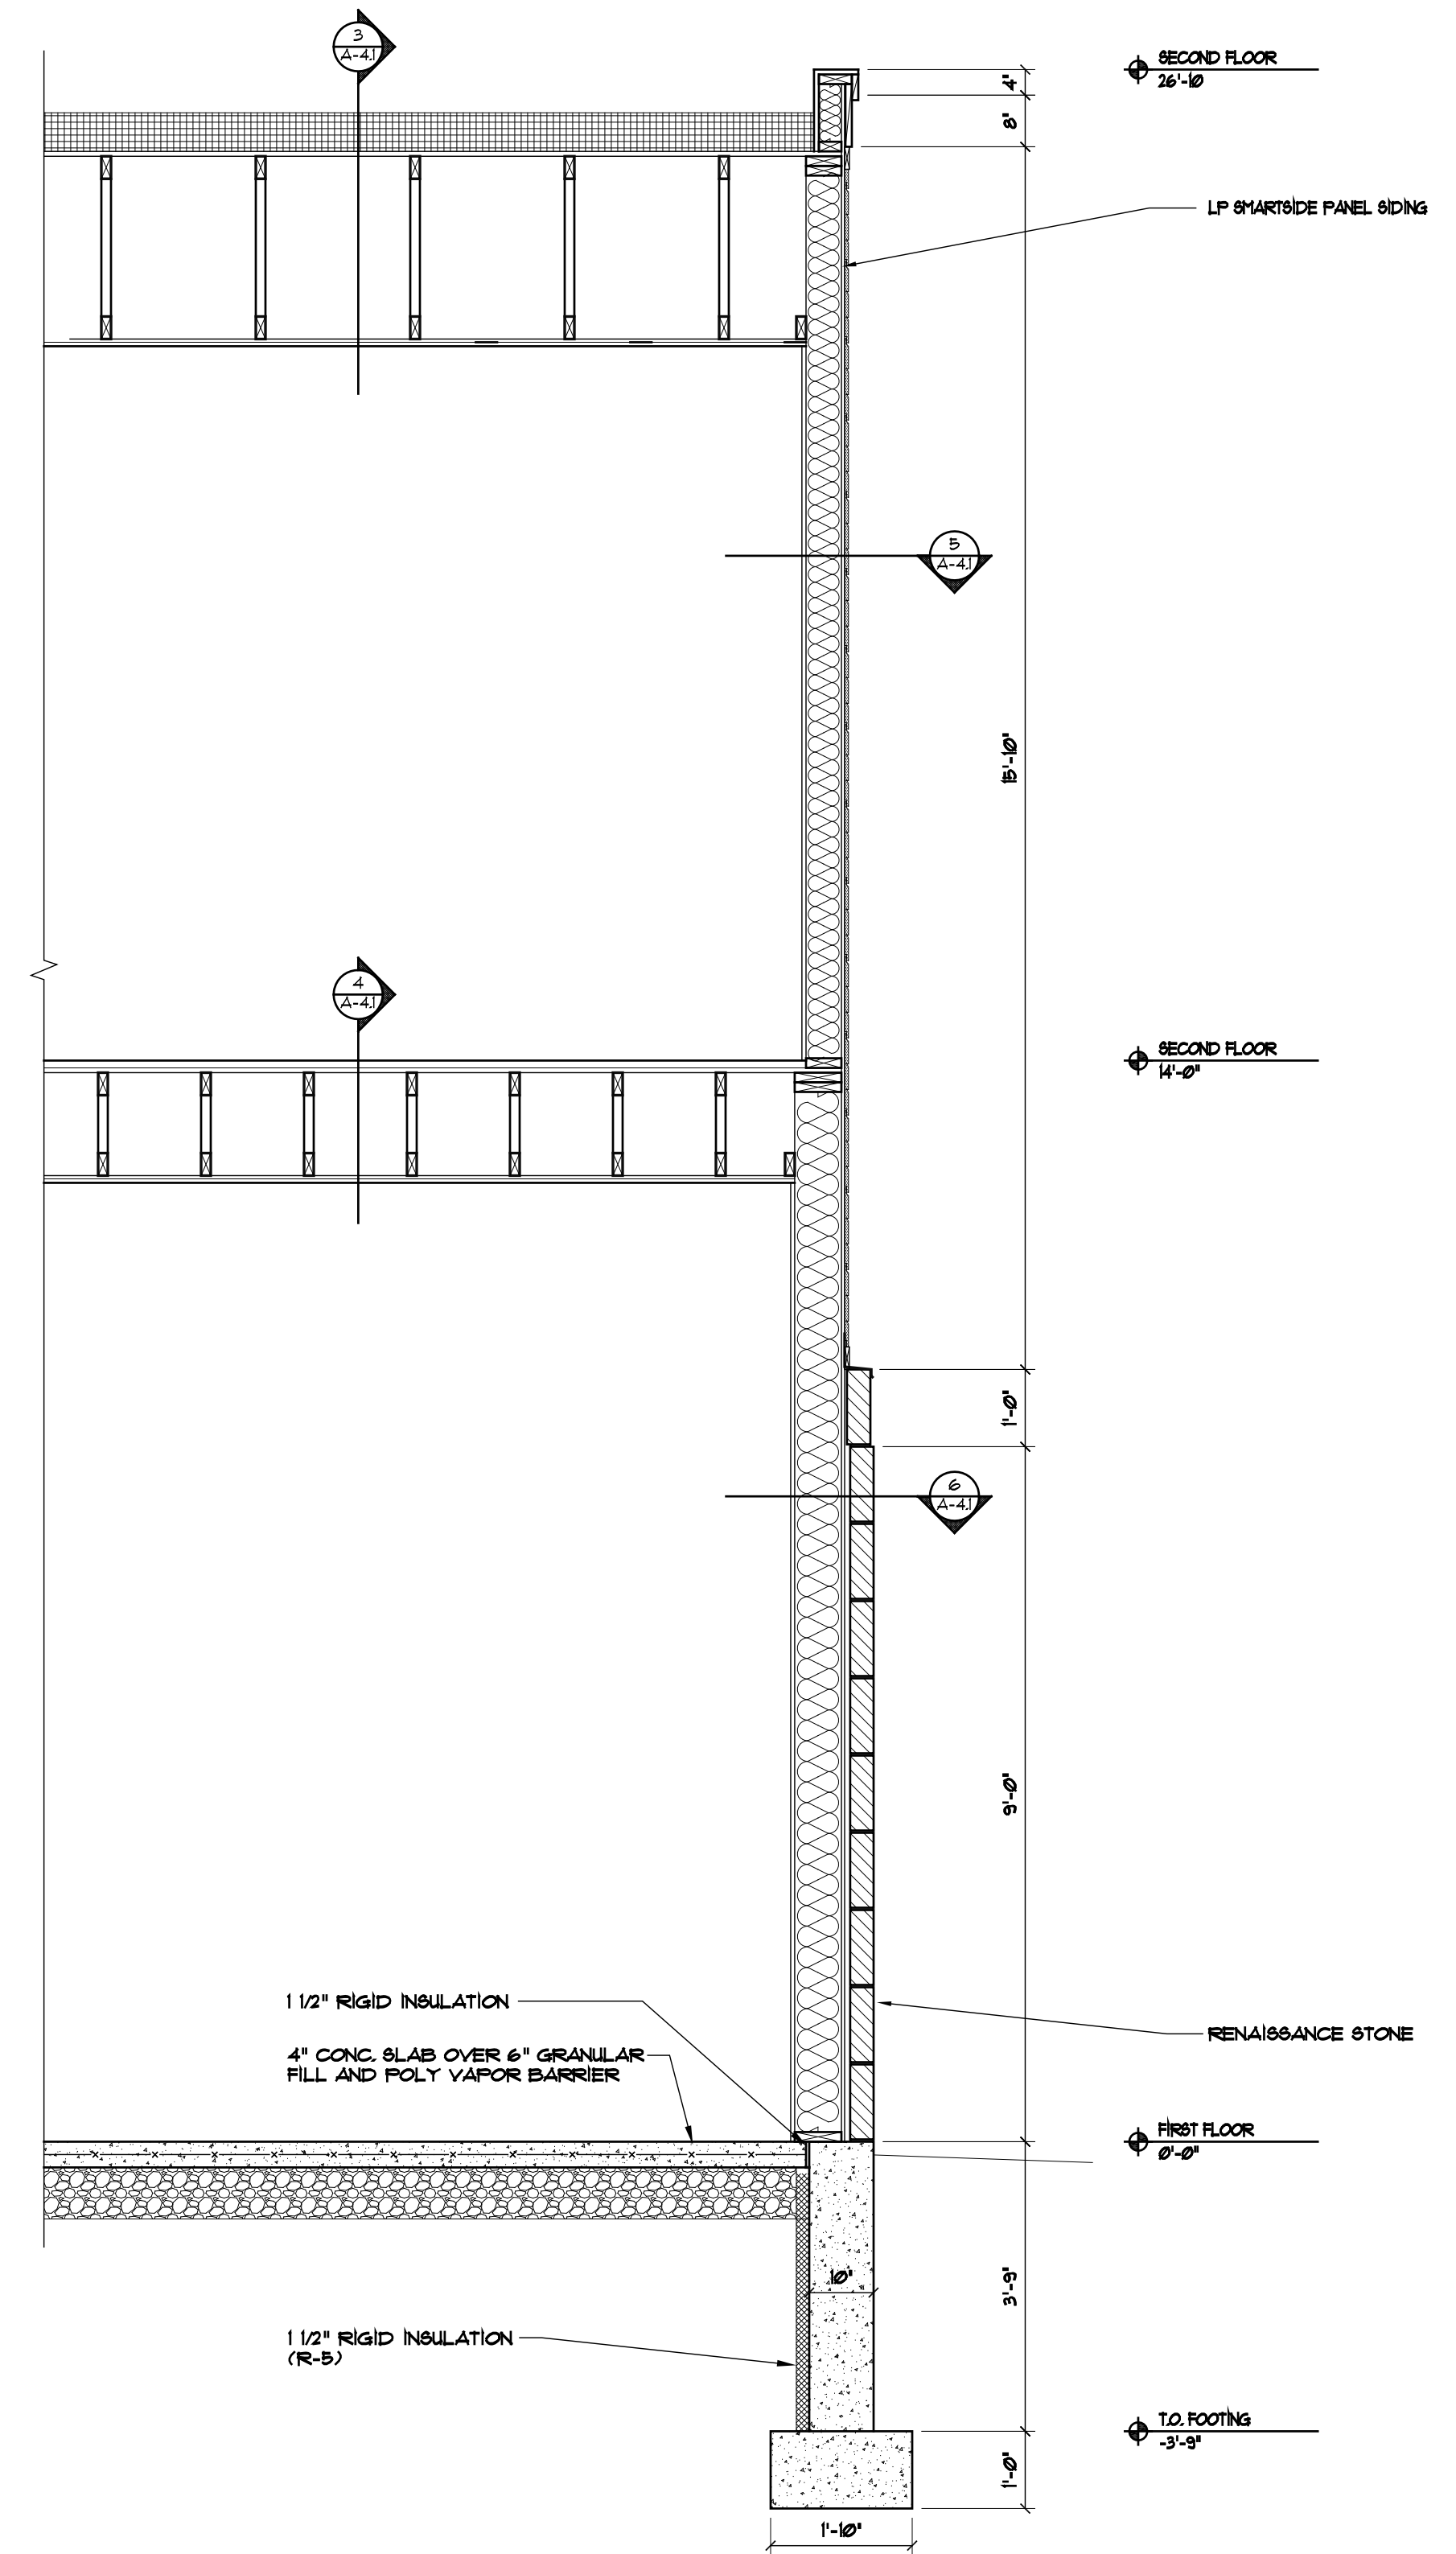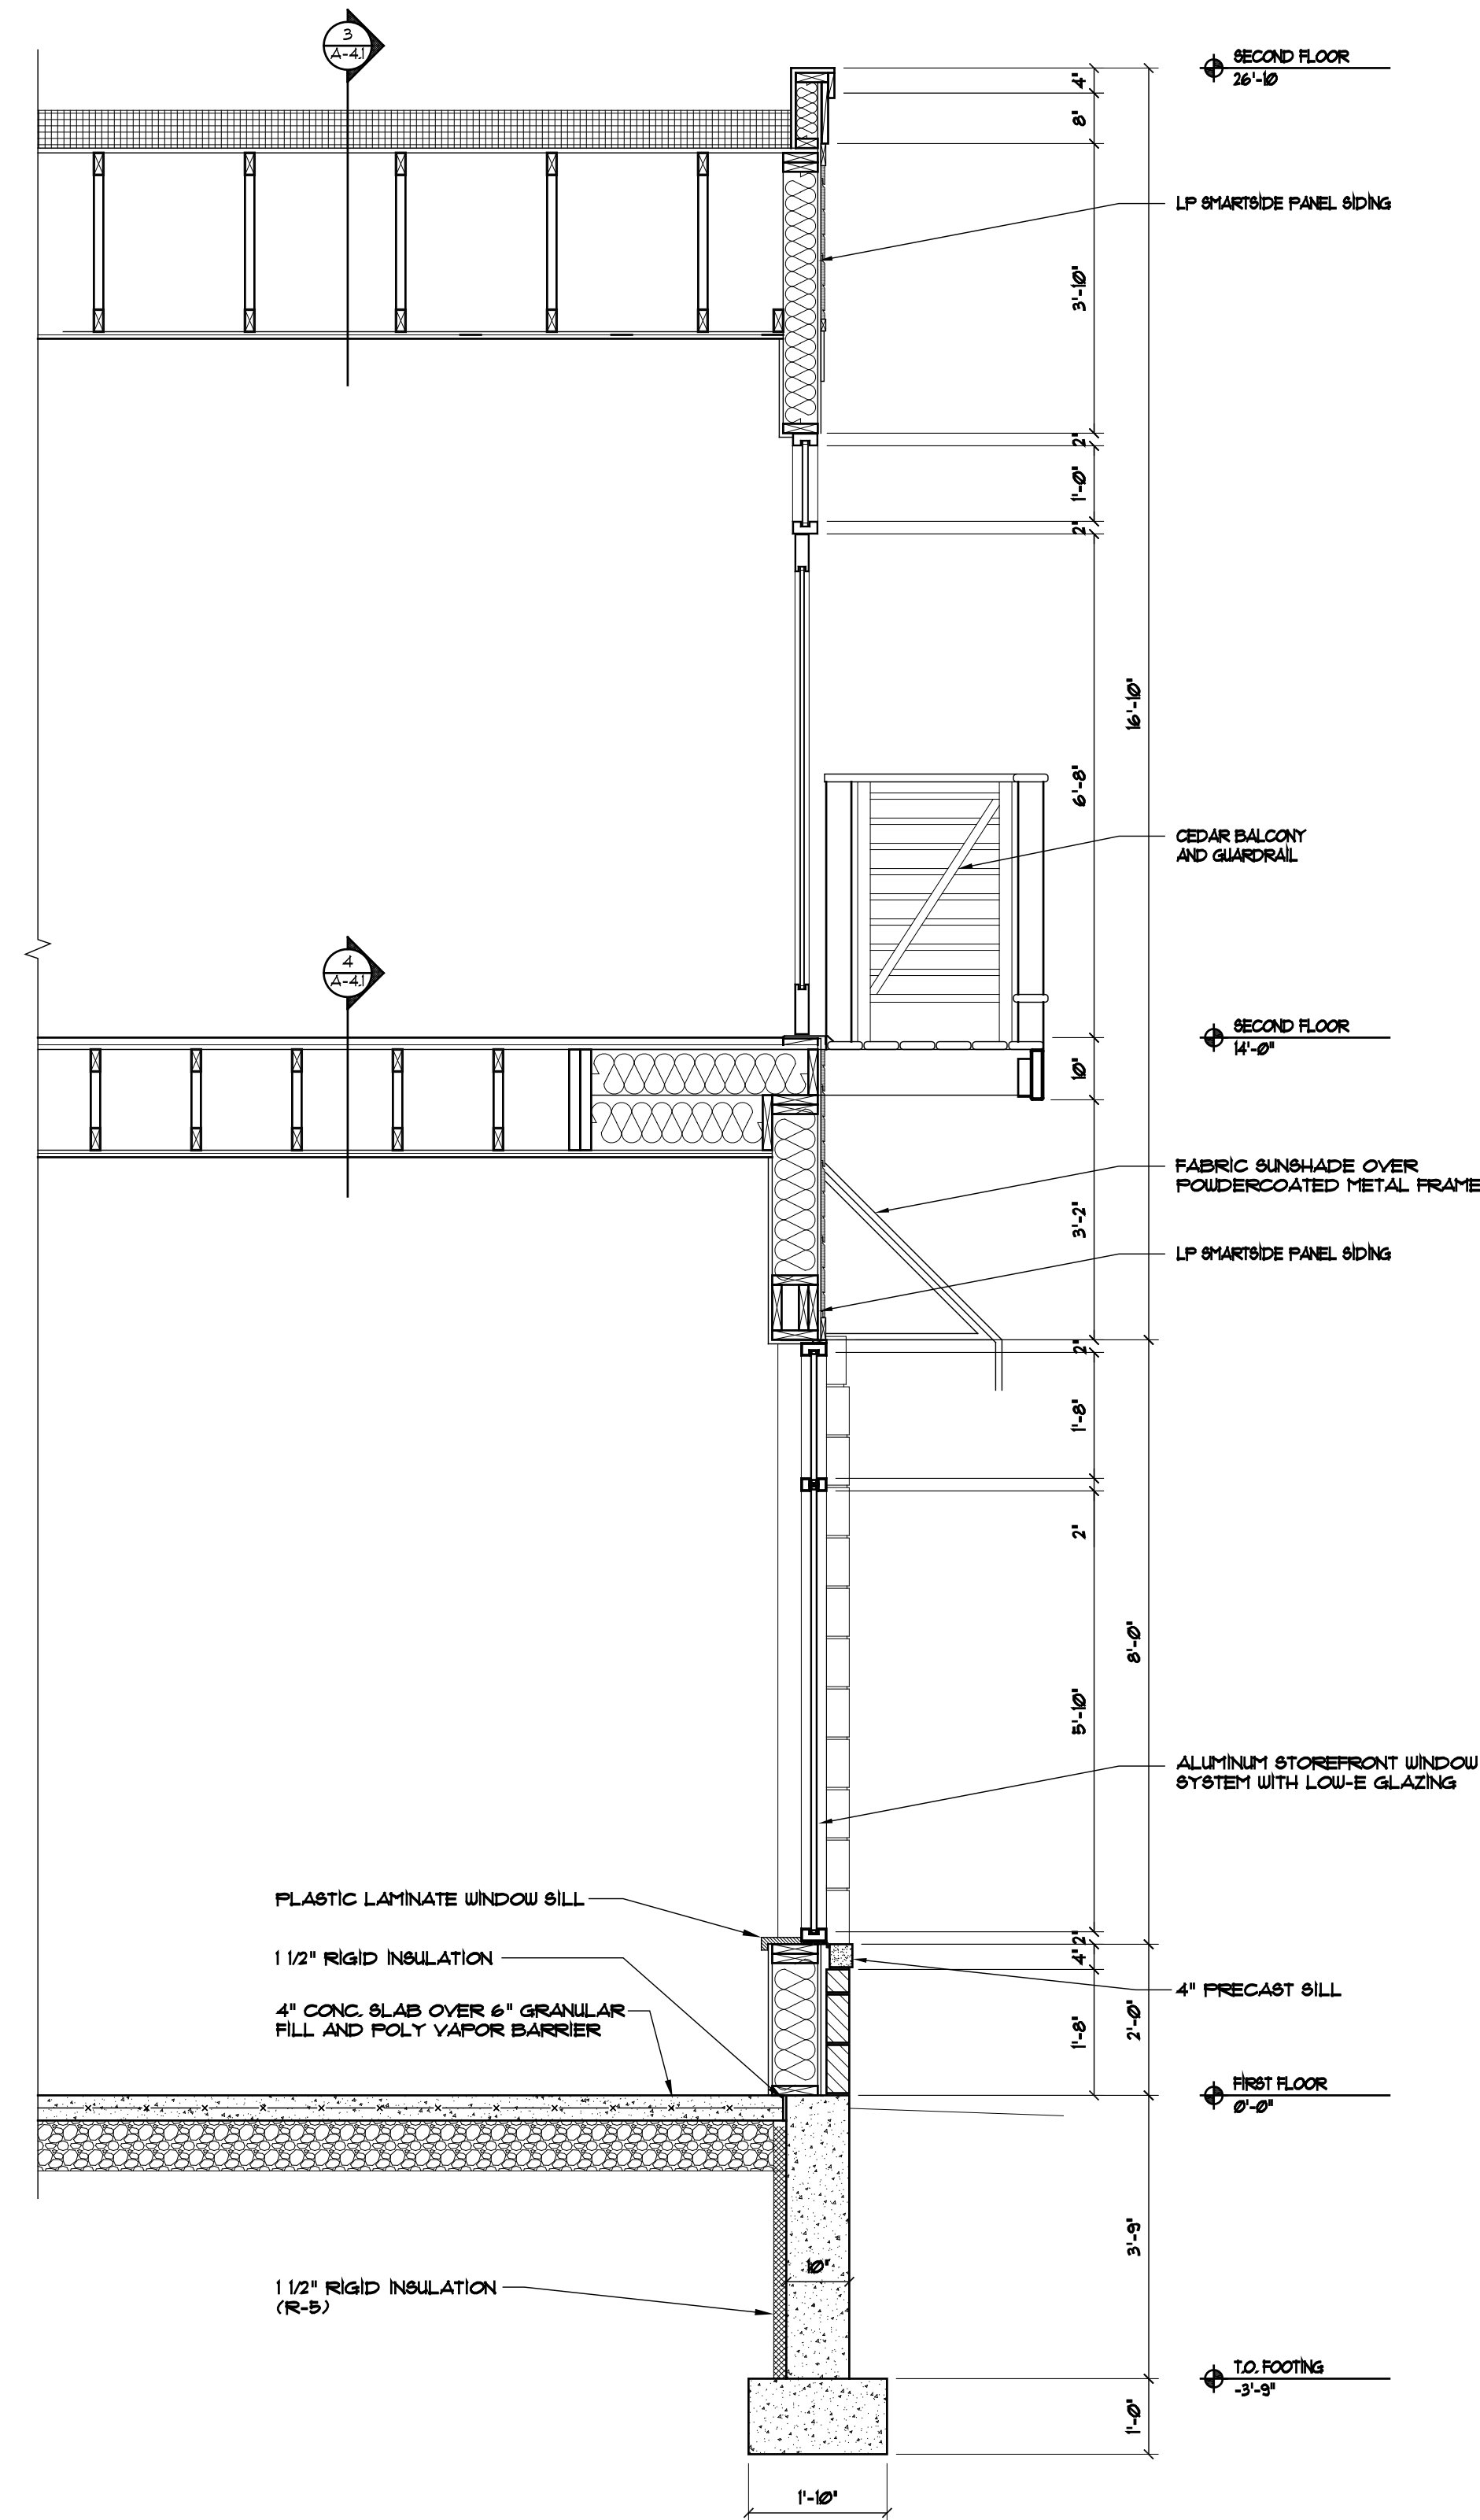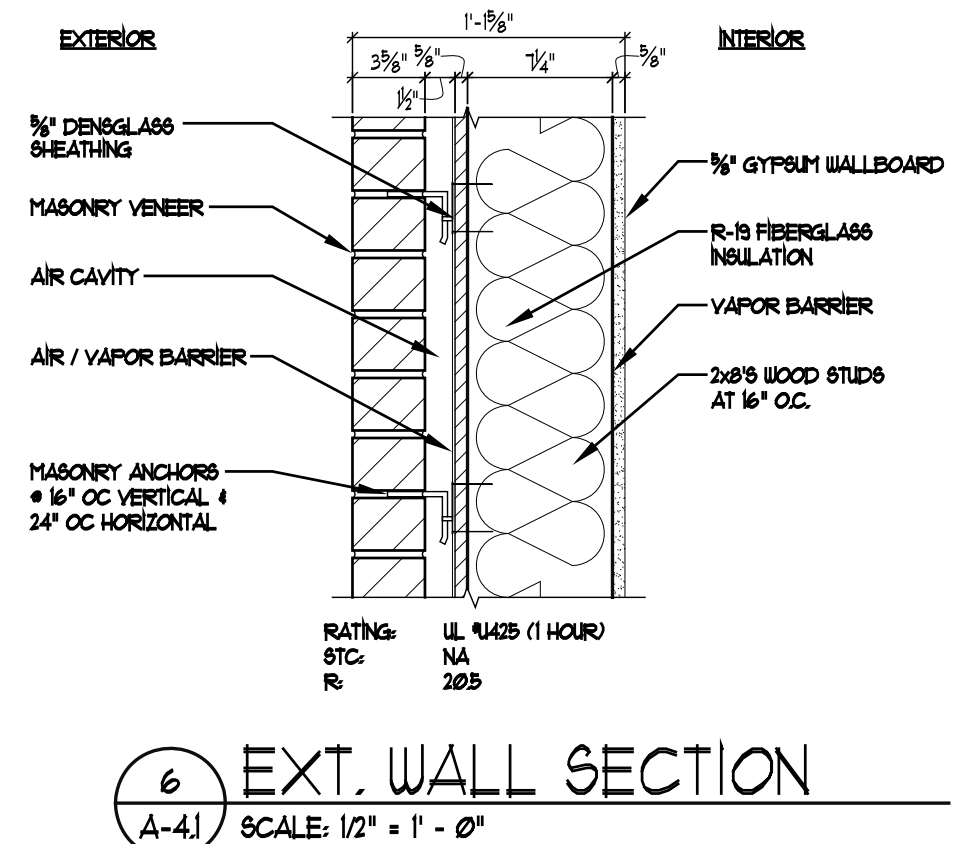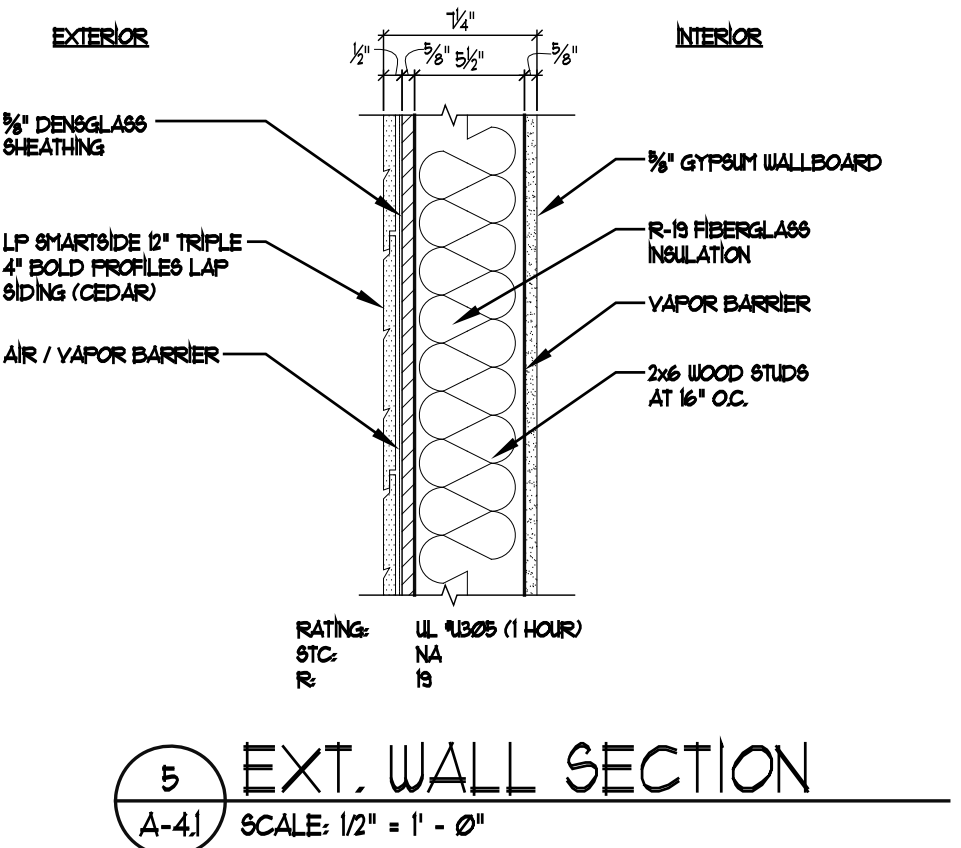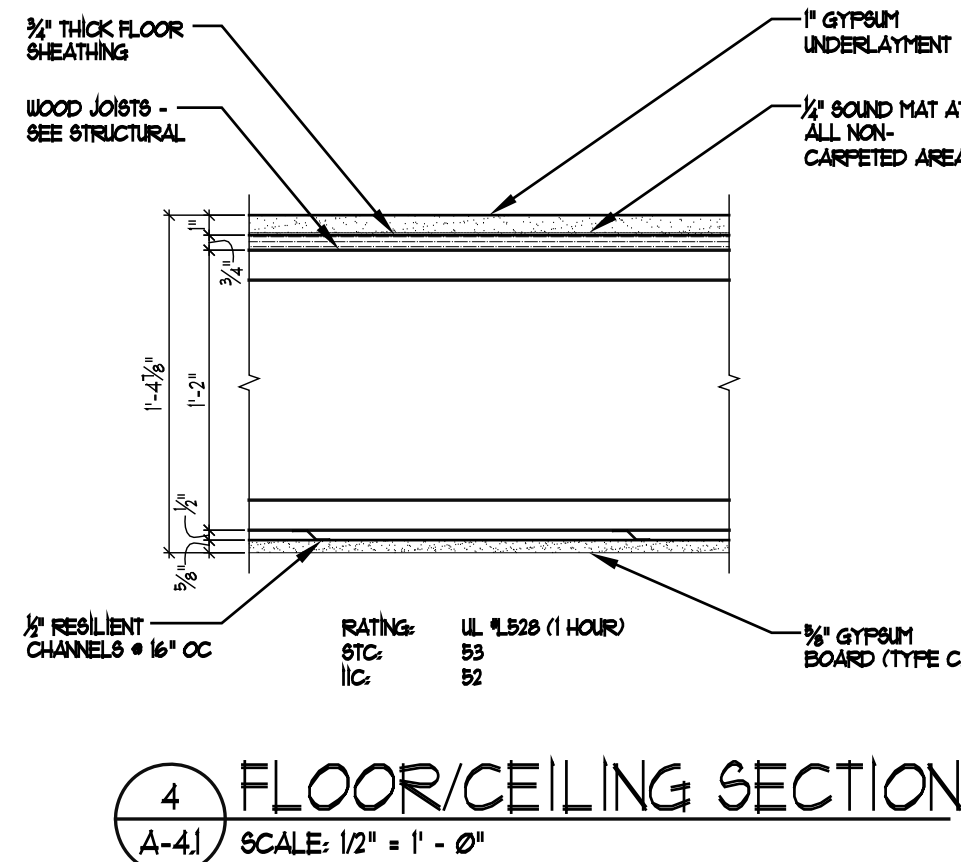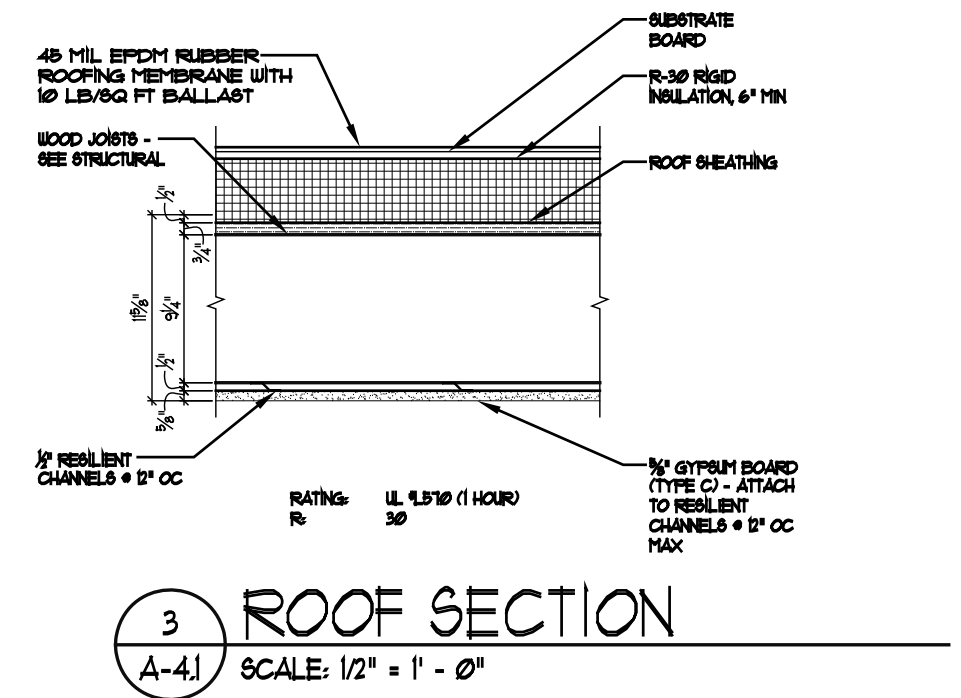



1 EXISTING SITE DEMOLITION PLAN
C-10 SCALE: 1" = 20' - 0"



GENERAL NOTES:

1. ALL WORK TO BE PERFORMED ON SITE AND ADJACENT RIGHT-OF-WAY TO BE COORDINATED WITH TJK DESIGN, CIVIL AND SOILS ENGINEERS, AND INFORMATION WITHIN CITY OF MADISON CITY ENGINEERING DIVISION PROJECT NUMBER 53B2244 DOCUMENTS.
2. REMOVE AND DISPOSE OF ALL EXISTING LANDSCAPING, TREES, AND STUMPS.

PARKING LOT PLAN SITE INFORMATION BLOCK

SITE ADDRESS: MADISON, WISCONSIN
 SITE ACREAGE (TOTAL): 15,254 SQ. FT. ± 0.36 ACRES
 NUMBER OF BUILDING STORIES (ABOVE GRADE): 2
 BUILDING HEIGHT: 26'-10"
 TYPE OF CONSTRUCTION (NEW STRUCTURES OR ADDITIONS): SB, NOT SPRINKLED
 TOTAL SQUARE FOOTAGE OF BUILDING: 9,335 SQ. FT.
 USE OF PROPERTY: COMMERCIAL / RESIDENTIAL
 GROSS SQUARE FEET OF OFFICE: 4,691 SQ. FT.
 GROSS SQUARE FEET OF RESIDENTIAL AREA: 4,638 SQ. FT.
 NUMBER OF EMPLOYEES IN WAREHOUSE: N/A
 NUMBER OF EMPLOYEES ON PRODUCTION AREA: N/A
 CAPACITY OF RESTAURANT / PLACE OF ASSEMBLY: N/A
 NUMBER OF BICYCLE STALLS SHOWN: 9 SHOWN
 NUMBER OF PARKING STALLS (TOTAL SITE):

STALLS REQUIRED	SHOWN
STALLS SHOWN ABOVE GROUND	13
ACCESSIBLE	1
TOTAL	14



NUMBER OF TREES SHOWN SEE LANDSCAPE PLAN

SITE INFORMATION

SITE SIZE: 15,254 SQ. FT.
 BLDG. AREA (FOOTPRINT): 4,691 SQ. FT.
 FLOOR AREA RATIO: 29.6%
 PARKING AND WALKS: 8,964 SQ. FT.
 IMPERVIOUS SURFACE AREA: 13,661 SQ. FT.
 IMPERVIOUS SURFACE RATIO: 86.1%
 PARKING RATIO: FUD
 ZONING: FUD

LEGEND:

○	PROPERTY CORNER
—	PROPERTY LINE
—S—	SANITARY SEWER
—ST—	STORM SEWER
—W—	WATER MAIN
⊕	FIRE HYDRANT
⊕	UTILITY POLE
⊕	UTILITY POLE W/ LIGHT
○	MANHOLE
⊕	WATER VALVE
—	CURB INLET
—	STORM SEWER ACCESS COVER
⊕	SPOT ELEVATION
⊕	MONITORING WELL
▨	EXISTING BUILDING

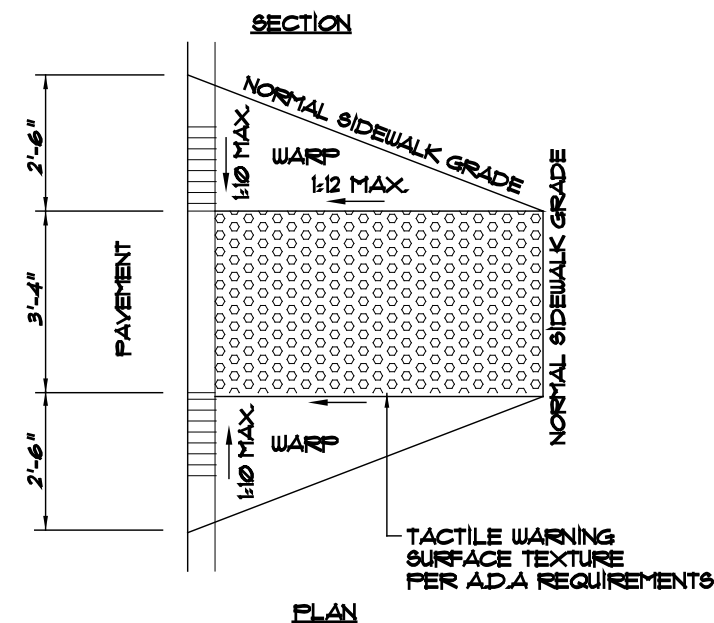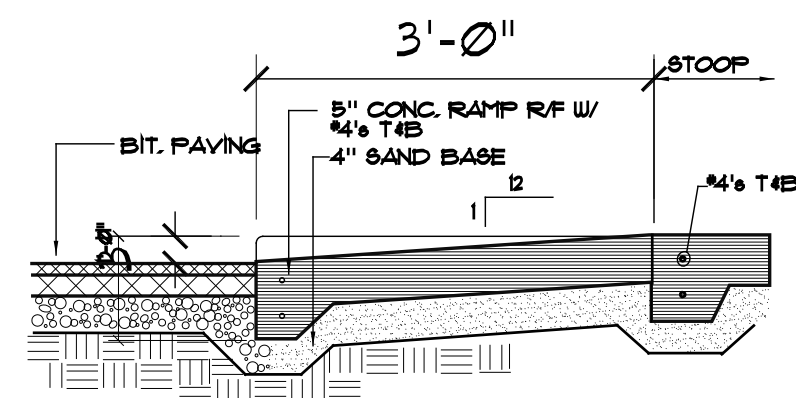

TYPICAL CURB RAMP DETAIL
 SCALE: 1/8" = 1'-0"


GENERAL NOTES:

- ALL PAINT STRIPPING SHALL BE 4" WIDE, YELLOW.
- H.C. CURB CUTS AND RAMPS PER ADA SEC. 4.7 MAX. SLOPE TO BE 1:12, MIN. WIDTH TO BE 36", TRUNCATED DORIES ARE TO BE INSTALLED ON EACH SIDE, DIAMOND MESH SURFACE FULL WIDTH AND DEPTH OF RAMP. SEE DETAIL 2/C-11.
- ALL DIMENSIONS ARE FROM FACE OF CONCRETE WALL, FACE OF CURB OR CENTER OF PROPERTY LINE.
- BITUMINOUS PAVING 18 3" SURFACE COURSE ON 8" COMPACTED STONE BASE (APPROXIMATE ASPHALTIC AREA: 13,660 SQ. FT.)
- ALL EXTERIOR CONCRETE SIDEWALKS TO BE 6" BAG MIX WITH WESTERN FINISH 5" THICK W/ W/F REINFORCING ON 6" COMPACTED FILL (AREA OF SIDEWALKS: 1,400 SQ. FT.)
- WATER SERVICE MATERIAL SHALL BE 2" COPPER
- SEWER AND WATER CONSTRUCTION SHALL BE COMPLETED IN ACCORDANCE WITH THE CITY OF MADISON STANDARD SPECIFICATION FOR PUBLIC WORKS CONSTRUCTION.
- DRIVEWAY APRON CONSTRUCTION WITHIN THE PUBLIC RIGHT OF WAY SHALL BE CONSTRUCTED IN ACCORDANCE WITH CITY OF MADISON STANDARDS
- EXISTING WATERMAIN VALVES SHALL BE MARKED AND PROTECTED FOR DURATION OF CONSTRUCTION
- SLOPES GREATER THAN 3:1 SHALL BE LINED WITH EROSION MATTING
- TRACKED MATERIAL SHALL BE COLLECTED BY THE GENERAL CONTRACTOR AT THE END OF EACH WORKING DAY OR AS REQUIRED BY THE CITY
- ACCESSIBLE SIGNAGE AT THE HEAD OF STALLS SHALL BE A MINIMUM OF 60 INCHES BETWEEN THE BOTTOM OF THE SIGN AND THE GROUND
- PROVIDE KNOX BOX FOR THE FIRE DEPARTMENT. COORDINATE LOCATION WITH FIRE DEPARTMENT PRIOR TO INSTALLATION.
- ALL "STOP" SIGNS ARE TO BE INSTALLED AT A HEIGHT OF 1 FEET AT ALL DRIVEWAY APPROACHES BEHIND THE PROPERTY LINE


LIGHT FIXTURE KEY

- Ⓐ COOPER LIGHTING, INVUE 400W MH SINGLE HEAD PARKING LOT LIGHT FIXTURES MODEL # CH-115-MH-208-9L-DP 12'-0" X 4" SQ STEEL POLE ON 3'-0" CONC. BASE (15'-0" FROM GRADE)
- Ⓑ COOPER LIGHTING, INVUE ENTRI LED WAL-PAC LIGHT FIXTURE CATALOG # ENC-C01-LED-EI-BL4-DP (9'-0" FROM GRADE)
- Ⓒ COOPER LIGHTING, INVUE ENTRI LED WAL-PAC LIGHT FIXTURE CATALOG # ENC-C01-LED-EI-G2U-DP (8'-0" FROM GRADE)


TO OBTAIN LOCATIONS OF PARTICIPANTS UNDERGROUND FACILITIES BEFORE YOU DIG IN WISCONSIN



CALL DIGGERS HOTLINE 1-800-242-8811 TOLL FREE
 WIS STATUTE 102.07(1)(14) REQUIRES 7-11:30 WORK DAYS NOTICE BEFORE YOU EXCAVATE

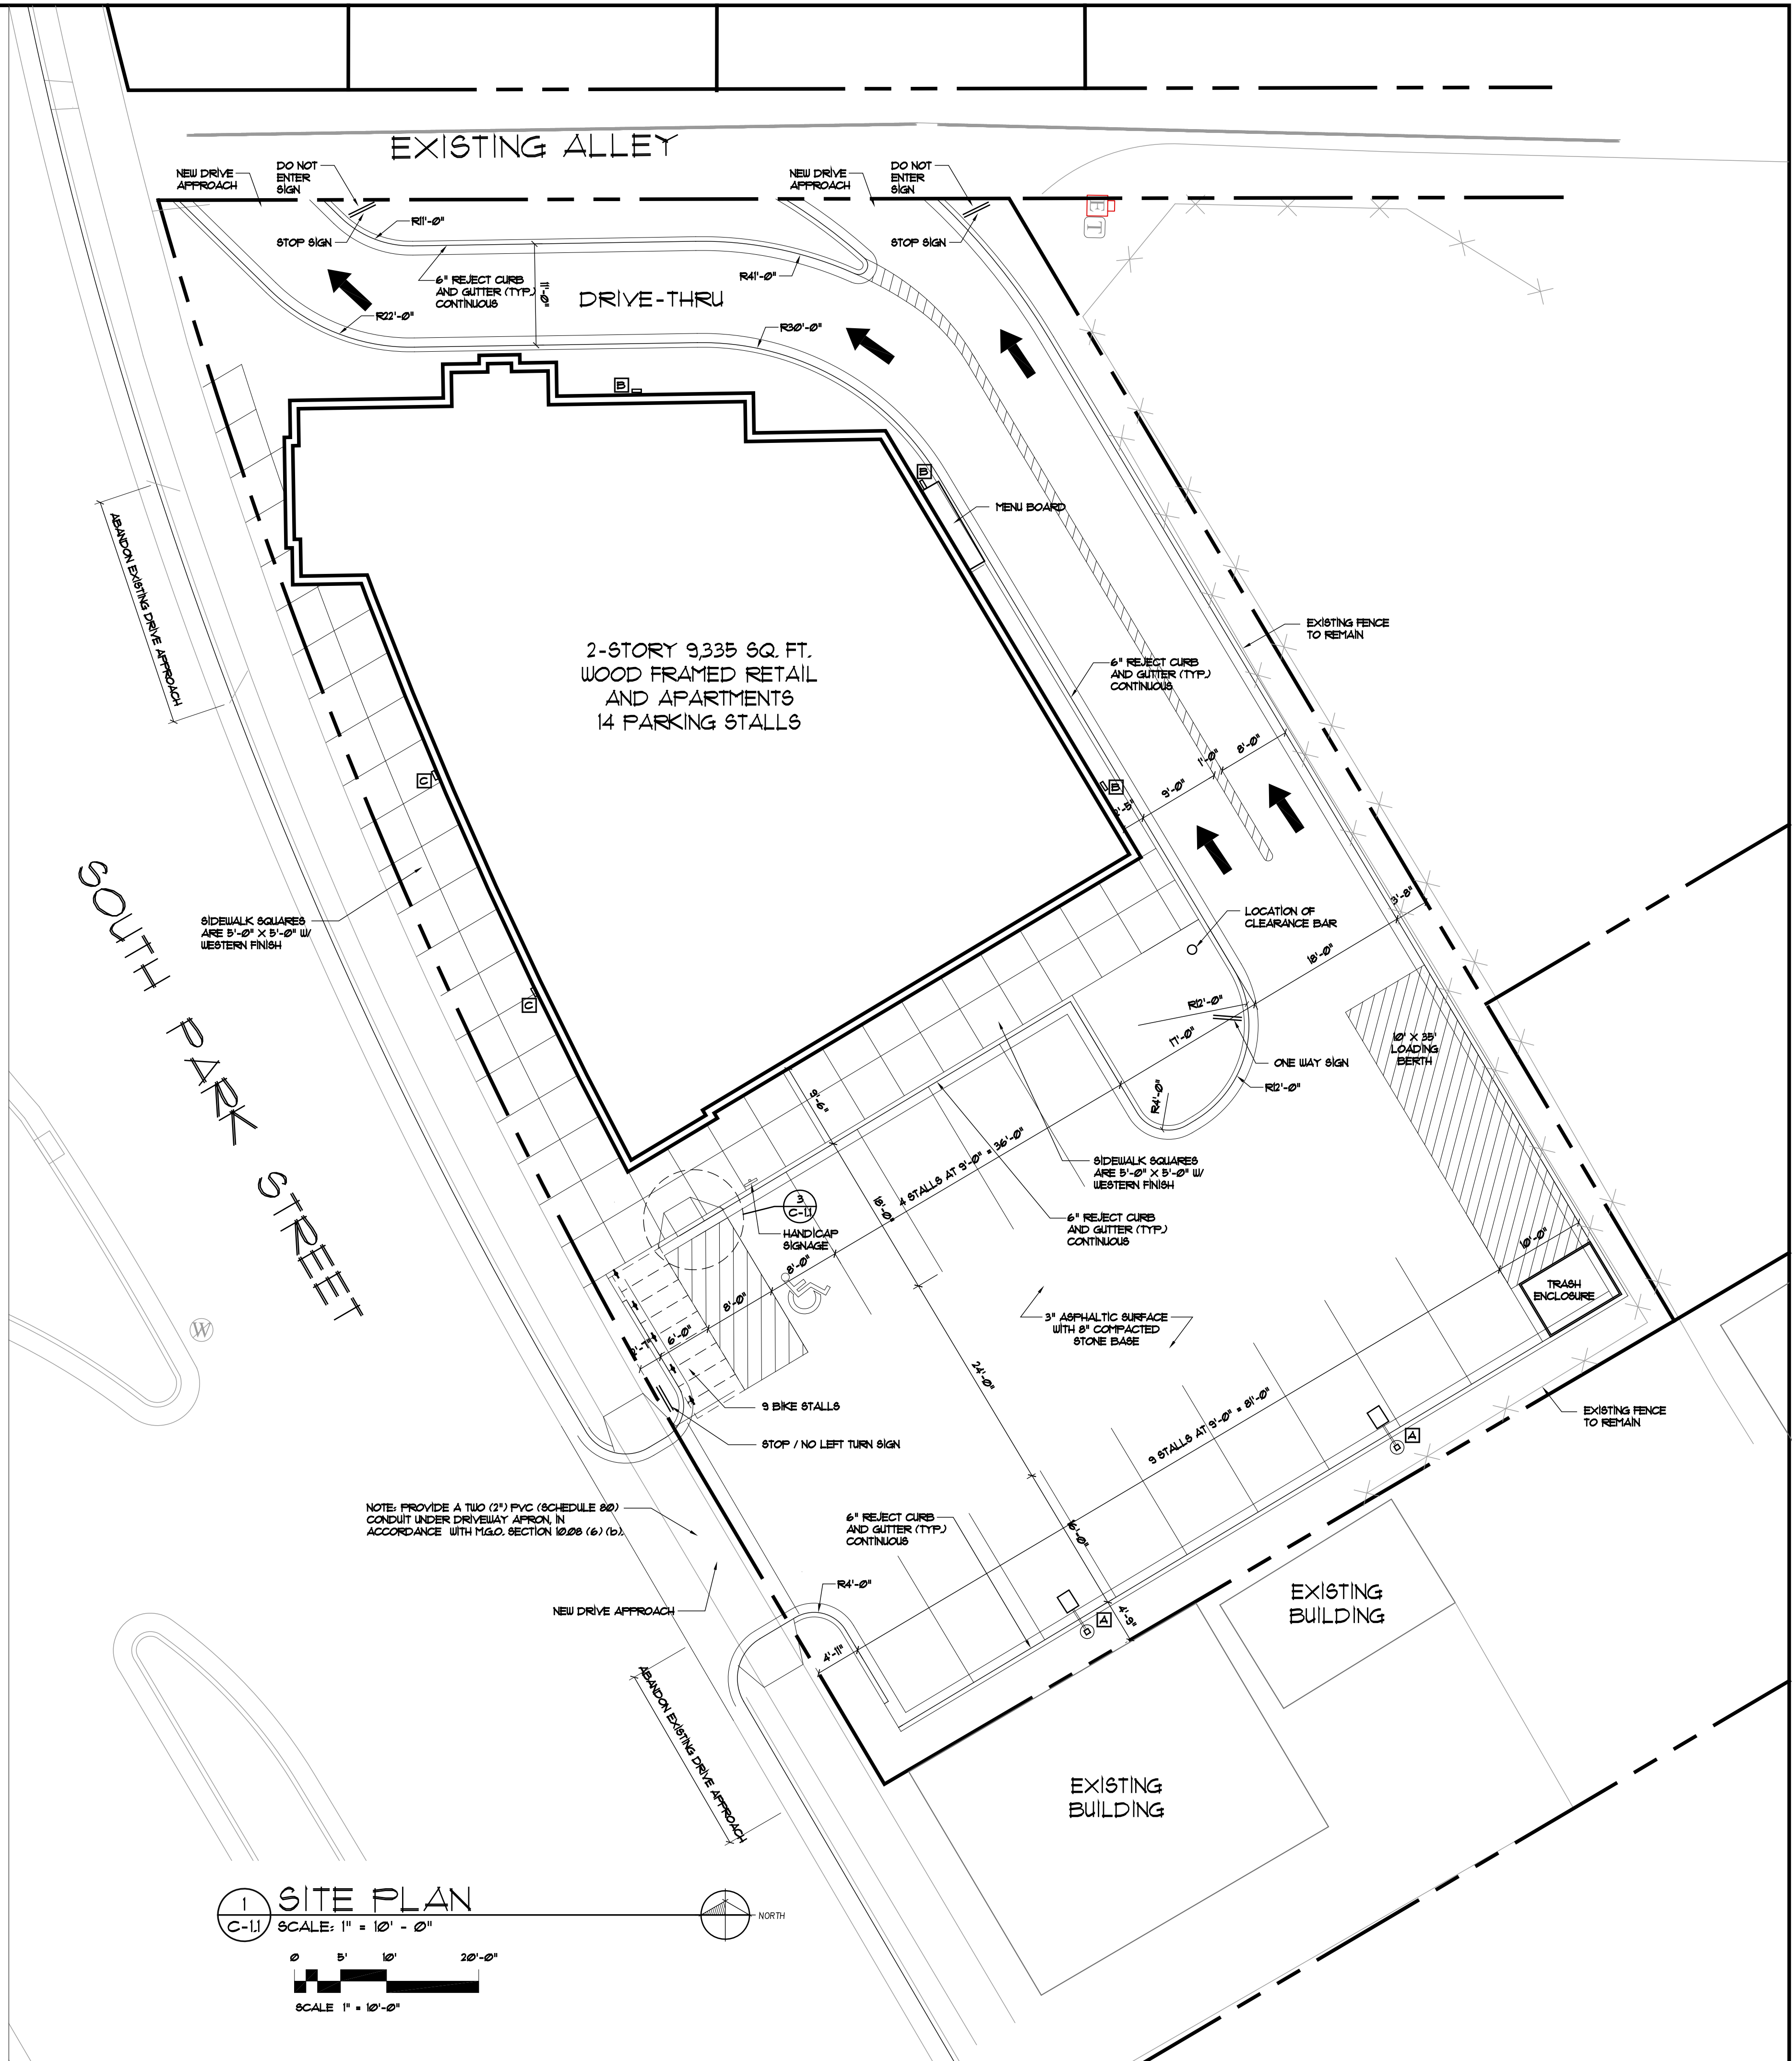

① SITE PLAN
 SCALE: 1" = 10'-0"

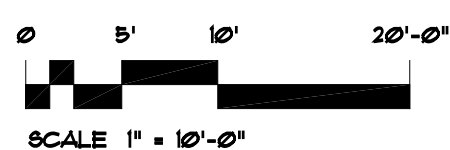

TJK
 DESIGN BUILD

634 West Main Street
 Madison, WI 53710
 608-251-1090
 FAX 608-251-1092


REV DATE

COPYRIGHTED DRAWING
 © 2011 TJK Design Build, Inc. ALL RIGHTS RESERVED. NEITHER THIS DOCUMENT NOR THE INFORMATION HEREIN MAY BE REPRODUCED, DISTRIBUTED, USED OR DISCLOSED IN WHOLE OR IN PART, UNLESS EXPRESSLY AUTHORIZED IN WRITING BY TJK DESIGN BUILD, INC.

PROPOSED FACILITY FOR:
 ERIN SQUARE
 801 SOUTH PARK STREET
 MADISON, WISCONSIN

C-1.1

11.7.11

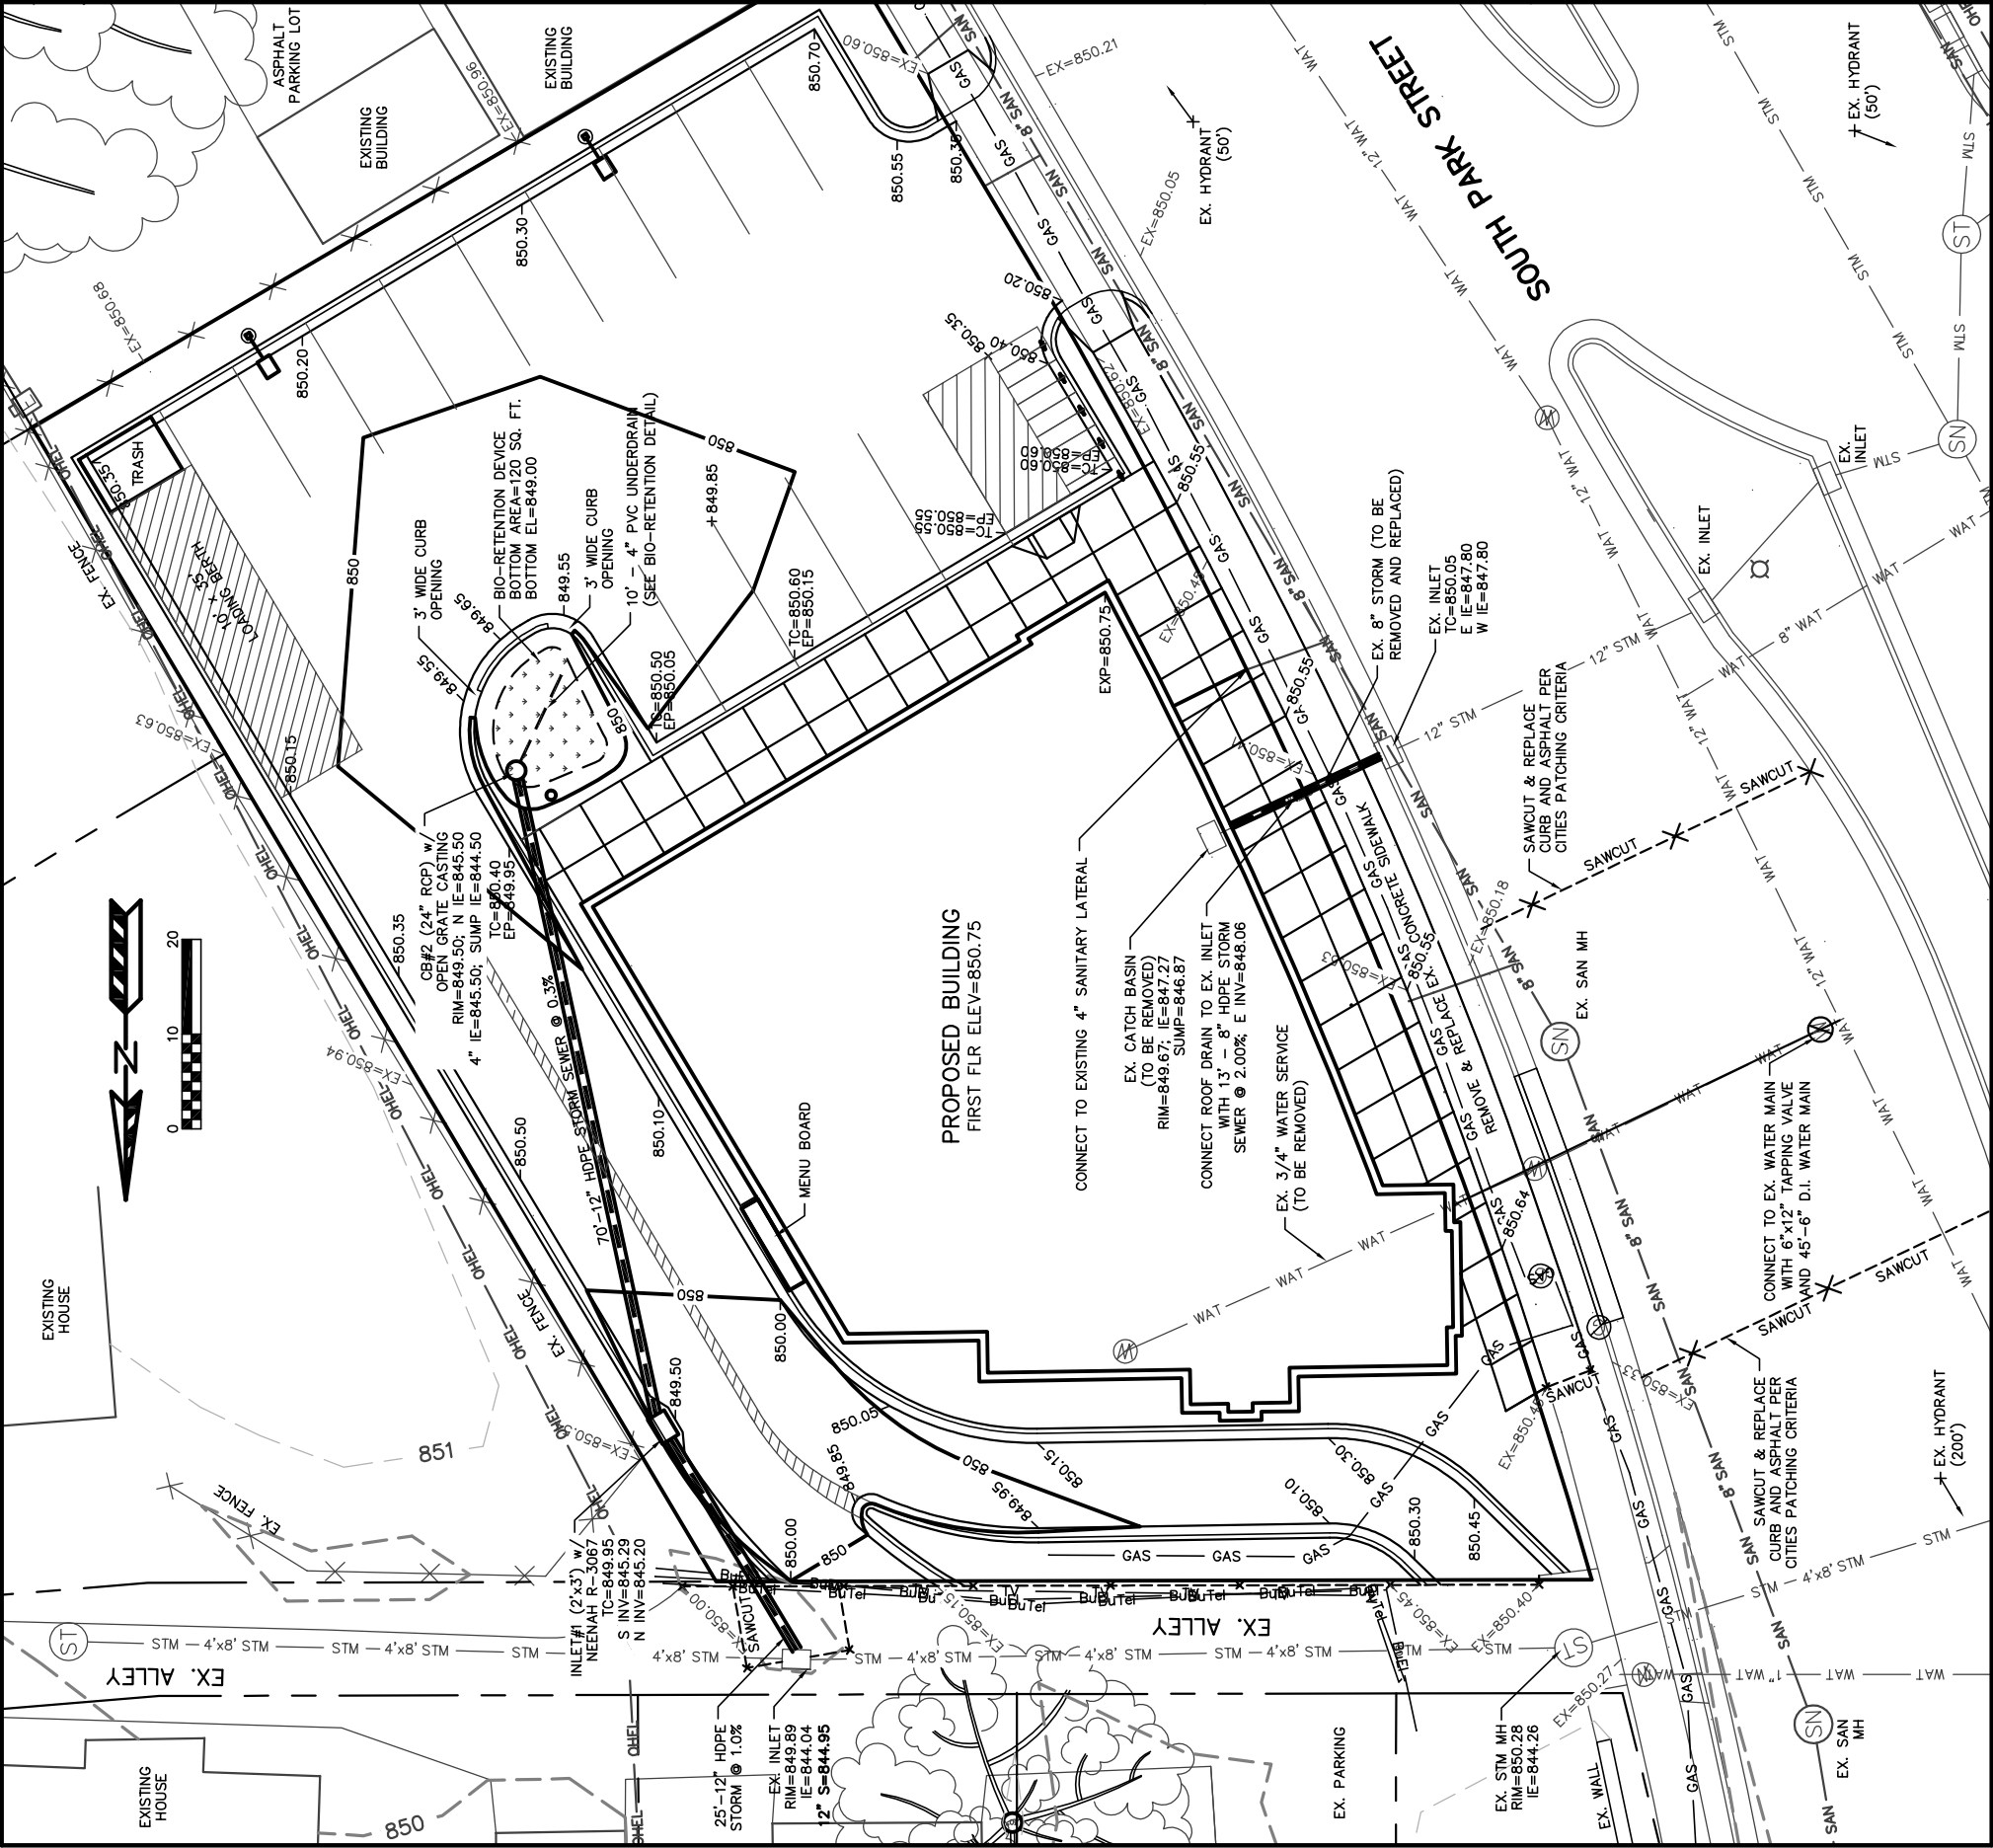

UTILITY NOTES:

ALL WORK IN THE PUBLIC RIGHT-OF-WAY SHALL BE PERFORMED BY A PRE-APPROVED CONTRACTOR AUTHORIZED TO WORK IN THE RIGHT-OF-WAY. THE CONTRACTOR SHALL REPLACE ALL DAMAGED SIDEWALK AND CURB AS DIRECTED BY THE CITY CONSTRUCTION ENGINEER.

THE CONTRACTOR SHALL OBTAIN A STREET EXCAVATION PERMIT FOR THE INSTALLATION OF UTILITIES REQUIRED TO SERVE THIS PROJECT. THE CONTRACTOR SHALL PAY THE PERMIT FEE, INSPECTION FEE, AND STREET DEGRADATION FEE AND SHALL COMPLY WITH ALL CONDITIONS OF THE PERMIT.

THE CONTRACTOR SHALL OBTAIN A PERMIT TO PLUG EACH EXISTING SANITARY SEWER LATERAL THAT SERVES A BUILDING THAT IS PROPOSED FOR DEMOLITION. FOR EACH LATERAL TO BE PLUGGED, THE OWNER SHALL DEPOSIT \$1,000 WITH THE CITY ENGINEER IN TWO SEPARATE CHECKS IN THE FOLLOWING AMOUNTS: (1) \$500 TO BE DEPOSITED WITHIN 10 BUSINESS DAYS OF THE PERMIT DATE AND (2) \$500 TO BE DEPOSITED WITHIN 10 BUSINESS DAYS OF THE PLUGGING DATE. THE PLUGGING OF A LATERAL BY PRIVATE CONTRACTOR AND THE PLUGGING IS INSPECTED AND APPROVED BY THE CITY ENGINEER, THE \$900 FEE SHALL BE REFUNDED TO THE OWNER.

ALL SANITARY SEWER AND WATER MAIN CONSTRUCTION SHALL BE IN COMPLIANCE WITH THE CITY OF MADISON AND WISCONSIN DEPARTMENT OF COMMERCE STANDARDS.

ALL WATER MAIN SHALL BE BURIED TO A DEPTH OF 6.5 FEET. THE DEPTH IS DEFINED AS THE DISTANCE BETWEEN THE FINISHED GRADE ELEVATION AND THE TOP OF WATER MAIN OR SERVICE.

ANY UTILITIES WHICH ARE DAMAGED BY THE CONTRACTOR SHALL BE REPAIRED TO THE OWNER'S SATISFACTION AT THE CONTRACTOR'S EXPENSE.

ALL UNDERGROUND EXTERIOR NON-METALLIC SEWERS/MAINS AND WATER SERVICES/MAINS MUST BE PROVIDED WITH TRACER WIRE OR OTHER METHODS IN ORDER TO BE LOCATED IN ACCORDANCE WITH 182.0715(2) OF STATE STATUTES.

THE PROPOSED ELECTRIC, TELEPHONE AND GAS UTILITY LOCATIONS ARE NOT SHOWN. ACTUAL LOCATIONS AND DESIGN SHALL BE COMPLETED BY OTHERS.

ANY DAMAGE TO PARK STREET AND ALLEY PAVEMENTS WILL REQUIRE PATCHING IN ACCORDANCE WITH THE CITY ENGINEERING STREET PATCHING CRITERIA.

THE CONTRACTOR SHALL VERIFY ALL EXISTING UTILITY LOCATIONS, SIZES, MATERIALS, AND ELEVATIONS PRIOR TO CONSTRUCTION.

EROSION NOTES:

THE EXISTING PARKING AREA AGGREGATE WILL SERVE AS THE STONE TACKING PAD DURING CONSTRUCTION. THE TACKING PAD IS TO BE MAINTAINED BY THE CONTRACTOR THROUGHOUT CONSTRUCTION AND MUST BE REPAIRED TO ORIGINAL CONDITIONS IMMEDIATELY AFTER CONSTRUCTION. SEDIMENT REACHING THE PUBLIC ROAD SHALL BE REMOVED BY STREET CLEANING (NOT HYDRAULIC FLUSHING) BEFORE THE END OF EACH WORKDAY.

EROSION CONTROL DEVICES SHALL BE INSTALLED PRIOR TO GRADING OPERATIONS AND SHALL BE PROPERLY MAINTAINED FOR MAXIMUM EFFECTIVENESS UNTIL EROSION IS ESTIMATED TO BE COMPLETE. ALL MAINTENANCE WILL FOLLOW AN INSPECTION WITHIN 24 HOURS.

EROSION CONTROL IS THE RESPONSIBILITY OF THE CONTRACTOR UNTIL ACCEPTANCE OF THIS PROJECT. EROSION CONTROL MEASURES AS SHOWN SHALL BE THE MINIMUM PRECAUTIONS THAT WILL BE ALLOWED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR RECOGNIZING AND CORRECTING ALL EROSION CONTROL PROBLEMS IMMEDIATELY UPON DISCOVERY. EROSION CONTROL MEASURES, AS REQUESTED IN WRITING BY THE STATE OR LOCAL INSPECTORS, OR THE DEVELOPER'S ENGINEER, SHALL BE INSTALLED WITHIN 24 HOURS.

WATERING PROVISION: FOR THE FIRST SIX WEEKS AFTER THE INITIAL STABILIZATION (E.G., SEED & MULCH, EROSION MAT, SOO) OF A DISTURBED AREA, PROVISIONS SHALL BE MADE FOR WATERING WHENEVER MORE THAN 7 DAYS OF DRY WEATHER ELAPSE.

SOIL STOCKPILES: A ROW OF SILT FENCE PLACED DOWNSLOPE AND AT LEAST 10 FEET AWAY FROM THE STOCKPILE SHALL PROTECT ALL STOCKPILES. SOIL STOCKPILES THAT ARE INACTIVE FOR MORE THAN 14 CONSECUTIVE DAYS SHALL BE STABILIZED WITH SEED & MULCH, EROSION MAT, POLYMER, OR COVERED WITH TARPS OR SIMILAR MATERIAL. NO STOCKPILE SHALL BE PLACED WITHIN 20 FEET OF A DRAINAGE WAY.

SILT FENCE AND STOCKPILES SHALL BE FIELD LOCATED BY THE ENGINEER.

ADDITIONAL EROSION CONTROL MEASURES WILL BE INSTALLED AS NEEDED.

TIME SCHEDULE:

NOVEMBER 21, 2011
INSTALL EROSION CONTROL DEVICES.

NOVEMBER 21 - DECEMBER 11, 2011
REMOVE EXISTING BUILDING, FOUNDATION, AND ASPHALT PARKING LOT.

DEC. 11, 2011 - AUGUST 15, 2012
CONSTRUCT BUILDING, UTILITIES, SIDEWALK, PARKING LOT, AND RESTORE DISTURBED AREAS.

RESTORATION NOTES:

PREVIOUS DISTURBED AREAS SHALL RECEIVE A MINIMUM OF FOUR (4) INCHES OF TOPSOIL, SEED AND MULCH. ALL PREVIOUS DISTURBED AREAS SHALL BE RESTORED TO ORIGINAL OR BETTER CONDITION. SEED MIXTURES SHALL BE USED FOR THE BOTTOM OF THE DETENTION POND. SEED MIXTURE 40 SHALL BE USED ON ALL OTHER DISTURBED AREAS. MIXTURES SHALL BE IN ACCORDANCE WITH SECTION 630 OF D.O.T. SPECIFICATIONS. AN EQUAL AMOUNT OF ANNUAL RYEGRASS SHALL BE ADDED TO THE MIX.

SEED MIXTURES SHALL BE APPLIED AT THE RATE OF FOUR (4) POUNDS PER 1,000 SQUARE FEET.

FERTILIZER SHALL BE APPLIED AT THE RATE OF FOUR (4) POUNDS PER 1,000 SQUARE FEET.

SEEDING SHALL BE APPLIED AT THE RATE OF FOUR (4) POUNDS PER 1,000 SQUARE FEET.



MULCH SHALL CONSIST OF HAY OR STRAW APPLIED AT THE RATE OF 2 TONS PER ACRE. FERTILIZER SHALL MEET THE MINIMUM REQUIREMENTS THAT FOLLOW: NITROGEN, NOT LESS THAN 16%; PHOSPHORIC ACID, NOT LESS THAN 8%; POTASH, NOT LESS THAN 8%.

OWNER:
???????????

ENGINEER:
QUAM ENGINEERING, LLC
4604 SIGGELKOW ROAD, SUITE A
MCFARLAND, WI 53558

LEGEND:

---	851	---	EXISTING MINOR CONTOUR.
---	850	---	EXISTING MAJOR CONTOUR.
---	851	---	PROPOSED MAJOR CONTOUR.
---	850	---	PROPOSED MAJOR CONTOUR.
---	850.00	---	PROPOSED SPOT ELEVATION
---	850.00	---	PROPOSED TOP OF WALL ELEVATION
---	850.60	---	FIRST FLOOR ELEVATION.
---	850.00	---	BUILDING EXPOSURE ELEVATION.

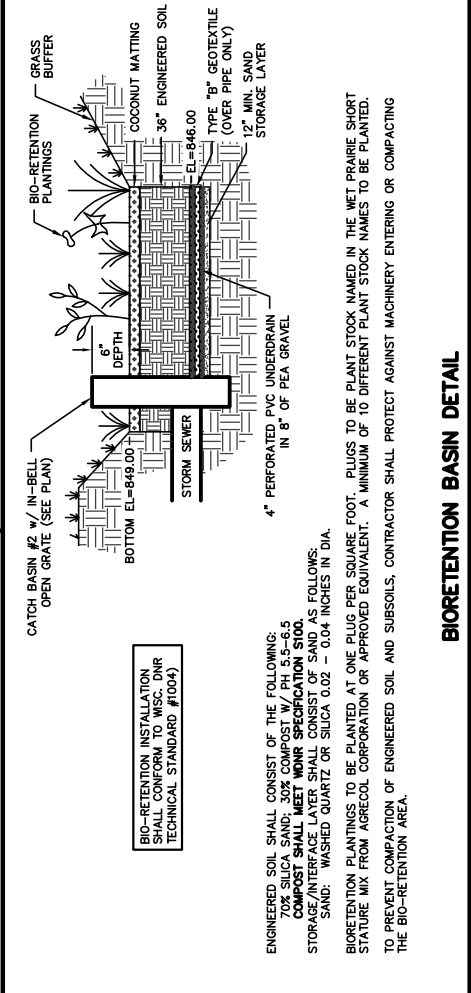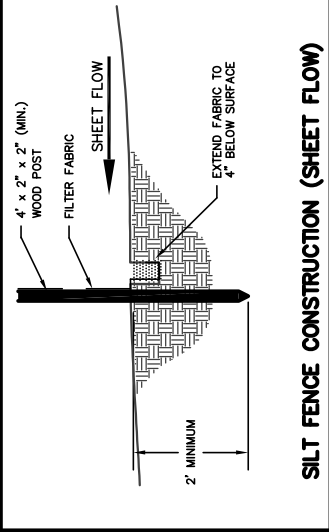

LANDSCAPE WORKSHEET

I. Number of Trees Required

The number of trees required for a parking lot is based on the number of parking stalls. Using the Schedule for Required Trees on the reverse side of this worksheet, determine the number of trees required. (Example: One tree is required for 10 parking stalls).

Landscape requirements for storage areas are determined by dividing the total square footage of the storage area by (300) square feet. This converts area to stalls.
[Example: 10,000 square feet is equivalent to (33) stalls or (3) trees and (160) points].

Number of Parking Stalls14

Total Square Footage of the Storage Area
Divided by Three Hundred (300) Square Feet1

TOTAL3

Number of Canopy Shade Trees Required (2" - 2 1/2" Caliper)
(See Schedule on reverse side)

II. Number of Landscape Points Required

The number of points required is also based on the number of parking stalls. Using the Point Schedule for Landscape Elements on the reverse side of this worksheet, determine the number of points required. (Example: 49.5 points are required for 10 stalls). A point fraction of (.5) or less may be disregarded, while a fraction in excess of (.5) must be counted as one point. Thus: 49.5 points would be rounded down to 49.0 points required.

The number of points required for loading areas is (75) points for each loading berth.
(See Schedule on reverse side)

69

75

TOTAL144

Number of Points Required (See Schedule on reverse side)

Tabulation of Points and Credits

Indicate below the quantity and points for all pertinent landscape elements. Also, credit information for boundary screening and any existing elements to be retained.


ELEMENT	POINT VALUE	QUANTITY	POINTS ACHIEVED	CREDITS	
				QUANTITY	POINTS
Canopy Tree: 2" - 2 1/2"	35			2	70
Deciduous Shrub	2				
Evergreen Shrub	3				
Decorative Wall or Fence (per 10 L.F.)	5				
Earth Berm (per 10 L.F.) Avg. Height 30" Avg. Height 15"	5 2				
Evergreen Trees 3' height minimum	15	18	270		
Canopy Tree or Small Tree 1 1/2" - 2" Caliper (i.e., Crab, Hawthorn)	15	3	45		
Sub Totals		315		+	70
				TOTAL	385

Total No. of Points Provided
(Equal to or greater than points required)

*Trees required in Part I above, are not to be included in the point count.

PLANT SCHEDULE AND LEGEND


Key	Botanical Name	Common Name	Qty	Planting Size	Root Spec	Spacing	Comments
Major Deciduous Trees							
AR	Acer rubrum 'Red Sunset'	Red Sunset Maple	1	2-2 1/2" cal	B&B	As shown	Straight leader
CJ	Cercidiphyllum japonicum	Katsuratre	1	2-2 1/2" cal	B&B	As shown	Straight leader
QR	Quercus robur x bicolor 'Long'	Regal Prince Oak	3	2-2 1/2" cal	B&B	As shown	Straight leader
TCJ	Tilia cordata 'June Bride'	June Bride Littleleaf Linden	2	2-2 1/2" cal	B&B	As shown	Straight leader, matched
Minor Deciduous Trees							
AG	Amelanchier grand. 'Princess Diana'	Princess Diana Serviceberry	3	6' HT min	B&B	As shown	Multi-stem, matched full plants
Evergreens							
JCS	Juniperus chinensis 'Sea Green'	Sea Green Juniper	11	30" HT min	B&B	As shown	Full plants, matched
TMH	Taxus x media 'Hicksii'	Hicks Yew	9	3' HT min	B&B	As shown	Full plants
TEG	Thuja occidentalis 'Emerald Green'	Emerald Green Arborvitae	15	3' HT min	B&B	As shown	Full plants, matched
Deciduous Shrubs							
DG	Deutzia gracilis 'Chardonnay Pearls'	Chardonnay Pearls Deutzia	5	18" HT min	CONT	As shown	Full, matched plants
IV	Itea virginica 'Little Henry'	Little Henry Sweetspire	7	18" HT min	CONT	As shown	Full, matched plants
RR	Rosa rugosa 'Foxi'	Foxi Pavement Rose	3	18" HT min	CONT	As shown	Full, matched plants
Perennials, Grasses and Groundcovers							
ckf	Calamagrostis acutifolia 'Karl Foerster'	Karl Foerster Grass	20	1 GAL	CONT	24" o.c.	Full, matched plants
pap	Pennisetum alope. 'PennStripe'	Var Compact Fountain Grass	44	1 GAL	CONT	24" o.c.	Full, matched plants
ssi	Sedum spectabile 'Iceberg'	Iceberg Sedum	20	1 GAL	CONT	24" o.c.	Full, matched plants
SM	Stone Mulch						
BM	Shredded Bark Mulch						

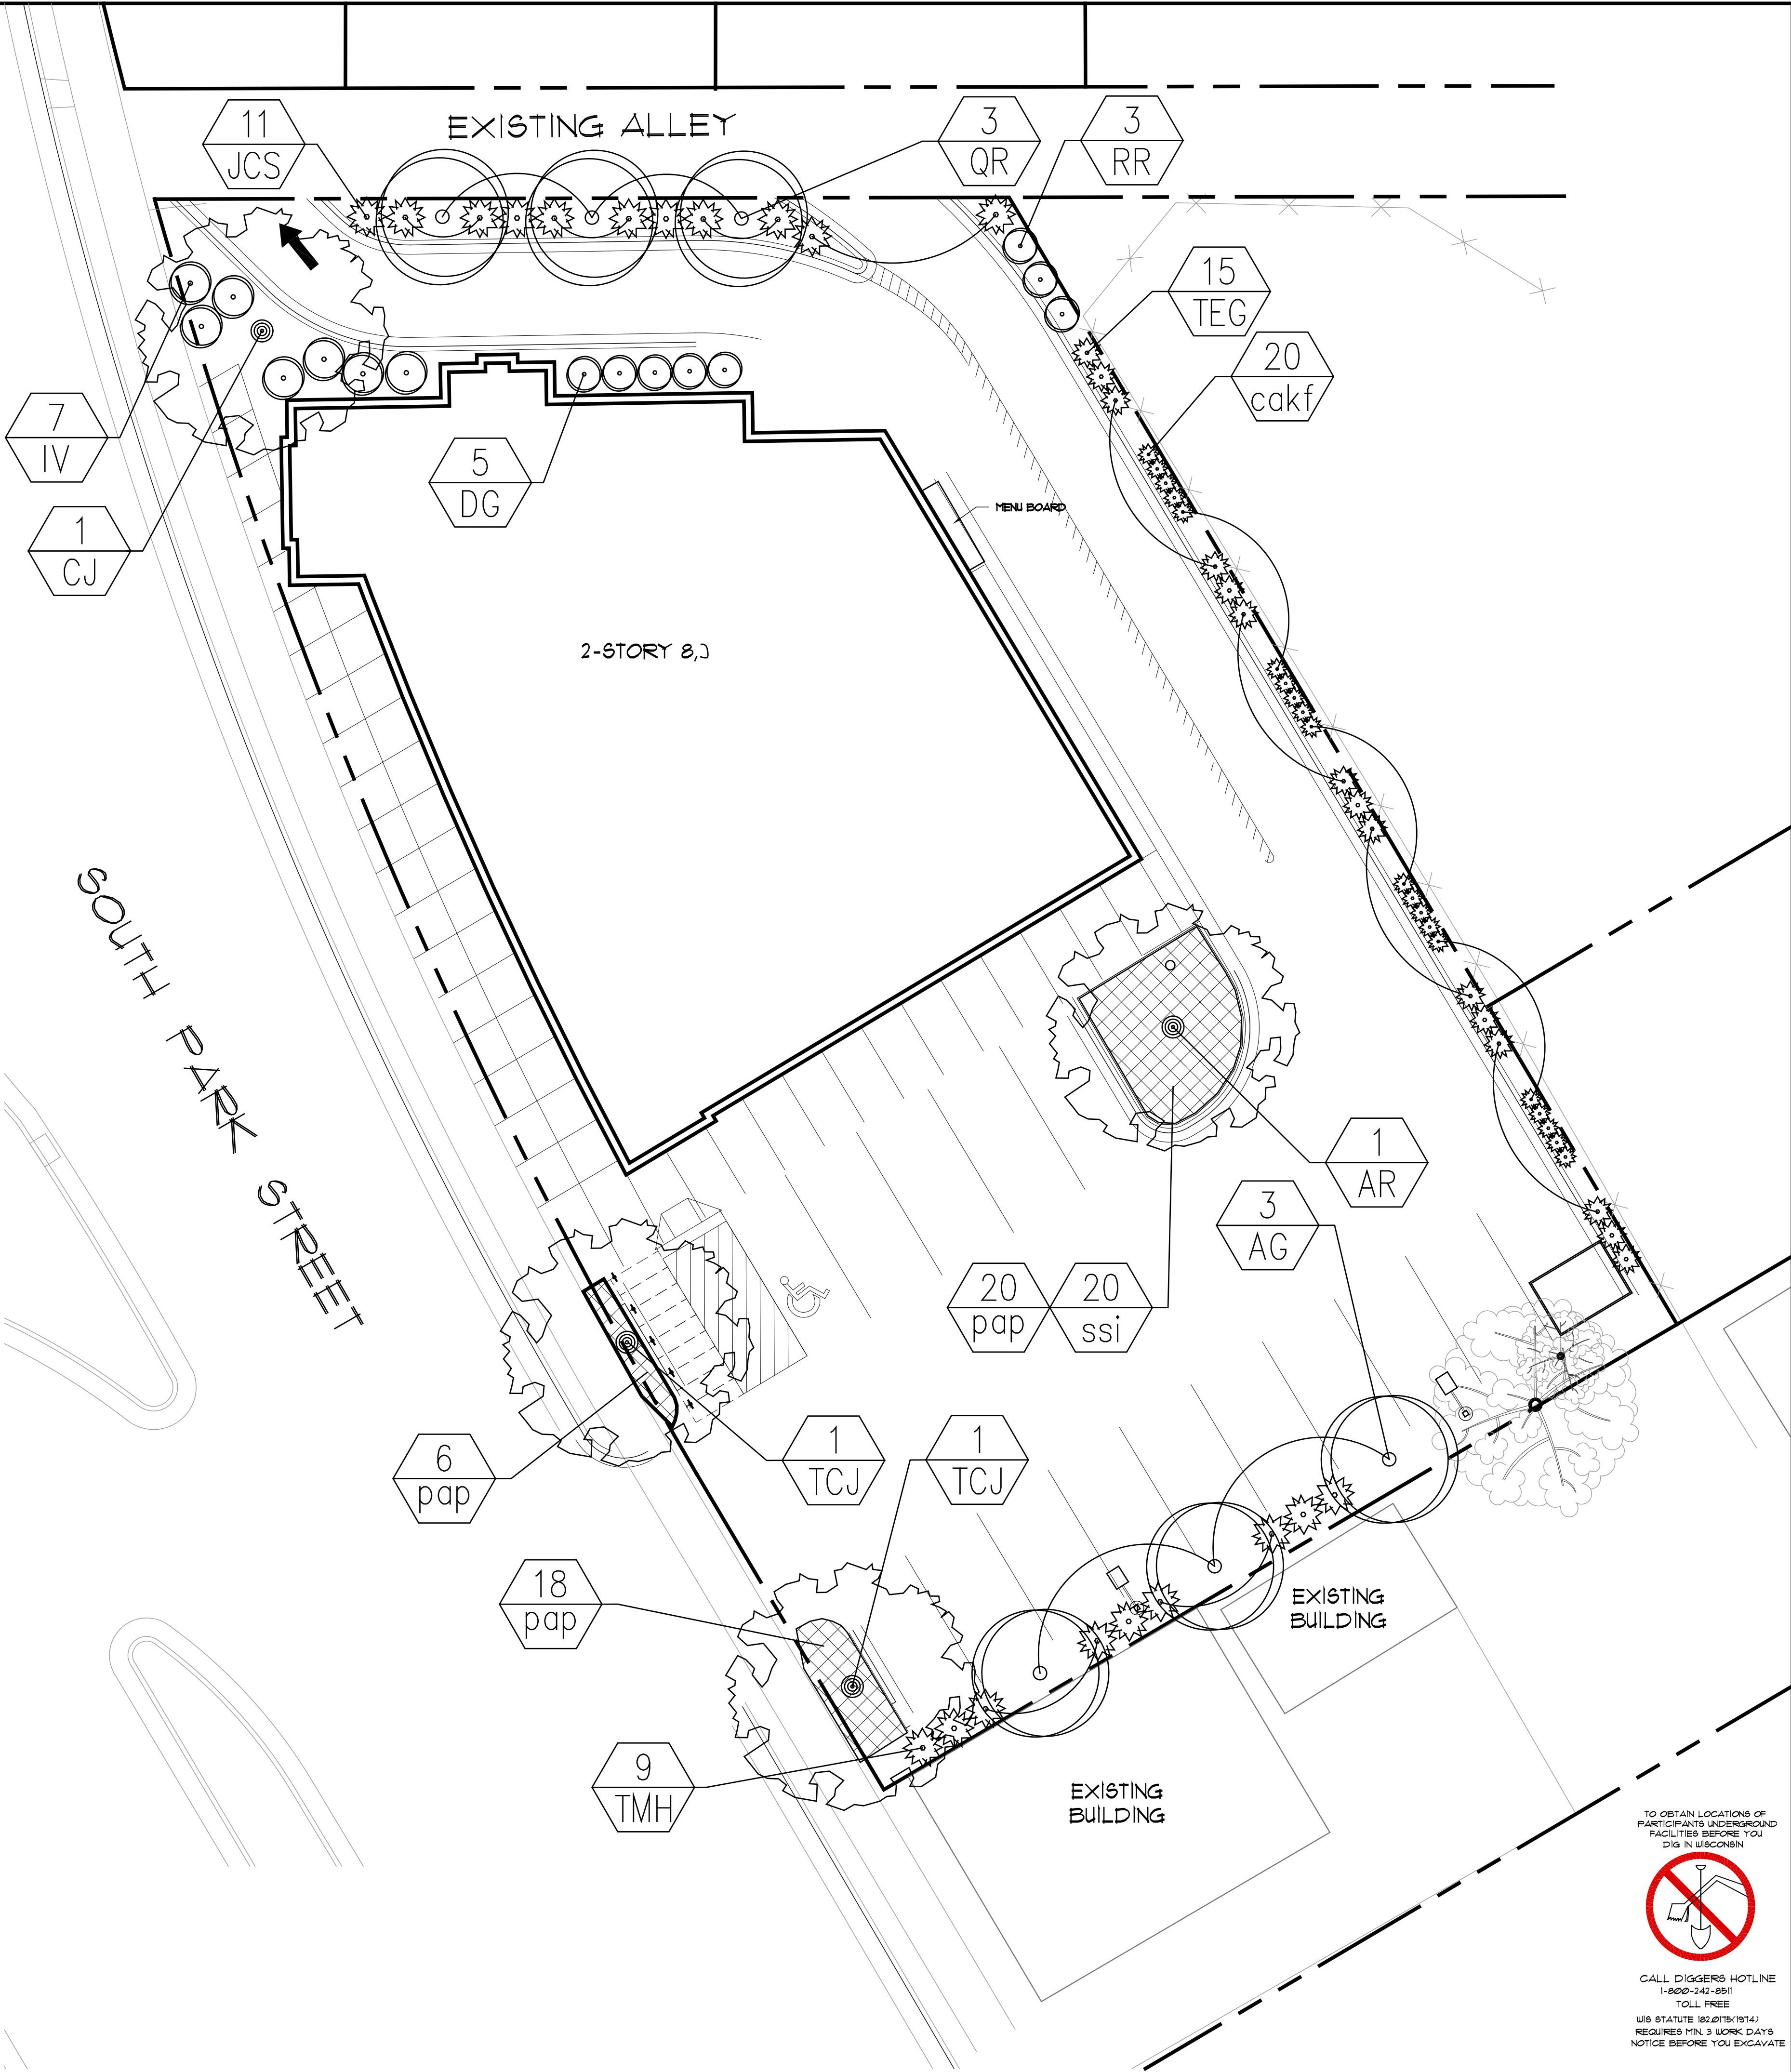

634 West Main Street
Madison, WI 537103
608-251-1090
FAX 608-251-1092

REV	DATE

COPYRIGHTED DRAWING
© 2011 TJK Design Build, Inc. ALL RIGHTS RESERVED. NEITHER THIS DOCUMENT NOR THE INFORMATION HEREIN MAY BE REPRODUCED, DISTRIBUTED, USED OR DISCLOSED IN WHOLE OR IN PART, UNLESS EXPRESSLY AUTHORIZED IN WRITING BY TJK DESIGN BUILD, INC.



PROPOSED FACILITY FOR:
ERIN SQUARE
801 SOUTH PARK STREET
MADISON, WISCONSIN

C-15
11.07.11

STATISTICS						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
Calc Zone #2	+	0.7 fc	6.3 fc	0.0 fc	N / A	N / A

LIGHT FIXTURE KEY

- A** COOPER LIGHTING, INVUE 400W MH SINGLE HEAD PARKING LOT LIGHT FIXTURES
MODEL # ICY1-TB-MH-200-SL-DP
12'-0" X 4" 60 STEEL POLE ON 3'-0" CONC. BASE
(15'-0" FROM GRADE)
- B** COOPER LIGHTING, INVUE ENTRI LED WAL-PAC LIGHT FIXTURE
CATALOG # ENC-C01-LED-EI-BL4-DP
(9'-0" FROM GRADE)
- C** COOPER LIGHTING, INVUE ENTRI LED WAL-PAC LIGHT FIXTURE
CATALOG # ENC-C01-LED-EI-G2U-DP
(8'-0" FROM GRADE)

1 PHOTOMETRIC PLAN
C-1.6 SCALE: 1" = 10'-0"

