



Department of Public Works
Engineering Division
Robert F. Phillips, P.E., City Engineer

City-County Building, Room 115
210 Martin Luther King, Jr. Boulevard
Madison, Wisconsin 53703
Phone: (608) 266-4751
Fax: (608) 264-9275
engineering@cityofmadison.com
www.cityofmadison.com/engineering

Assistant City Engineer

Gregory T. Fries, P.E.
Kathleen M. Cryan

Principal Engineer 2

Christopher J. Petykowski, P.E.
John S. Fahrney, P.E.

Principal Engineer 1

Christina M. Bachmann, P.E.
Mark D. Moder, P.E.
Janet Schmidt, P.E.

Facilities & Sustainability

Jeanne E. Hoffman, Manager
Bryan Cooper, Principal Architect

Mapping Section Manager

Eric T. Pederson, P.S.

Financial Manager

Steven B. Danner-Rivers

June 26, 2018

NOTICE OF ADDENDUM
ADDENDUM NO. 1
CONTRACT NO. 8184

Westview Hills Sewer and Water Assessment District 2018

Revise and amend the contract document(s) for the above project as stated in this addendum, otherwise, the original document shall remain in effect.

PROPOSAL:

The following bid items have been changed. Please download the current proposal on <http://www.bidexpress.com>.

Action	Bid Item	Description	Units
CHANGE	21063	EROSION MATTING, CLASS 1, TYPE A - ORGANIC	S.Y.
CHANGE	21073	EROSION MATTING, CLASS II, TYPE C - ORGANIC	S.Y.
CHANGE	20401	CLEARING UNDISTRIBUTED	ID
CHANGE	20406	GRUBBING UNDISTRIBUTED	ID
CHANGE	20221	TOPSOIL	SY
CHANGE	20701	TERRACE SEEDING	SY
ADD	90033	PRUNE TREE	EACH

PLAN SET

REMOVE AND REPLACE PLAN SHEETS U-1, U-2, U-3, U-4, & U-5.

SPECIAL PROVISIONS:

INSERT SENTENCE TO BID ITEM 900300 REMOVE AND RESTORE DRIVEWAY WITH CULVERTS (DRIVEWAY AND CULVERTS IN KIND)

UNDER DESCRIPTION

The stone around the driveway culverts shall be removed and replaced by the contractor in kind. The disturbance limits on the plan set show which driveways are anticipated for removal and replacement. If additional driveways with culverts require removal for the purposes of construction, it must be agreed upon with Construction Engineer.

BID ITEM

INSERT

BID ITEM 90033 – PRUNE TREE

DESCRIPTION

This bid item includes all work, materials, labor, equipment and incidentals necessary to prune existing trees as needed to perform the work under this contract without causing damage to the existing trees. There are several trees within the project limits that potentially have limbs hanging out into the work zone; however, due to the location of the tree on private property, City Forestry is unable to perform the pruning prior to construction.

Prior to performing any pruning, the Contractor shall first verify with the Engineer that pruning is necessary. All pruning work shall be performed in accordance with the City of Madison Standard Specifications Section 209.4(e) and Standard Detail Drawing 2.05. The Contractor shall limit the pruning to only what is absolutely necessary to perform the work under this contract, but the amount of pruning should be sufficient so that no limbs are damaged while performing the work. The pruning on any tree shall be limited to a maximum height of 14 ft. The Contractor shall have a certified arborist on site while performing any tree pruning, and the arborist shall direct the pruning activities.

The Contractor shall also note that some species of trees may not be pruned at the time of year that this work is to take place. If the Contractor encounters any of these types of trees, work shall be performed around the tree without any pruning.

METHOD OF MEASUREMENT

Prune Tree shall be measured by each tree acceptably pruned.

BASIS OF PAYMENT

This item, measured as provided above, will be paid for at the contract unit price, which price shall be payment in full for furnishing all material, labor, tools, equipment, and incidentals necessary to complete this item of work.

Please acknowledge this addendum on page E1 of the contract documents and/or in Section E: Bidder's Acknowledgement on Bid Express.

Electronic version of these documents can be found on the Bid Express web site at:

June 26, 2018

Page 3



<http://www.bidexpress.com>

If you are unable to download plan revisions associated with the addendum, please contact the Engineering office at 608-266-4751 receive the material by another route.



A handwritten signature in black ink, appearing to read "Robert Phillips". The signature is stylized with large, flowing loops.

Robert F. Phillips, P.E., City Engineer



RFP:lrc

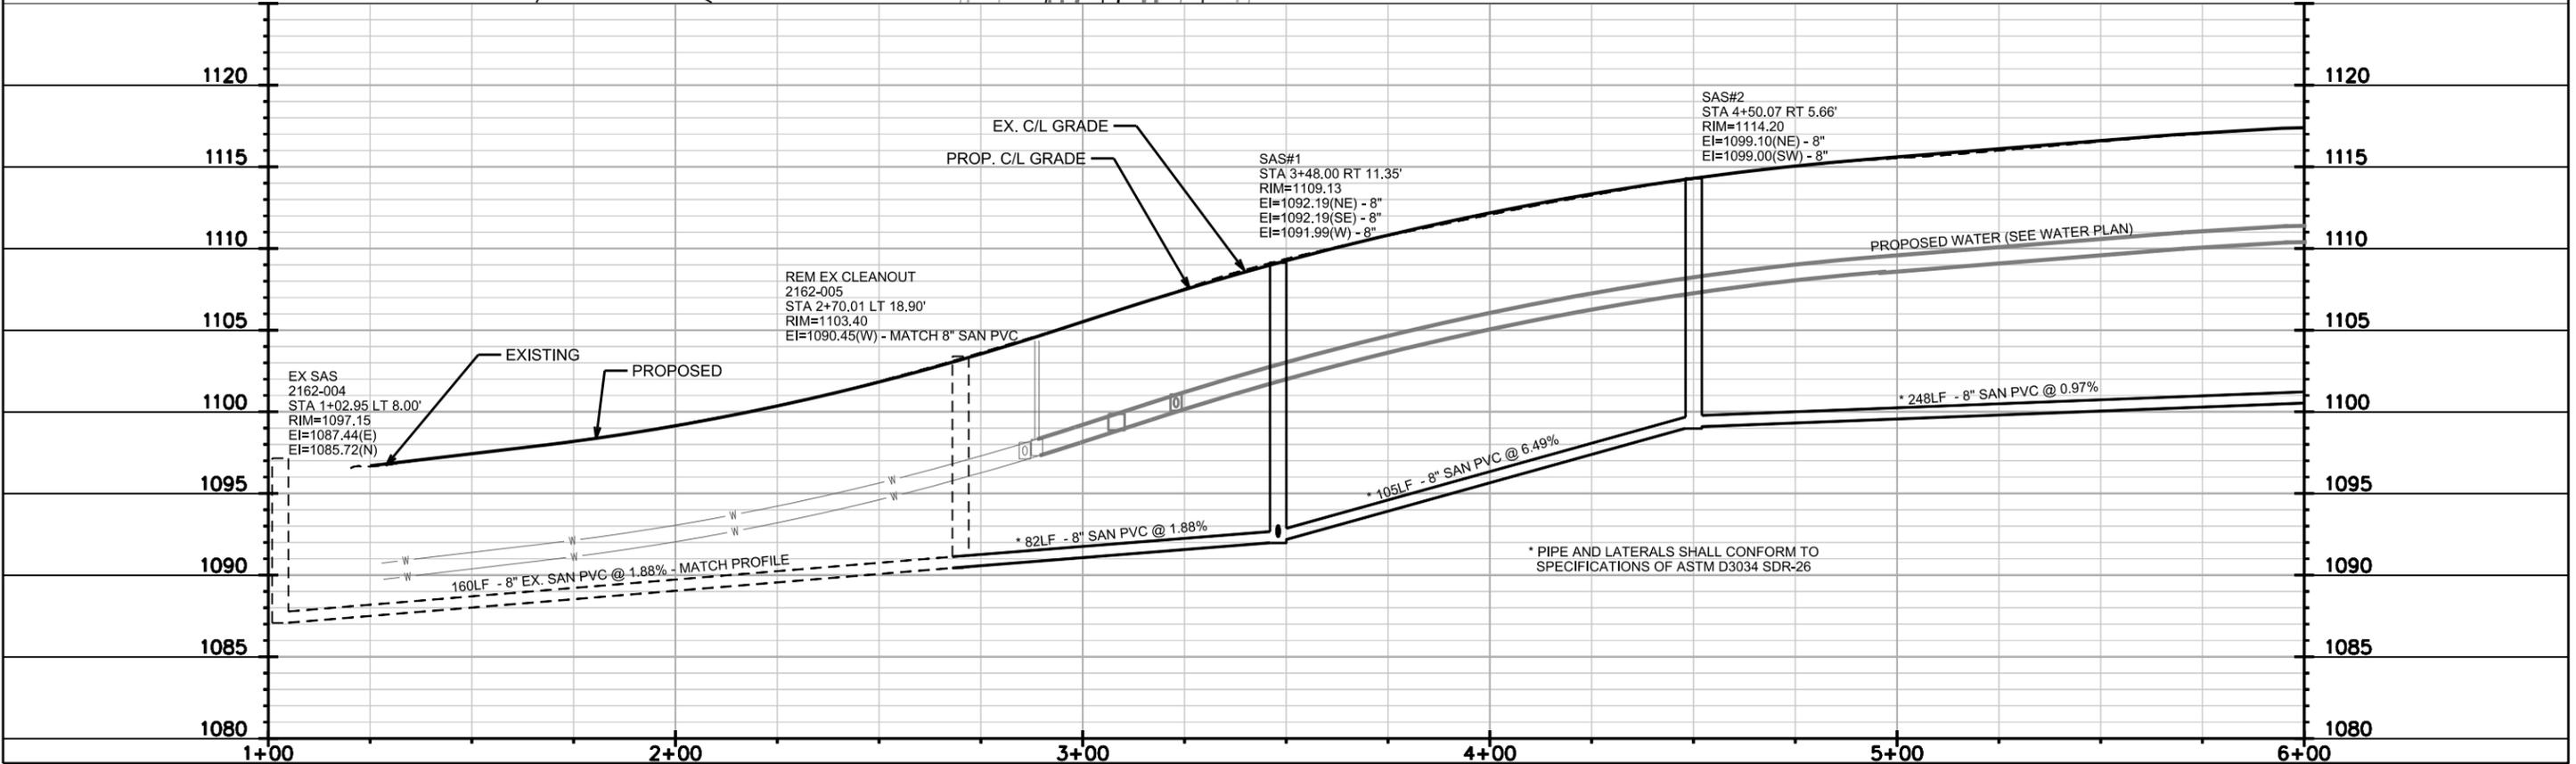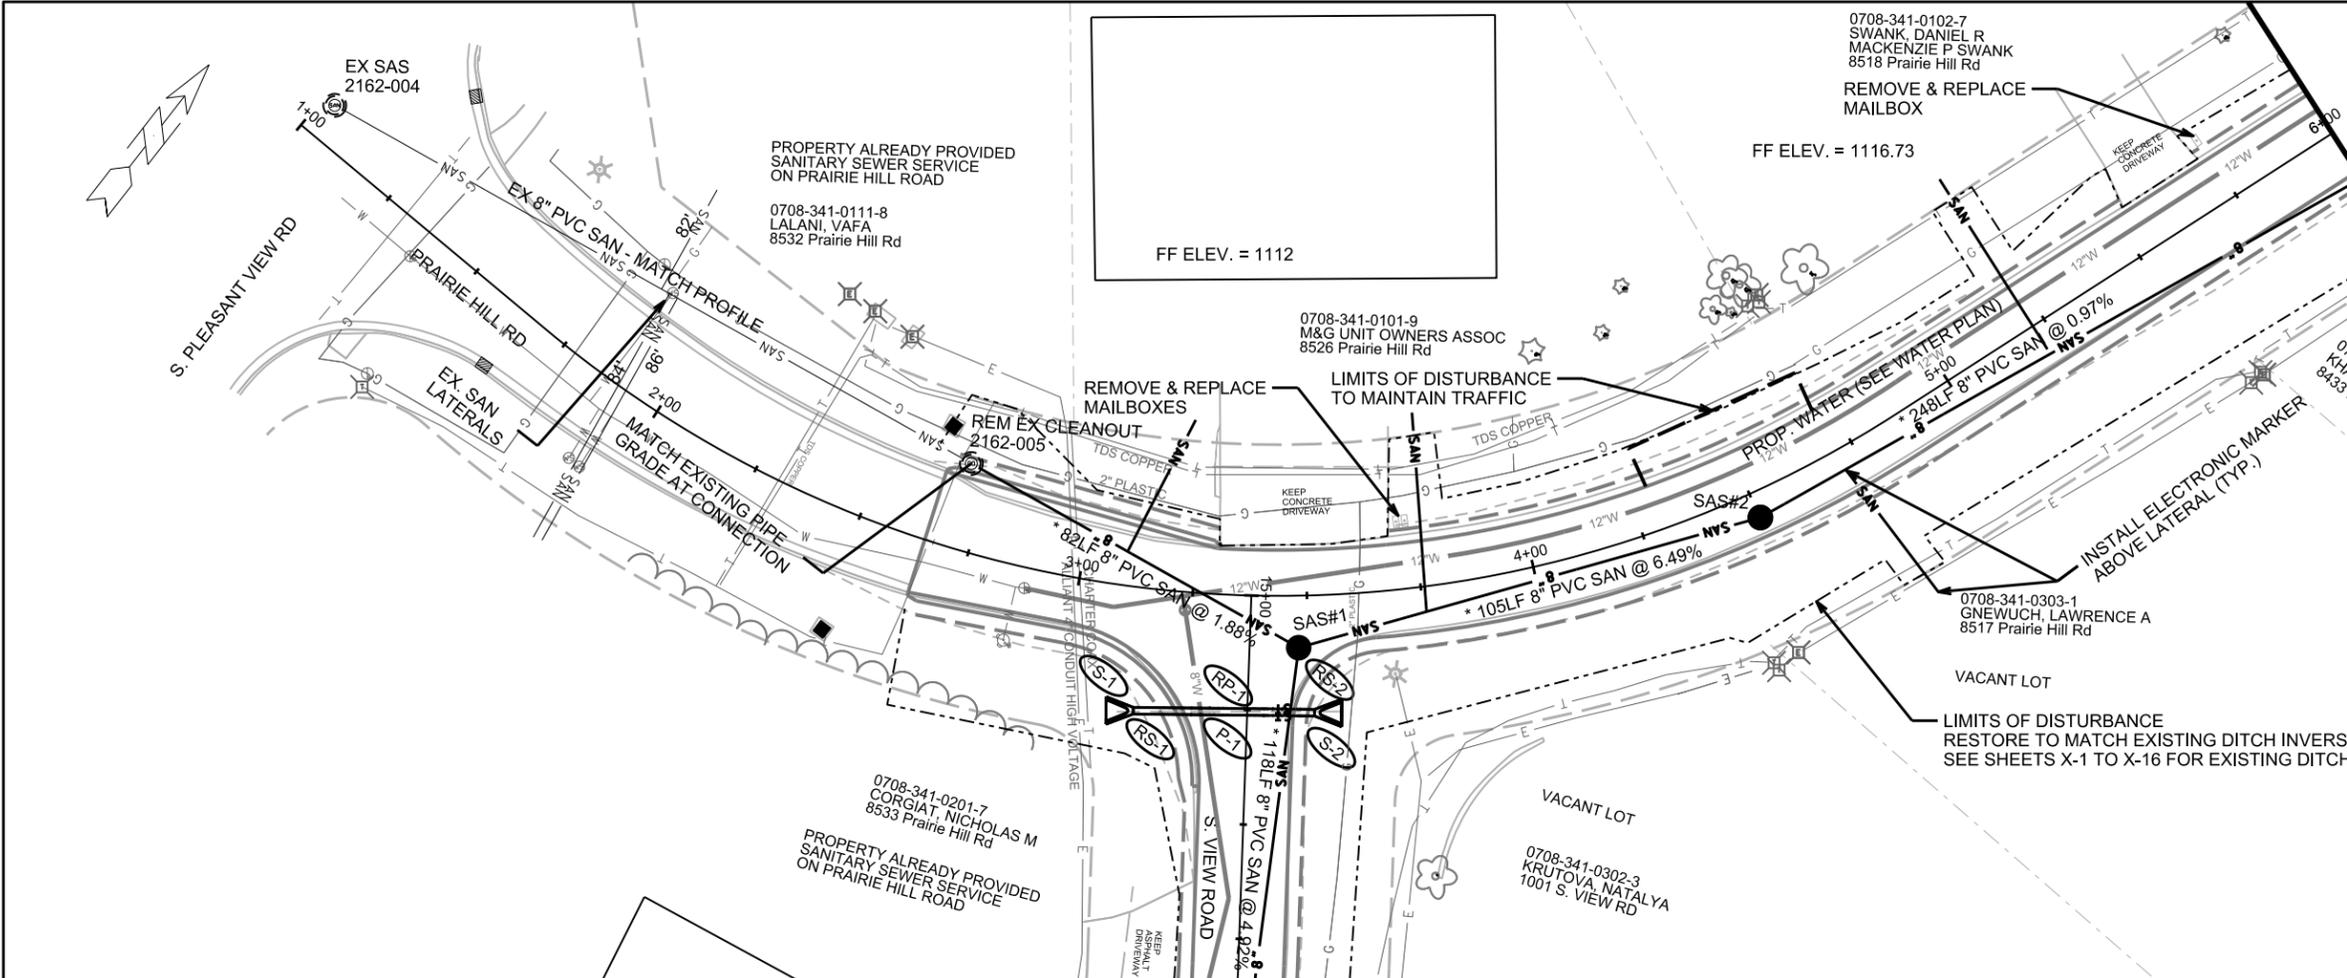

PLOT SCALE: _____
 PLOT NAME: _____
 REV. DATE: _____
 ORIGINATOR: CITY OF MADISON, STREETS DIVISION

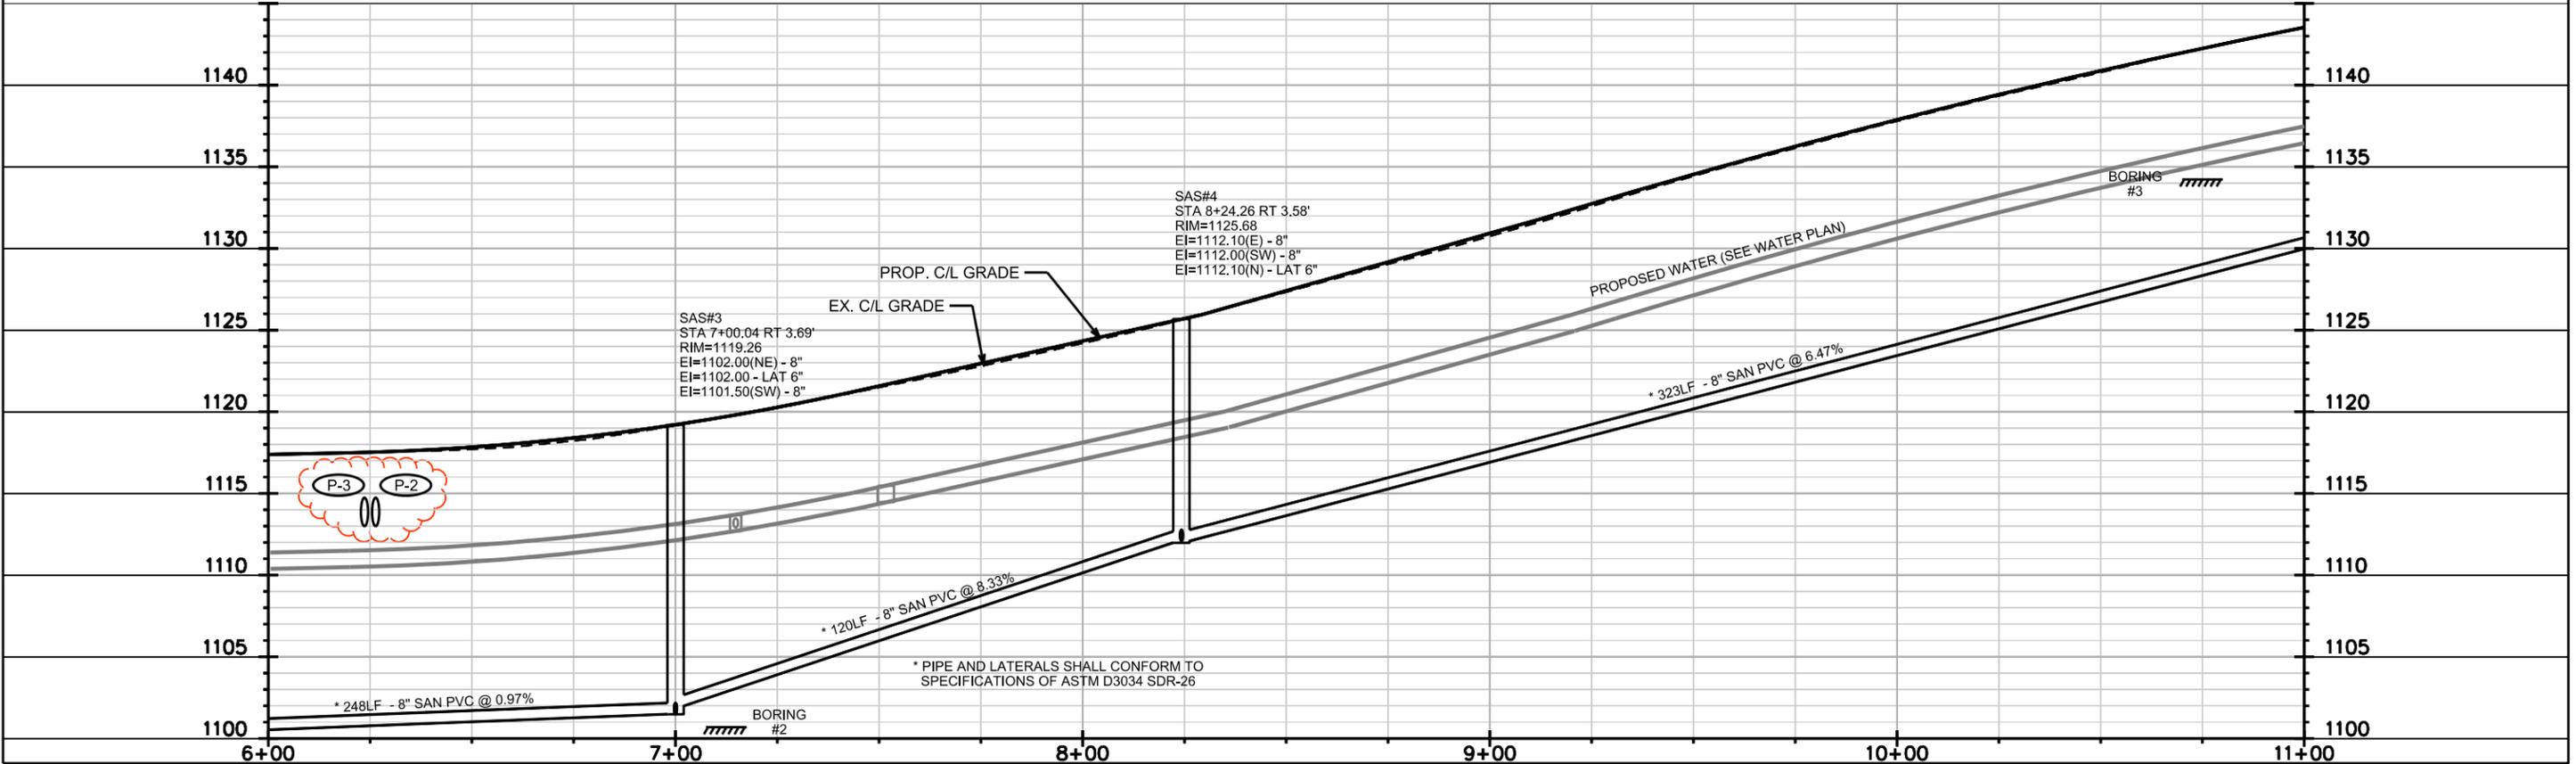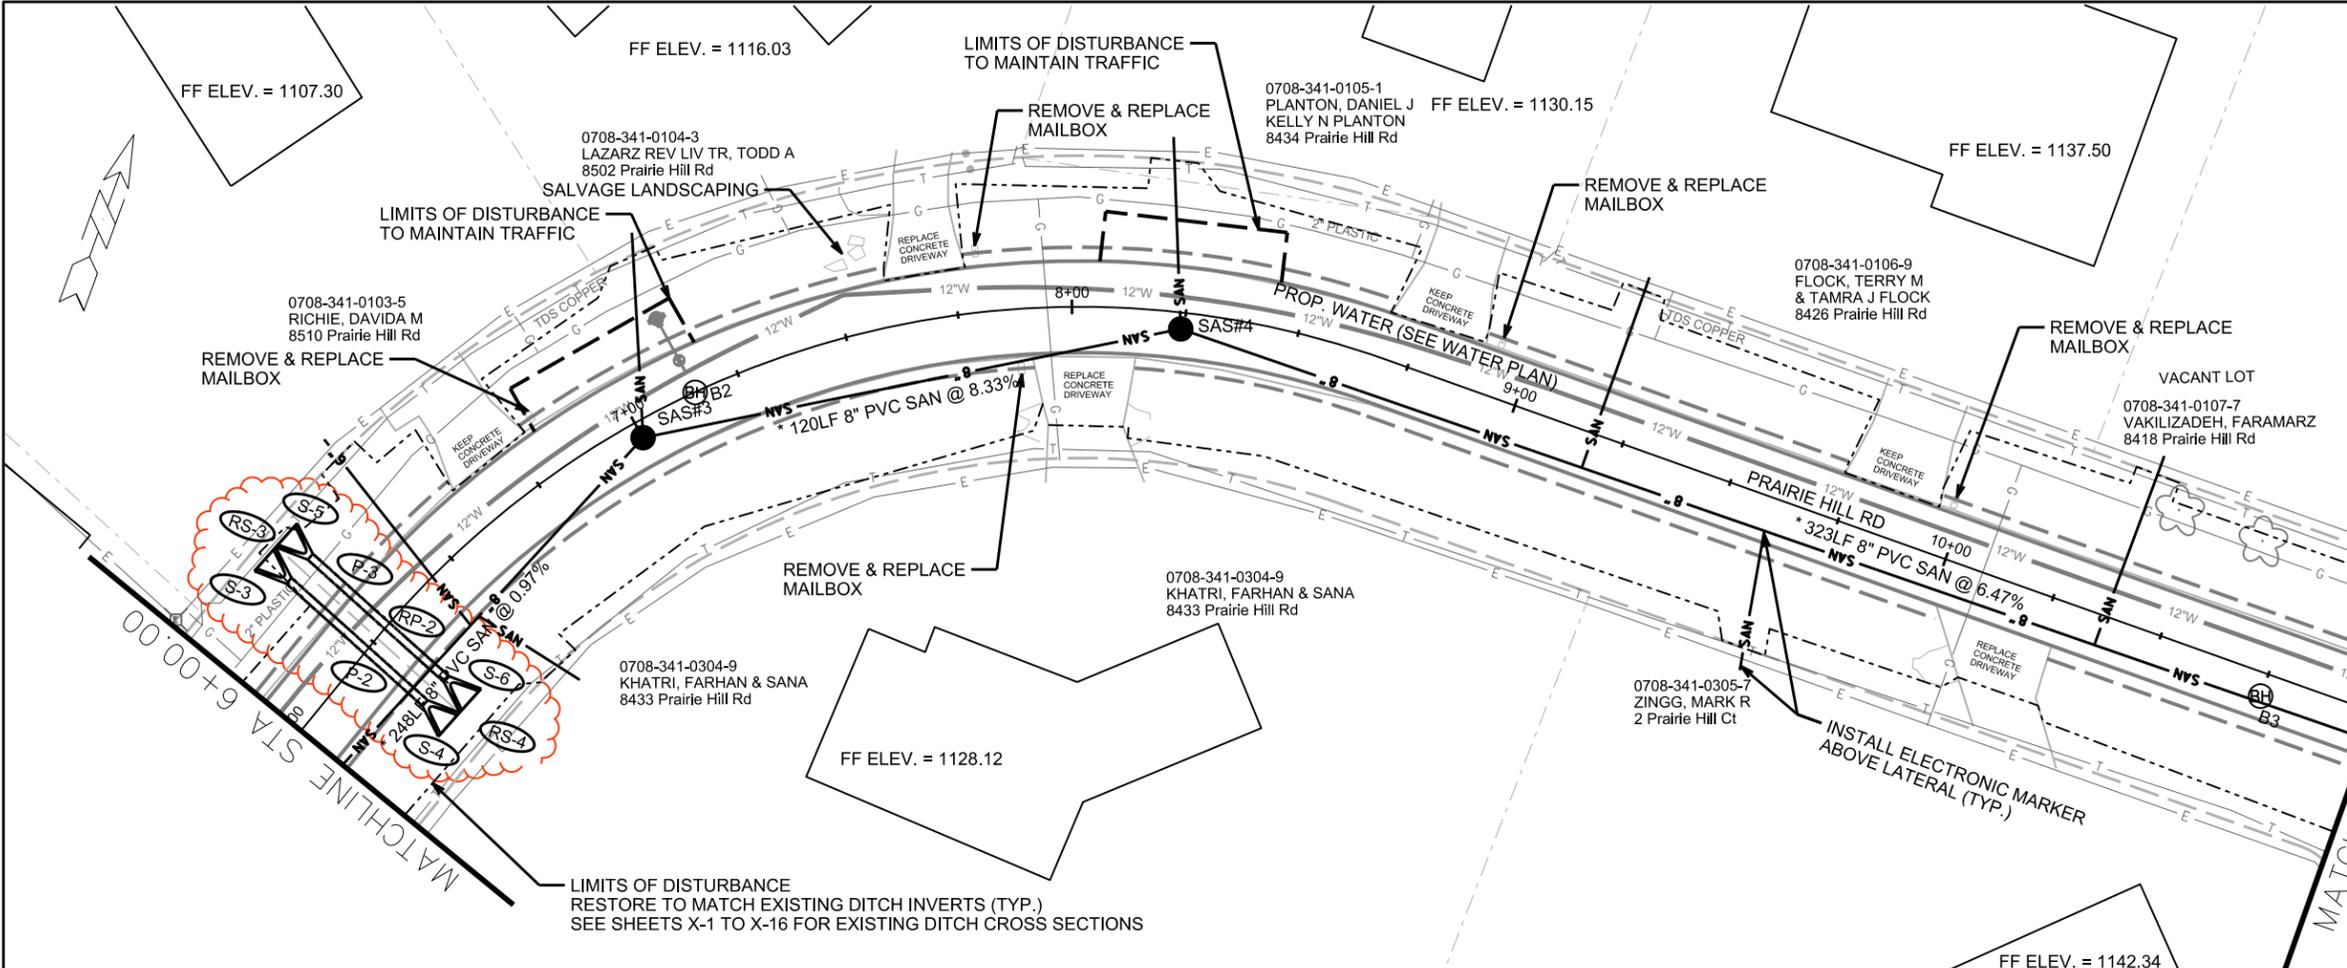

PLOT SCALE: _____
 PLOT NAME: _____
 REV. DATE: _____
 ORIGINATOR: CITY OF MADISON, STREETS DIVISION

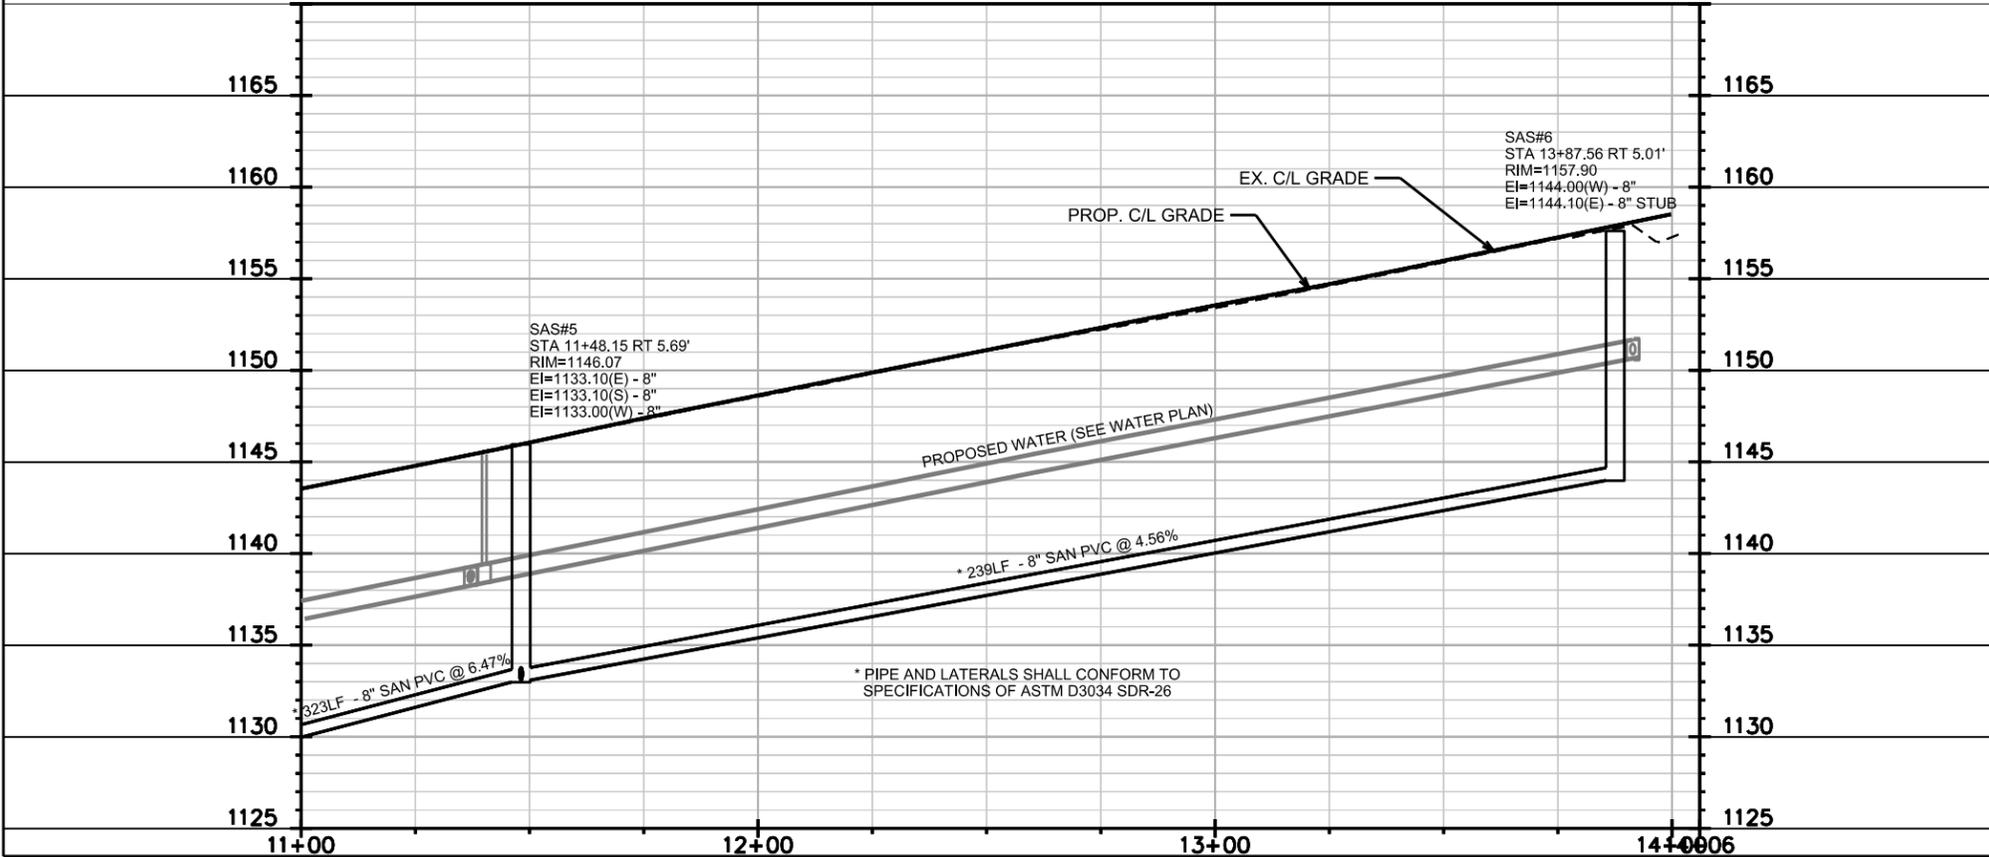
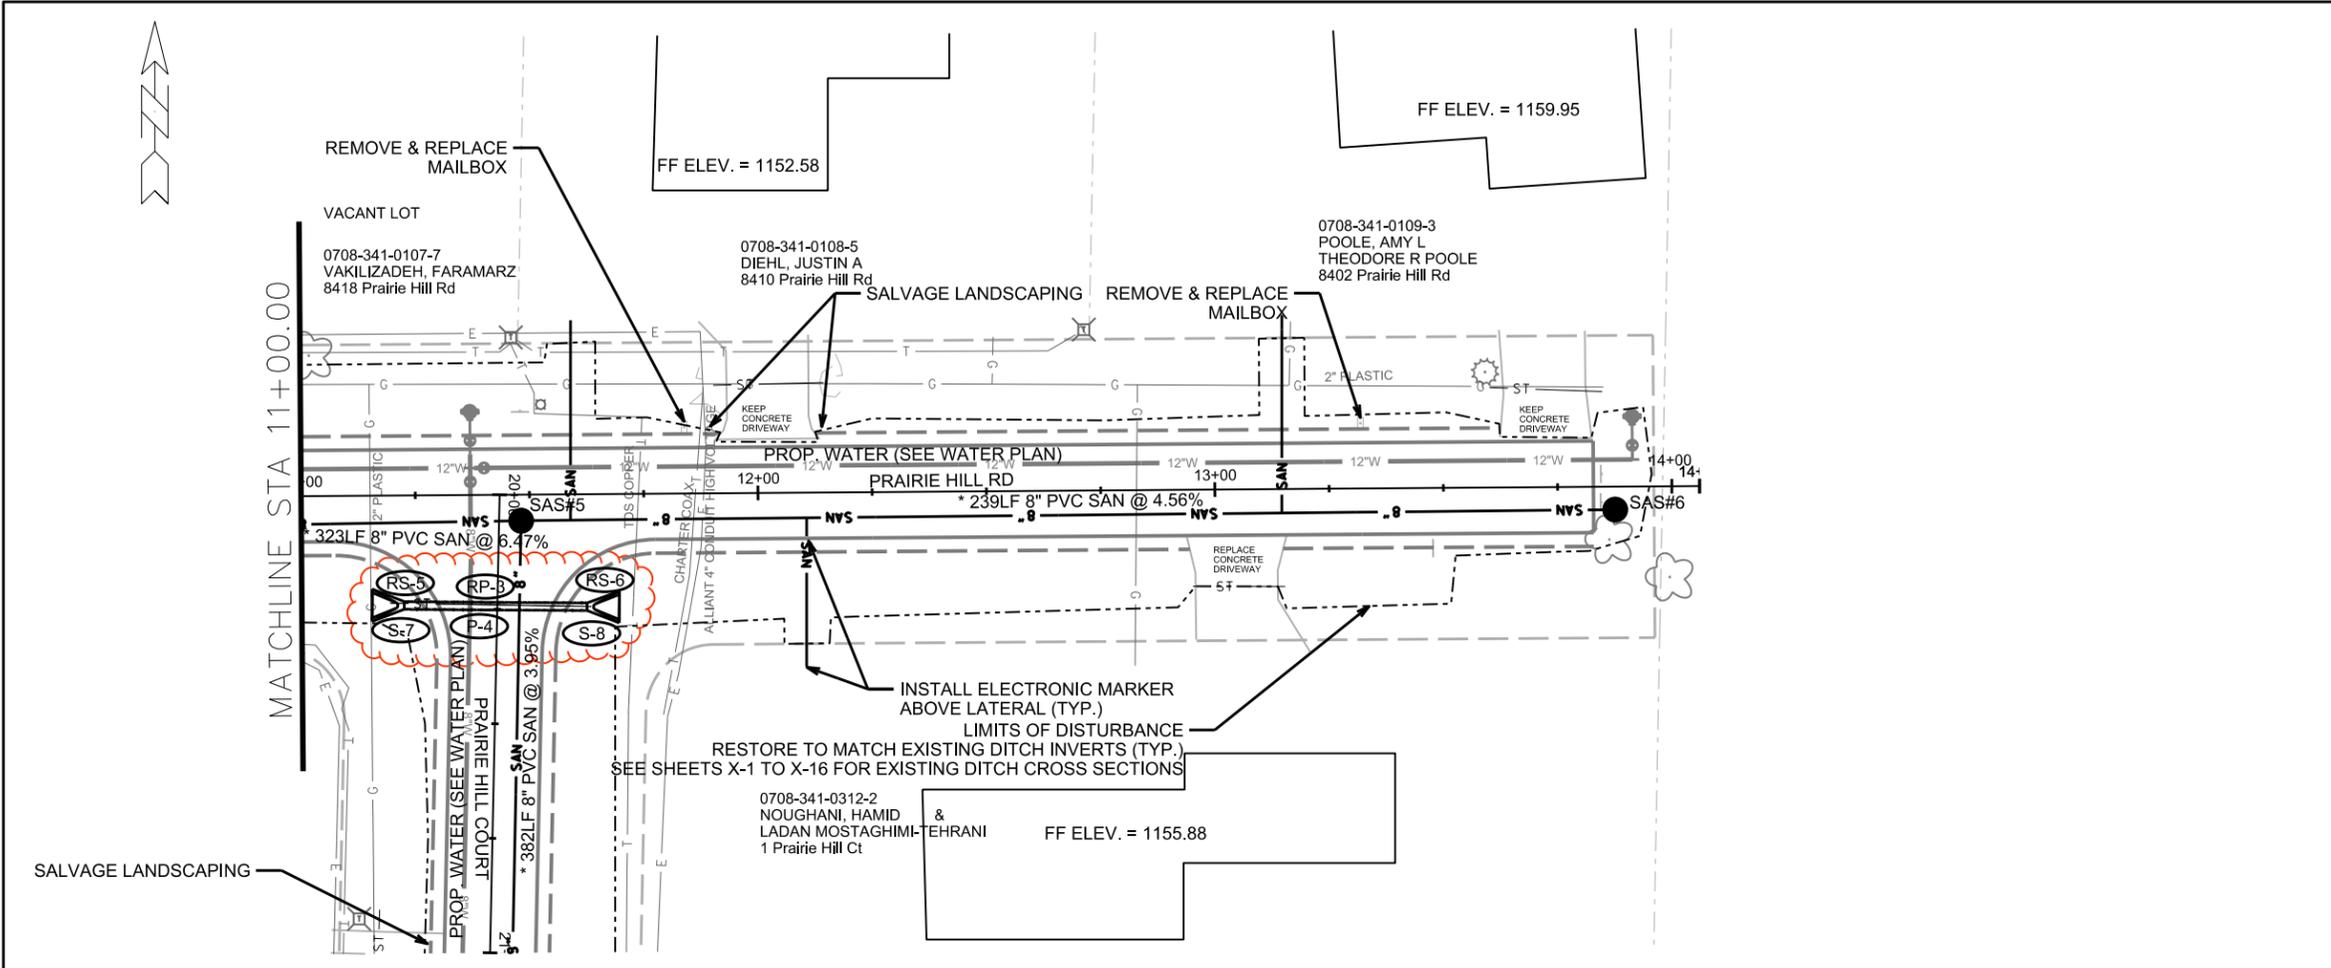


PLOT SCALE: _____


PLOT NAME: _____

REV. DATE: _____

ORIGINATOR: CITY OF MADISON, STREETS DIVISION

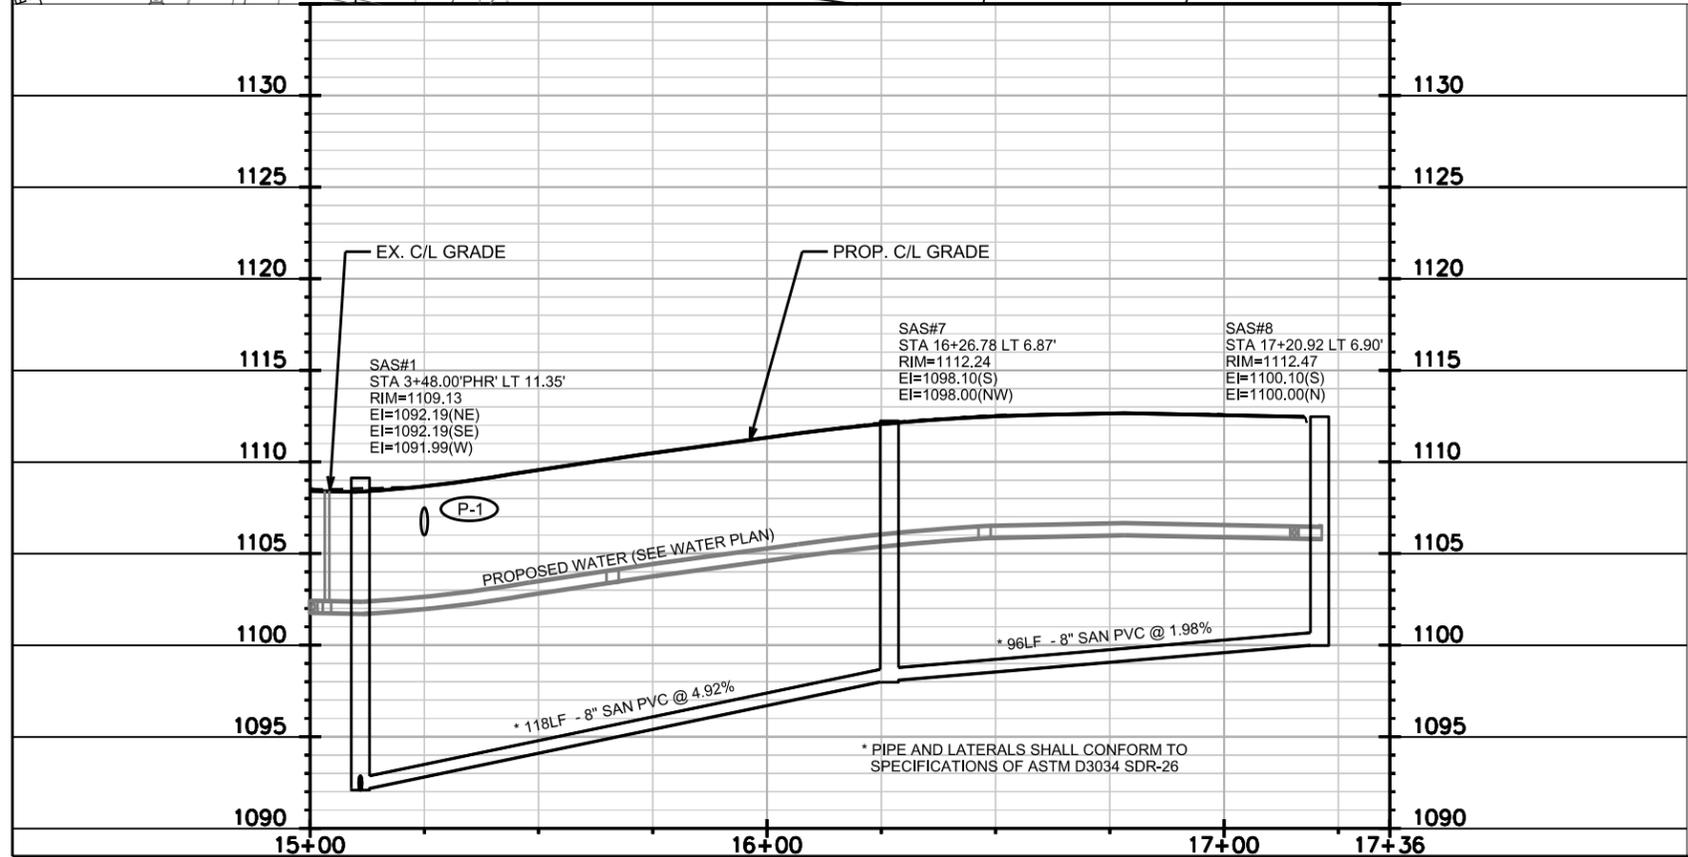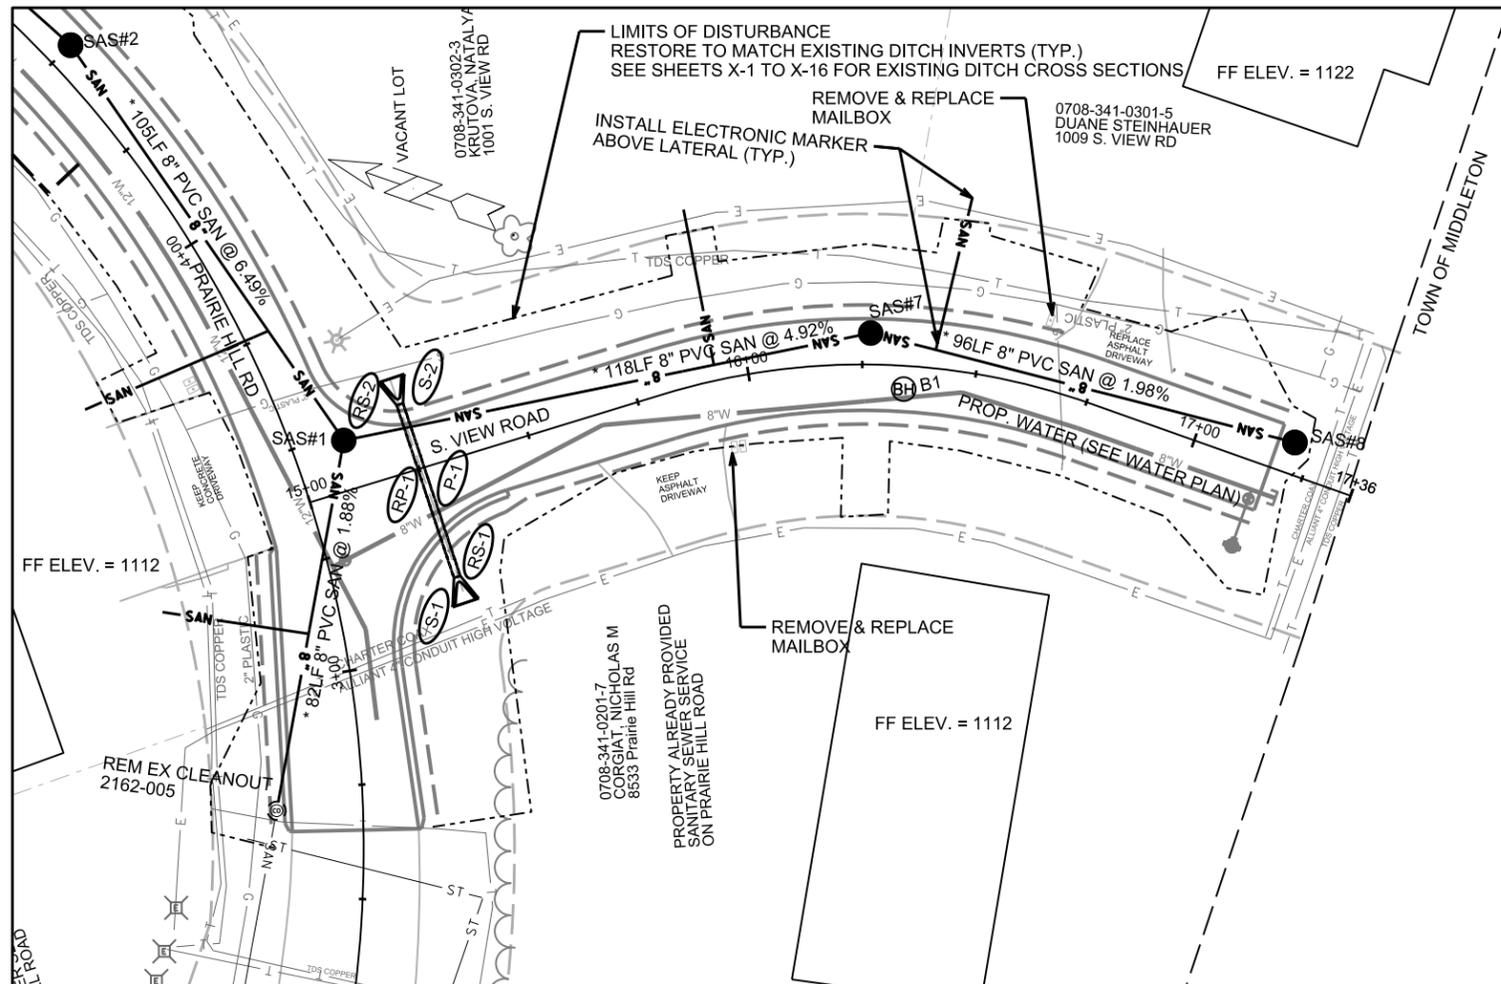

PLOT SCALE: _____
 PLOT NAME: _____
 REV. DATE: _____
 ORIGINATOR: CITY OF MADISON, STREETS DIVISION

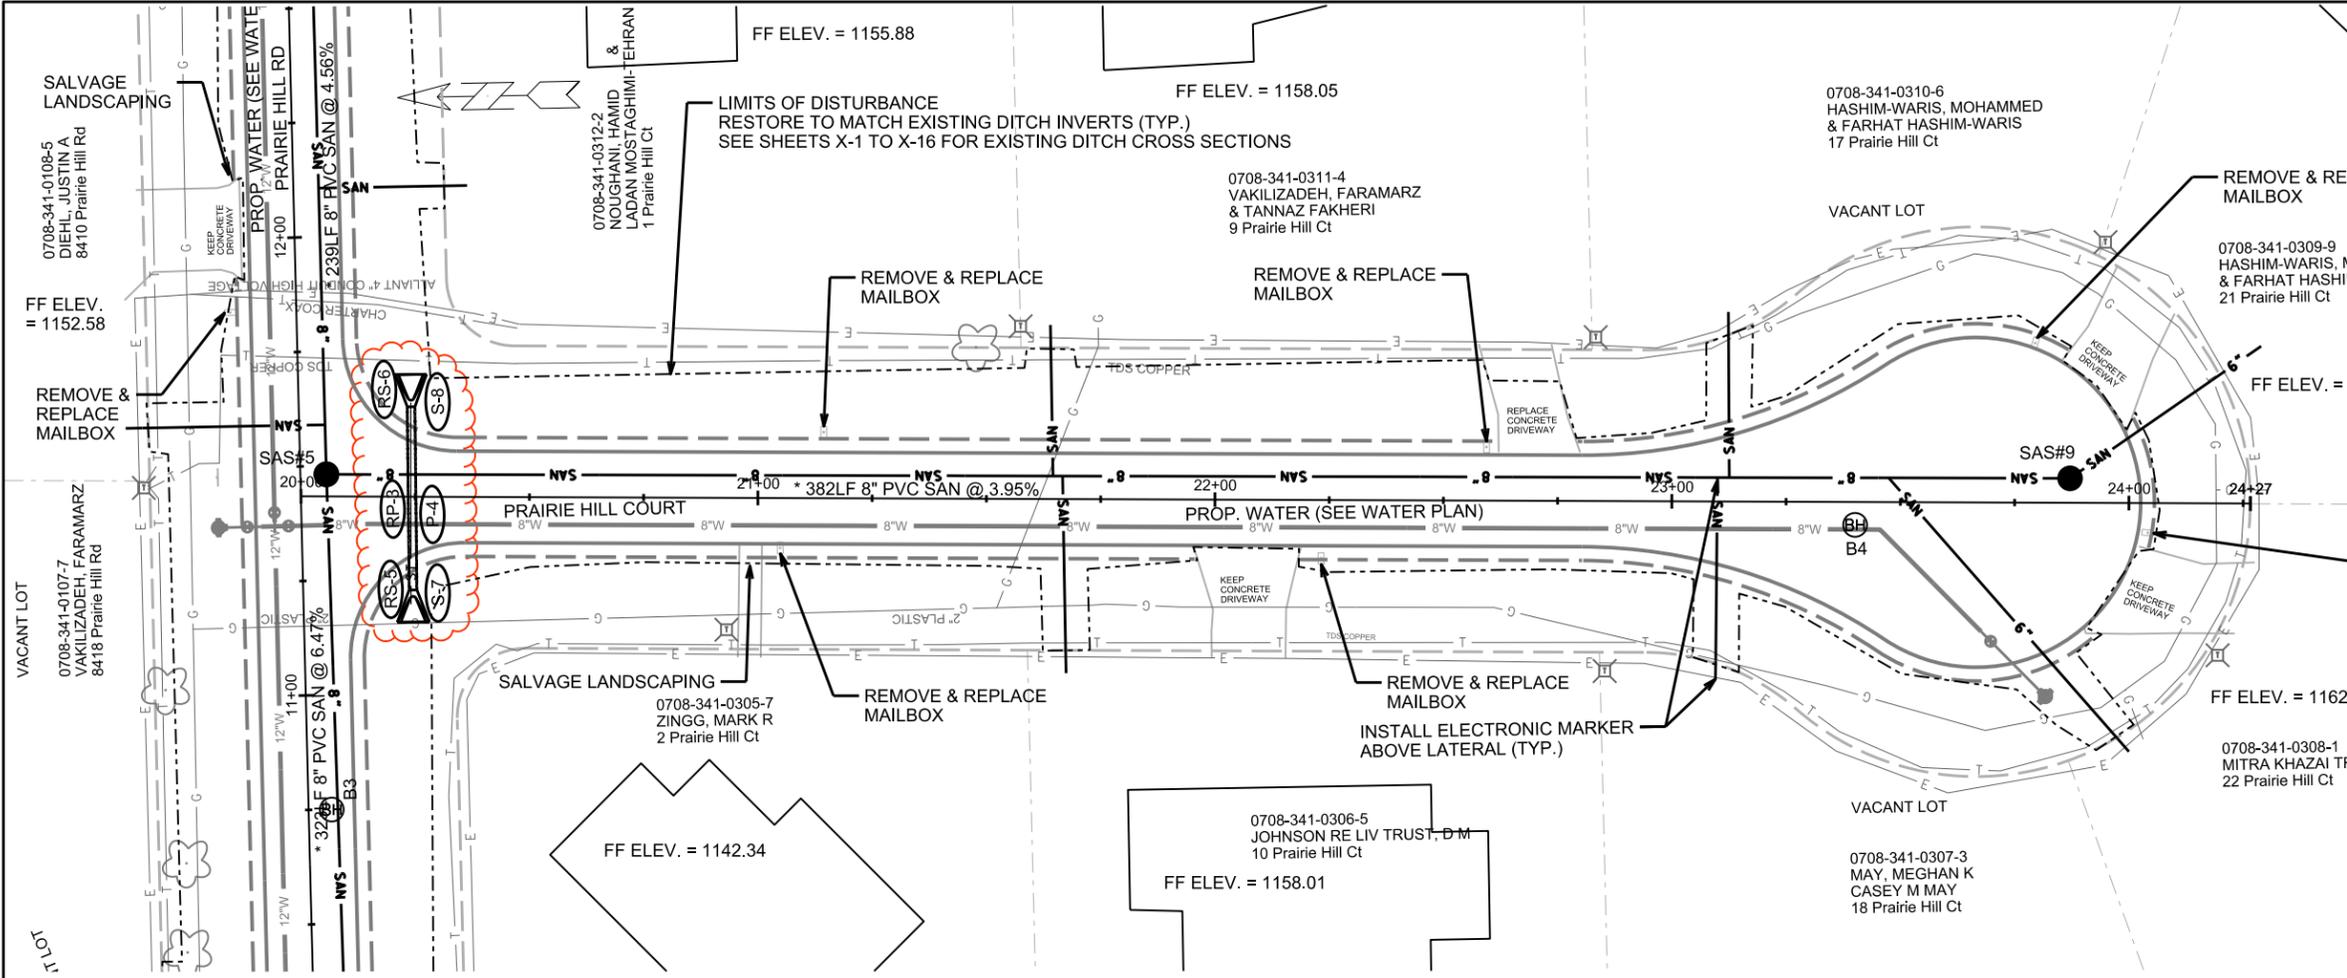

PLOT SCALE: _____
 PLOT NAME: _____
 REV. DATE: _____
 ORIGINATOR: CITY OF MADISON, STREETS DIVISION