



Department of Public Works
Engineering Division

PROJECT CONTACTS

» **Project Manager:** Andrew Zwieg
 608-266-9219, azwieg@cityofmadison.com
Construction Inspector: Paul Lauby
 608-520-2378, PLauby@cityofmadison.com

**Construction Fact and Details Sheet:
 PROPOSED HUDSON AVE, MILLER AVE, WILLARD AVE, CENTER
 AVE, & SOMMERS AVE PROJECT**

Construction Schedule & Impacts

Construction Schedule: Work is scheduled to begin in late March or early April of 2024 and be completed in summer of 2024.

The estimated limits of the phasing are shown on the map.

The top layer of asphalt and final pavement marking for phase 1 construction will be placed and coordinated with the final paving in phase 2 in the summer of 2024.

Traffic Impacts: Miller Avenue, Willard Avenue, Center Avenue, and Sommers Avenue will be closed to all traffic until the project is complete. Local access will be provided, but driveways may not be accessible at times when work is being performed in front of the driveway and while new curb and gutter, sidewalk, and driveway aprons are constructed. Driveway closures may last up to a cumulative total of 20 days. No parking is allowed within the construction zone during working hours (7AM to 7PM), so when driveways are inaccessible, residents will need to park on the adjacent streets outside the limits of the current construction phase.

Traffic impacts on Atwood Avenue at Hudson Avenue are not anticipated, however if during construction it is determined that work may impact traffic, single lane closures in each direction will be allowed.

Phase 2 Construction Sequence: The contractor will begin with installing sanitary sewer and laterals at the intersection of Hudson Avenue and Oakridge Avenue and work toward Atwood Avenue as well as Willard Avenue east of Ohio Avenue and work toward Miller Avenue, then Sommers Avenue working toward Hudson Avenue. Following sanitary sewer installation, the contractor will install storm sewer throughout the project and prepare the gravel street for concrete and asphalt work. Concrete work is anticipated at the end of May and all of June. During this time, driveways will be closed for multiple days to allow for concrete drying time. The contractor will provide notice ahead of the driveway closure. Asphalt paving is anticipated at the end of June.

MGE is planning gas main work on Hudson Avenue from Oakridge Ave to Atwood Ave in March and April. MGE is planning to remove all the sidewalk along the west side of the street to install a new 8-inch main. MGE’s work will overlap with the City’s reconstruction work.

Water Shut-offs: There are no planned water shut-offs. Emergency shut-offs are possible if existing main is damaged during construction. Affected properties will be notified as soon as possible.

Refuse Collection: It will be the contractor’s responsibility to allow for refuse collection to continue during construction. Please mark your address on your cart to make sure it is returned if moved. We ask that you place your carts at the street the evening prior to or at the very latest 6:00 a.m. the morning of your scheduled refuse/recycling day.

Landscaping: Existing landscaping plantings within the terrace (between curb & sidewalk) will be impacted. If you wish to save any landscaping, it should be removed prior to the start of work in 2023. Stone or brick pavers within the terrace you wish to save should be removed prior to construction & reinstalled by you after construction is complete.


Project Details – Proposed Work

Sanitary Sewer: The City will replace the existing sewer main with 8” PVC pipe on all streets in the project limits and in most cases replace laterals from the main to the property line.

Water Main: The City will not replace the water main with the project.

Storm Sewer: The City will replace and improve the storm sewer system in the street and at intersections.

Project Location Map

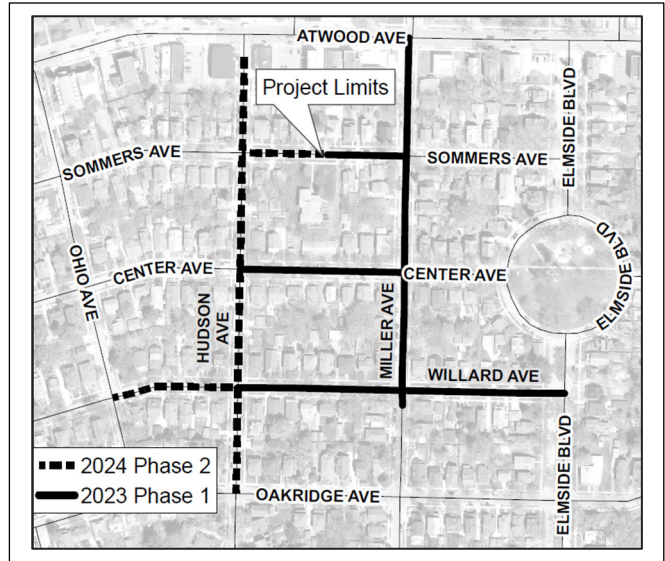

Street: The City will replace all of the asphalt, gravel base, curb and gutter, concrete terrace walks (concrete walk between curb and sidewalk), spot replace sidewalk as needed, and replace driveway aprons.

Driveway Aprons: Driveway aprons constructed with the project will be replaced with concrete per the City of Madison standard detail.

Bus Pads: Bus pads will not be installed with the project.

Street Lights: There are no proposed changes to street lighting within the project limits.

Traffic Signals: There are no proposed changes to the traffic signal at the corner of Atwood Avenue and Hudson Avenue.

Trees: Terrace trees are the process of being pruned to provide required clearance for construction equipment. There are not planned tree removals with phase 2 of construction. If, during construction, it is determined that any additional trees must be removed, adjacent property owners will be notified prior to removal of the tree. The trees within the project limits that remain may have roots trimmed during construction.

Project Website: <https://www.cityofmadison.com/engineering/projects/hudson-miller-willard-center-sommers-reconstruction>.